

# STATE GEOLOGICAL SURVEY OF KANSAS

FRANKLIN D. MURPHY, M. D.,  
Chancellor of the University, and ex officio Director of the Survey

FRANK C. FOLEY, Ph. D.,  
State Geologist and Director

## *Division of Ground Water*

V. C. FISHEL, B. S.,  
Engineer in Charge

---

### BULLETIN 136

---

## GEOLOGY AND GROUND-WATER RESOURCES OF CLAY COUNTY, KANSAS

By KENNETH L. WALTERS and CHARLES K. BAYNE

*Prepared by the United States Geological Survey and the State  
Geological Survey of Kansas, with the cooperation of the Division  
of Sanitation of the Kansas State Board of Health, and the Division  
of Water Resources of the Kansas State Board of Agriculture*



*Printed by authority of the State of Kansas  
Distributed from Lawrence*

JUNE 1959

---

PRINTED IN  
THE STATE PRINTING PLANT  
TOPEKA, KANSAS  
1959

  
27-6124

**STATE OF KANSAS**  
GEORGE DOCKING, *Governor*

**STATE BOARD OF REGENTS**  
CLEMENT H. HALL, *Chairman*

WHITLEY AUSTIN  
CLAUDE C. BRADNEY  
GEORGE B. COLLINS  
RAY EVANS

CHARLES V. KINCAID  
LEON N. ROULIER  
RUSSELL R. RUST  
HARRY VALENTINE

**MINERAL INDUSTRIES COUNCIL**

B. O. WEAVER, *Chairman*  
HOWARD CAREY  
SIMEON S. CLARKE  
LEE H. CORNELL  
E. W. HENKLE  
GEORGE K. MACKIE, JR.

BRIAN O'BRIAN, *Vice-chairman*  
CHARLES COOK  
JOE E. DENHAM  
DANE HANSEN  
CHARLES F. SPENCER  
W. L. STRYKER

**STATE GEOLOGICAL SURVEY OF KANSAS**

FRANKLIN D. MURPHY, M. D., Chancellor of the University of Kansas  
and ex officio Director of the Survey

FRANK C. FOLEY, Ph. D., State Geologist and Director  
WILLIAM W. HAMBLETON, Ph. D., Associate State Geologist and Associate Director  
RAYMOND C. MOORE, Ph. D., Principal Geologist  
BETTY ALVORD, Secretary

**STRATIGRAPHY, AREAL GEOLOGY, AND  
PALEONTOLOGY**

John M. Jewett, Ph. D., Geologist  
Wallace Lee, E. M., Geologist Emeritus  
Daniel F. Merriam, M. S., Geologist  
R. O. Kulstad, M. S., Geologist  
William Ives, M. S., Geologist  
Stanton M. Ball, M. S., Geologist  
Carolyn Ingels, Stenographer  
Dorothy Wheeler, Clerk-Typist

**PETROGRAPHY, MINERALOGY, AND X-RAY**  
Ada Swineford, Ph. D., Petrographer  
Paul C. Franks, M. S., Geologist

**OIL AND GAS**

Edwin D. Goebel, M. S., Geologist  
Paul L. Hilpman, M. S., Geologist  
Claude Shenkel, Jr., Ph. D., Geologist \*  
Wells W. Rood, Scout  
Ruby Marcellus, Well Sample Curator  
Rhett J. Noever, Clerk-Typist  
Carol S. Laughlin, Clerk-Typist  
Sharon L. Schick, Clerk-Typist  
Anna Flory, Laboratory Assistant

**INDUSTRIAL MINERALS AND GEOCHEMISTRY**

Russell T. Runnels, M. S., Chemist  
Walter E. Hill, Jr., A. B., Chemist  
Kenneth E. Rose, M. S., Metal. Engr.\*  
Wanda N. Waugh, Chemist  
Karmie Galle, B. S., Chemist  
Agnes Bouton, Clerk-Stenographer

**MINERAL ECONOMICS AND COAL**

Walter H. Schoewe, Ph. D., Geologist

**PETROLEUM ENGINEERING**

Floyd Preston, Ph. D., Petroleum Engr.

**SOUTHEASTERN KANSAS FIELD OFFICE**

Allison L. Hornbaker, M. S., Geologist  
Douglas L. Beene, B. S., Geologist  
Maxine Stewart, Clerk-Stenographer

**PUBLIC INFORMATION AND EDUCATION**

Grace Muilenburg, B. S., Pub. Rel. Dir.  
Joetta Remby, Clerk-Typist

**WICHITA WELL SAMPLE LIBRARY**

Della B. Cummings, Curator  
Ivetta Maple, Clerk

**CERAMICS**

Norman Plummer, A. B., Ceramist  
Maynard P. Bauleke, Ph. D., Ceramist  
William B. Hladik, Ceramist  
Clayton Crosier, M. S., Civil Engr.\*  
Clarence Edmonds, Ceramist

**PUBLICATIONS AND RECORDS**

Ralph H. King, Ph. D., Geologist, Editor  
Margaret Buie, B. A. E., Chief Draftsman  
Joan A. Smith, B. F. A., Draftsman  
Jack H. Riegler, Draftsman  
Darlyne Williams, B. F. A., Draftsman  
Judy Crissler, Draftsman  
Key Sung Kwak, Draftsman  
William J. Swartz, Draftsman  
Lucille Robertson, Clerk-Typist  
Lila M. Watkins, Clerk-Typist

**COOPERATIVE DEPARTMENTS WITH UNITED STATES GEOLOGICAL SURVEY**

**GROUND-WATER RESOURCES**

V. C. Fishel, B. S., Engineer in Charge  
Charles K. Bayne, A. B., Geologist  
Henry V. Beck, Ph. D., Geologist \*  
Stuart W. Fader, B. S., Engineer  
Warren G. Hodson, M. S., Geologist  
Charles W. Lane, B. S., Geologist  
William N. Lockwood, M. S., Geologist  
Leslie E. Mack, M. S., Geologist  
Don E. Miller, B. S., Geologist  
Howard G. O'Connor, B. S., Geologist

**MINERAL FUELS RESOURCES**

William Gellinger, Core Driller  
E. L. Reavis, Core Driller  
Nancy L. Chamney, B. F. A., Draftsman  
Eleanor Gulley, Stenographer  
Lottie I. Rodenhaus, Clerk-Typist

**TOPOGRAPHIC SURVEY CENTRAL REGION**

W. D. Johnson, Jr., B. S., Geologist  
W. L. Adkison, B. S., Geologist  
D. L. Kennedy, Regional Engineer  
W. S. Beames, District Engineer

**SPECIAL CONSULTANTS:** Eugene A. Stephenson, Ph. D., Petroleum Engineering; Robert W. Wilson, Ph. D., Vertebrate Paleontology; A. B. Leonard, Ph. D., Invertebrate Paleontology.

**COOPERATING STATE AGENCIES:** State Board of Agriculture, Division of Water Resources, Robert Smrha, Chief Engineer; State Board of Health, Division of Sanitation, Dwight Metzler, Chief Engineer and Director, and Willard O. Hilton, Geologist.

\*Intermittent employment only



# CONTENTS

	PAGE
Abstract .....	9
Introduction .....	9
Purpose and scope of investigation .....	9
Location and extent of area .....	10
Previous investigations .....	11
Methods of investigation .....	11
Well-numbering system .....	12
Acknowledgments .....	12
Geography .....	14
Topography and drainage .....	14
Climate .....	14
Population .....	15
Transportation .....	16
Agriculture .....	17
Mineral resources .....	17
Construction materials .....	17
Concrete aggregate .....	17
Road metal .....	18
Mineral filler .....	18
Structural stone .....	18
Agricultural limestone .....	18
Oil .....	18
Gypsum .....	19
Ceramic raw materials, by Norman Plummer .....	19
Geology .....	22
Summary of stratigraphy .....	22
Pre-Cenozoic geologic history .....	22
Paleozoic Era .....	22
Mesozoic Era .....	23
Cenozoic geologic history .....	23
Tertiary Period .....	23
Quaternary Period—Pleistocene Epoch .....	23
Ground water .....	24
Principles of occurrence .....	24
Source .....	25
Artesian conditions .....	25
The water table and movement of ground water .....	26
Recharge .....	27
Recharge from precipitation .....	27
Percolation from outside the area .....	28
Seepage from streams and ponds .....	28
Discharge .....	28
Discharge by evaporation and transpiration .....	28
Discharge by seeps and springs .....	29

	PAGE
Discharge by wells .....	29
Recovery .....	29
Principles of recovery .....	29
Types of wells .....	30
Dug wells .....	30
Driven wells .....	31
Drilled wells .....	31
Utilization of water .....	31
Domestic and stock supplies .....	31
Industrial supplies .....	31
Public supplies .....	32
Clay Center .....	32
Clifton .....	32
Green .....	33
Idana .....	33
Longford .....	33
Morganville .....	33
Wakefield .....	33
Irrigation supplies .....	35
Chemical character of water .....	36
Chemical constituents in relation to use .....	38
Dissolved solids .....	38
Hardness .....	39
Iron .....	42
Fluoride .....	42
Chloride .....	42
Nitrate .....	43
Sulfate .....	43
Chemical constituents in relation to irrigation .....	49
Hydrologic properties of water-bearing materials .....	50
Aquifer-test determination of transmissibility and permeability .....	50
Theis recovery method of determining transmissibility .....	51
Straight-line graphical method of determining transmissibility and storage coefficients .....	52
Turner aquifer test .....	64
Summary .....	65
Rock units and their water-bearing properties .....	65
Permian System .....	65
Wolfcampian Series—Chase Group .....	65
Barneston Limestone .....	66
Doyle Shale .....	68
Winfield Limestone .....	69
Odell Shale .....	69
Nolans Limestone .....	69
Leonardian Series—Sumner Group .....	69
Wellington Formation .....	71
Cretaceous System .....	71
Comanchean Series .....	71

	PAGE
Kiowa Shale .....	71
Gulfian Series—Colorado Group .....	73
Dakota Formation .....	73
Quaternary System .....	74
Pleistocene Series .....	74
Kansan Stage .....	74
Illinoian Stage .....	74
Terrace deposits .....	74
Eolian deposits .....	76
Wisconsinan Stage .....	76
Terrace deposits .....	76
Eolian deposits .....	77
Recent Stage .....	77
Alluvium .....	77
Dune sand .....	78
Records of wells .....	79
Logs of test holes .....	92
References .....	103
Index .....	105



## ILLUSTRATIONS

PLATE	PAGE
1. Areal geology of Clay County . . . . .	(In pocket)
2. Location of wells and test holes and water-table contours in Clay County . . . . .	(In pocket)
3. Geologic cross sections in Clay County . . . . .	(In pocket)
4. A, Rimrock formed by Fort Riley Limestone member, SE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 27, T. 9 S., R. 4 E.; B, Exposure of Winfield Limestone, SE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 19, T. 10 S., R. 4 E. . . . .	67
5. A, Herington Limestone member exposed in road cut, NW $\frac{1}{4}$ sec. 9, T. 9 S., R. 3 E.; B, Hollenberg Limestone member in NW $\frac{1}{4}$ sec. 32, T. 6 S., R. 4 E. . . . .	70
6. A, Faulting in Hollenberg Limestone member in NW $\frac{1}{4}$ sec. 32, T. 6 S., R. 4 E.; B, Concretions in Dakota Formation, NE $\frac{1}{4}$ sec. 17, T. 10 S., R. 1 E. . . . .	72
7. A, Exposure of Pleistocene conglomerate, center south side sec. 10, T. 10 S., R. 2 E.; B, Prominent scarp formed by Wisconsinan terrace, NE $\frac{1}{4}$ sec. 2, T. 6 S., R. 1 E. . . . .	75
FIGURE	
1. Index map of Kansas showing area discussed in this report and other areas in Kansas for which ground-water reports have been published or are in preparation . . . . .	10
2. Map of Clay County illustrating well-numbering system used in this report . . . . .	13
3. Annual precipitation and cumulative departure from normal precipitation at Clay Center . . . . .	15
4. Normal monthly precipitation at Clay Center . . . . .	16
5. Diagrammatic section of well being pumped . . . . .	30
6. Configuration of bedrock surface in Republican River valley . . . . .	34
7. Thickness of saturated material in Republican River valley . . . . .	34
8. Graphic representation of chemical analyses of water from principal water-bearing formations in Clay County . . . . .	37
9. Graphic representation of chemical analyses of water from minor water-bearing formations in Clay County . . . . .	38
10. Nomogram for determining sodium-adsorption ratio of irrigation water . . . . .	46
11. Diagram showing classification of water in Clay County for irrigation use . . . . .	47
12. Depth to water in well 6-1-2ac plotted against time since pumping started . . . . .	56
13. Drawdown in observation wells a, b, and c plotted against time since pumping started, during test using well 6-1-2ac . . . . .	64
14. Depth to water in observation well c plotted against time since pumping stopped, during test using well 6-1-2ac . . . . .	65

# TABLES

TABLE	PAGE
1. Generalized section of outcropping rock units in Clay County .....	20
2. Volumes of saturated material and water in storage in Republican River valley .....	36
3. Analyses of water from typical wells in Clay County .....	40
4. Factors for converting parts per million to equivalents per million .....	45
5. Sodium-adsorption ratios, conductivity, and class of water for irrigation for wells plotted on Figure 11 .....	49
6. Water-level measurements in well 6-1-2ac .....	53
7. Water-level measurements in observation well a, 25 feet from pumped well .....	57
8. Water-level measurements in observation well b, 50 feet from pumped well .....	59
9. Water-level measurements in observation well c, 100 feet from pumped well .....	61
10. Records of wells, springs, and test holes in Clay County .....	80



E LIB

AY



# GEOLOGY AND GROUND-WATER RESOURCES OF CLAY COUNTY, KANSAS

By KENNETH L. WALTERS and CHARLES K. BAYNE

## ABSTRACT

This report describing the geography, geology, and ground-water resources of Clay County, in north-central Kansas, is based on hydrologic and geologic information obtained in the field during the fall of 1953 and the summer of 1954. The field data are given in tables; they include records of 143 wells, chemical analyses of water from 35 representative wells, logs of 28 test holes, and results of pumping (aquifer) tests. In addition, 110 holes were augered to determine the depth to water.

Clay County has an area of about 660 square miles and lies in the Great Plains and Central Lowlands physiographic provinces. Most of it is drained by Republican River; small areas are drained by Fancy Creek and Chapman Creek, which are not tributaries of Republican River. The normal annual precipitation at Clay Center is 27.92 inches, and the mean annual temperature is 55.1°F. Agriculture is the principal occupation in the county.

The rocks that crop out at the surface in Clay County are sedimentary and range in age from Permian to Recent. The oldest formation exposed in the county is the Barneston Limestone. The Dakota Formation, the youngest Cretaceous rock in the county, crops out over a large part of western and northern Clay County. The Permian and Cretaceous rocks are mantled in many places by unconsolidated continental deposits of fluvial and eolian origin representing four stages of the Pleistocene Epoch.

The unconsolidated sand and gravel deposits of Pleistocene age form the principal aquifer in the county. These deposits are thickest and most extensive in the valley of Republican River. The Dakota Formation yields moderate quantities of water to wells in western and northern Clay County. The Barneston Limestone yields small to moderate quantities of water to wells in eastern Clay County. Ground water in the area is recharged principally from local precipitation; underflow from adjacent areas contributes significantly, however. Ground water is discharged mainly by seepage into streams and by transpiration by plants. All municipal and industrial water supplies and most domestic and stock supplies are obtained from wells. Irrigation from wells is practiced extensively in the valley of Republican River.

## INTRODUCTION

### PURPOSE AND SCOPE OF INVESTIGATION

A program of investigation of the ground-water resources of Kansas was begun in 1937 by the United States Geological Survey and the State Geological Survey of Kansas with the cooperation of the Division of Sanitation of the State Board of Health and the Division of Water Resources of the State Board of Agriculture. The investigation of that part of Clay County that lies within the Republican

Valley was integrated with the program of the Interior Department for development of the Missouri River basin. The investigation upon which this report is based was begun in the fall of 1953 and field work was completed in the fall of 1955. It is similar to other investigations that have been completed or are being made in other counties in Kansas. The present status of investigations resulting from this program is shown in Figure 1.

Ground water is one of the principal natural resources of Clay County. Nearly all public, domestic, and industrial water supplies and many stock supplies are obtained from wells. Ground water is being used to some extent for irrigation, and recent interest in irrigation indicates that the use of ground water for this purpose probably will increase greatly in the future. Withdrawal at the present rate has not seriously depleted the ground-water supply or resulted in impairment of the quality of the water by encroachment of water of poor quality, but there is need for an adequate understanding of the quality and quantity of ground water available.

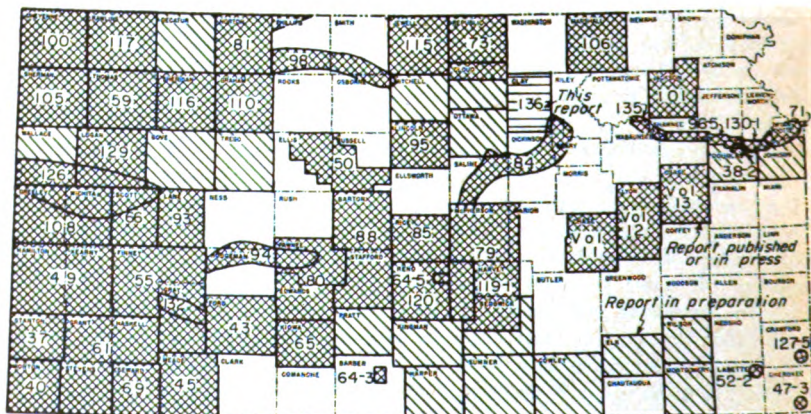


FIG. 1.—Index map of Kansas showing area discussed in this report and other areas for which ground-water reports have been published or are in preparation.

#### LOCATION AND EXTENT OF AREA

Clay County is in north-central Kansas, in the second tier of counties south of the Nebraska line and about 50 miles east of the center of the state. The county is bounded on the west by Ottawa and Cloud Counties, on the north by Washington County, on the east by Riley and Geary Counties, and on the south by Dickinson County; it has an area of 660 square miles.

## PREVIOUS INVESTIGATIONS

The principal studies of the geology and ground-water resources of north-central Kansas that have a direct bearing on Clay County are cited below. Specific references are cited by author and date at appropriate places in the text; all are listed in the references at the end of the report.

The geology of the Upper Cretaceous rocks in Kansas was described by Logan (1897). Darton (1905) made reference to wells in north-central Kansas in a preliminary report on the geology and ground-water resources of the central Great Plains. Haworth (1913) prepared a report on well waters in Kansas in which he discussed the availability of ground water in the Republican River valley. Jewett (1941) prepared a report on the geology of Riley and Geary Counties; in the western part of these counties the geology is very similar to that in eastern Clay County. Plummer and Romary (1947) prepared a report on clay in Kansas in which they described the ceramic characteristics of the clays of the Dakota Formation in the area. Schoewe (1952) in a report on the coal resources of the Dakota Formation described coal reserves in the county. Frye and Leonard (1952) in a report on the Pleistocene geology of Kansas described unconsolidated deposits in the Republican River valley in Clay County.

## METHODS OF INVESTIGATION

One month in the fall of 1953, four months in the summer of 1954, and one month in the fall of 1955 were spent in the field collecting the data upon which this report is based. The geology was mapped on aerial photographs from field observations and from stereoscopic study of the photographs. This information was transferred from the photographs to a base map modified from a map prepared by the Soil Conservation Service of the Department of Agriculture.

Data on the character of the water-bearing material, and on the depth, depth to water, and yield of 143 wells were collected (Table 10). Holes were augered with a power auger at 110 locations in order to gather both geologic and hydrologic information. Additional information on the material below the land surface was obtained by drilling 28 test holes with a hydraulic rotary drilling machine owned by the State Geological Survey of Kansas and operated by E. L. Reavis and William Gellinger. Logs of the test holes were prepared in the field, and the drill cuttings were studied



microscopically in the laboratory. Altitudes at the surface of the wells and test holes were determined by a level party headed by Mr. Reavis using an alidade and plane table.

Several pumping (aquifer) tests were made to determine the hydraulic characteristics of the water-bearing deposits.

Thirty-three samples (two composite) of water from 35 wells and test holes were collected, and chemical analyses of the samples were made by Howard Stoltenberg, chemist in the Water and Sewage Laboratory of the Kansas State Board of Health (Table 3).

#### WELL-NUMBERING SYSTEM

In this report the wells, auger holes, and test holes are numbered according to their location as given by the General Land Office system of land classification. The component parts of a well number are the township number, range number, section number, and two or three lowercase letters that indicate respectively the quarter section, quarter-quarter section, and, if there are three, the quarter-quarter-quarter section in which the well is located. The lowercase letters are assigned to the quarter divisions in a counterclockwise direction, beginning in the northeast quarter of each section or subdivision. For example, well 6-1-2baa (Fig. 2) is in the NE¼ NE¼ NW¼ sec. 2, T. 6 S., R. 1 E. If there are two or more wells in the same quarter-quarter-quarter section they are numbered serially according to the order in which they were inventoried.

#### ACKNOWLEDGMENTS

Appreciation is expressed to the many residents of Clay County who supplied information and aided in the collection of field data. Special acknowledgment is due the officials of the cities and industries who provided information about their water supplies. Acknowledgment is made also of information supplied by George Cox, driller, and E. H. Erickerman, irrigation-equipment supplier. F. Turner and H. Rhodes were very cooperative in permitting aquifer tests using their wells. Judge Walter O. Curtis of Clay Center was helpful in supplying information about some of the older wells in the area.

The manuscript of this report has been reviewed by several members of the U. S. Geological Survey and the State Geological Survey of Kansas; Robert Smrha, Chief Engineer, and George S. Knapp, Engineer, Division of Water Resources, Kansas State Board of Agriculture; and Dwight Metzler, Chief Engineer, and Willard Hilton, Geologist, Division of Sanitation, Kansas State Board of Health.

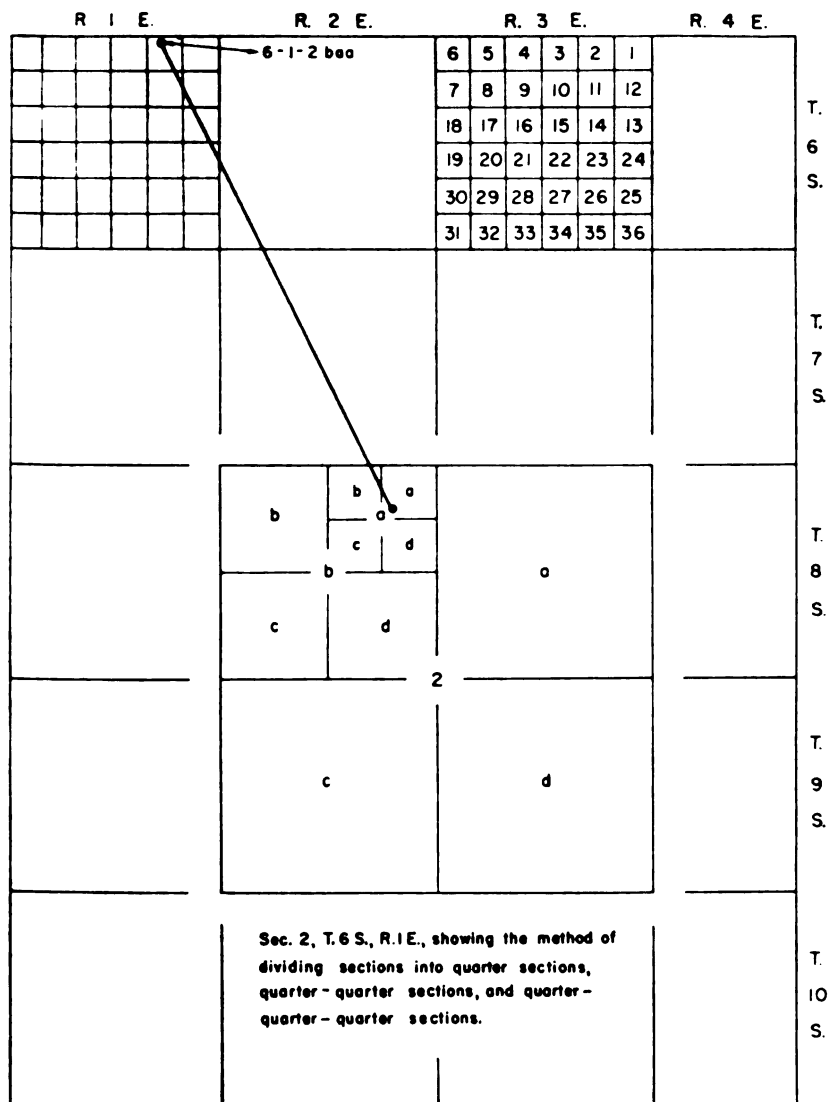


FIG. 2.—Map of Clay County illustrating well-numbering system used in this report.

## GEOGRAPHY

## TOPOGRAPHY AND DRAINAGE

Schoewe (1949) placed the western part of Clay County in the Smoky Hills division of the Dissected High Plains section of the Great Plains physiographic province and the eastern part of the county in the Flint Hills Upland division of the Osage Plains section of the Central Lowlands physiographic province. The border between the two divisions roughly coincides with the contact between the Cretaceous (Dakota Formation) and Permian (Wellington Formation) rocks through the county. The topography is varied. In the western part of the county, areas underlain with Dakota Formation typically are gently rolling surfaces dotted with numerous mounds or buttes capped by sandstone. East of the outcrop of the Dakota Formation the topography is influenced by the thick shales of the Wellington Formation, which produce a gently rolling surface dissected by streams. Local relief is relatively small. The topography in the easternmost part of the county is dominated by the bedrock of the Chase Group. Here gently rolling uplands contrast with sharp breaks into the valley areas, and the relief is considerably greater than that to the west in the outcrop area of the Wellington Formation. The broad, flat terraces in the valley of Republican River are important for agriculture and ground water.

The highest points in Clay County (about 1,500 feet above sea level) are the hills formed by sandstone of the Dakota Formation a short distance northeast of Oak Hill, and the lowest point (altitude about 1,100 feet) is in the Republican River valley in the southeastern part of the county.

Approximately two-thirds of Clay County lies in the drainage basin of Republican River. The river enters the county near the northwest corner, flows southeastward across the county, and leaves the county a short distance north of the southeast corner. An area of about 50 square miles in northeastern Clay County drains into Fancy Creek and thence into Big Blue River. In southwestern Clay County an area of about 120 square miles drains into Chapman Creek and thence into Smoky Hill River.

## CLIMATE

The U. S. Weather Bureau has maintained precipitation and temperature gages at Clay Center since 1902. The normal annual precipitation at Clay Center is 27.92 inches. The annual precipitation and the cumulative departure from normal for the period of record are shown graphically in Figure 3. The precipitation has ranged



from a low of 15.57 inches in 1934 to a high of 53.86 inches in 1951. About three-quarters of the precipitation falls during the 6-month period between April 1 and September 30, which is the period most favorable for growing crops. The normal monthly precipitation is shown graphically in Figure 4.

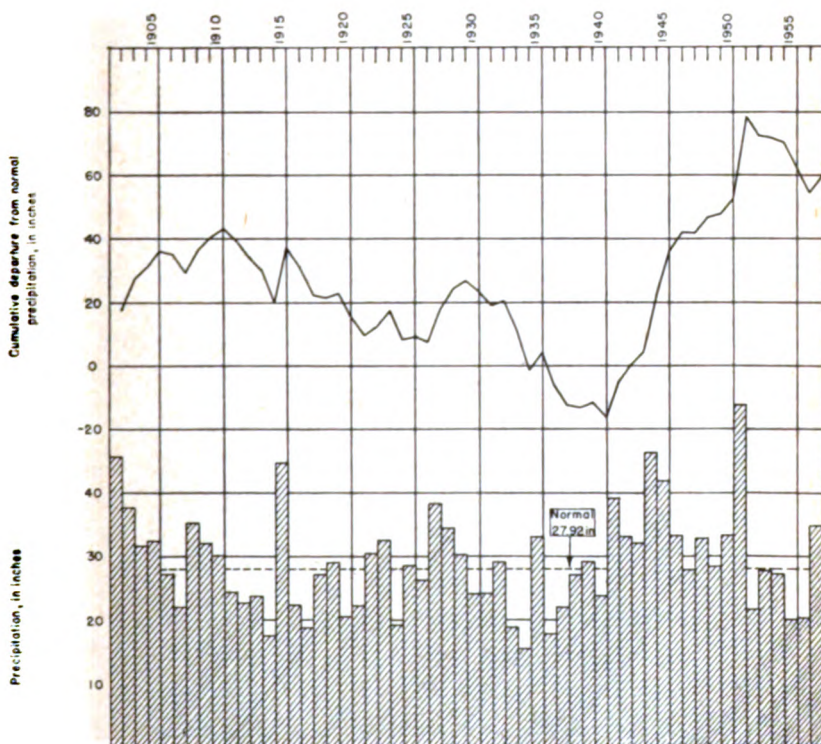


FIG. 3.—Annual precipitation and cumulative departure from normal precipitation at Clay Center.

The mean annual temperature at Clay Center is 55.1°F. The growing season in Clay County has ranged from 139 days to 213 days and averages 173 days. The earliest killing frost of record occurred on September 20, 1918; the latest, May 27, 1907.

#### POPULATION

According to the 1950 census, the population of Clay County was 11,697 and average density was 17.8 persons per square mile as compared with 23.1 per square mile for the entire state. The census records show that there has been a gradual decline in popu-

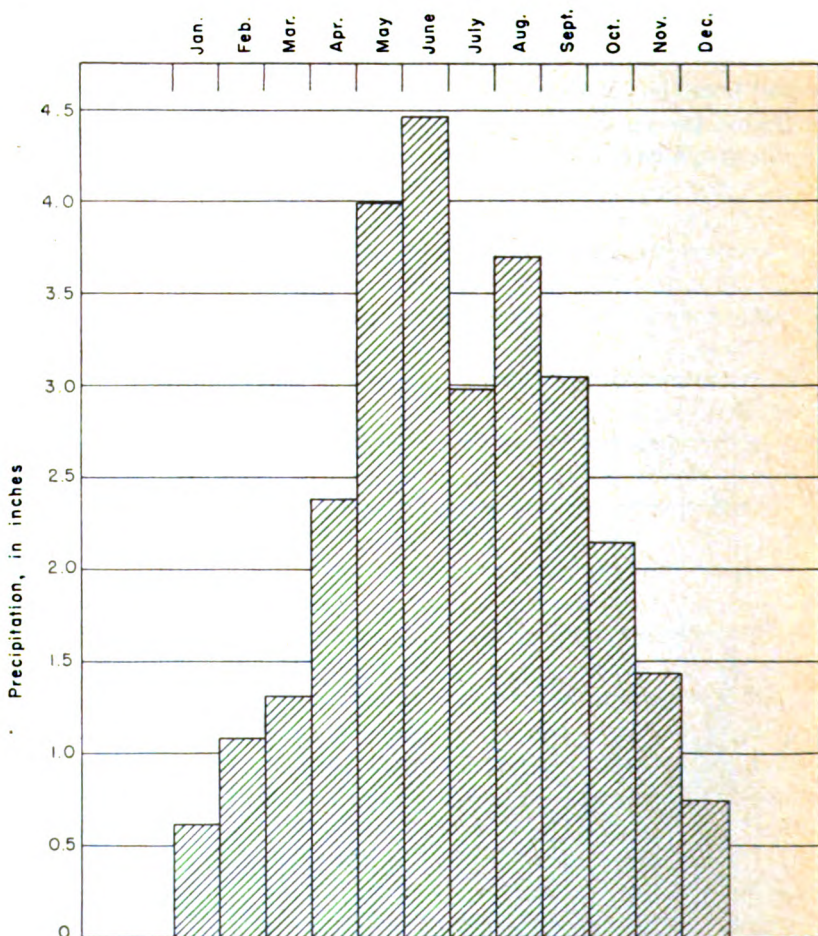


FIG. 4.—Normal monthly precipitation at Clay Center.

lation in the last 20 years, averaging about 140 persons a year. The urban population has remained about the same since the 1940 census, but the rural population has decreased. The principal cities and their population as shown by the 1950 census are as follows: Clay Center, 4,528; Clifton, 365; Green, 219; Longford, 178; Morganville, 278; Oak Hill, 92; Vining, 85; and Wakefield, 591.

#### TRANSPORTATION

Clay County has good transportation facilities. All but one of the cities are served by one or more railroads. Broughton, Clay Center, Morganville, Clifton, and Vining are served by a branch

line of the Chicago, Rock Island and Pacific Railroad Company. Longford and Oak Hill are served by a branch line of the Atchison, Topeka and Santa Fe Railroad Company. Wakefield, Broughton, Clay Center, Idana, and Browndale are served by a branch line of the Union Pacific Railroad. The city of Green was formerly served by another branch line of the Union Pacific, but this line has been abandoned.

Clay County is served by a good state and national highway system. U. S. Highway 24 crosses the county from east to west through Clay Center. Kansas Highway 15 crosses the county from north to south, and Kansas Highway 9 crosses the northwestern part of the county from Kansas Highway 15 west through Clifton. Kansas Highway 82 crosses the southeastern part of the county from Kansas Highway 15 east through Wakefield. All state and federal highways are hard surfaced, as are many of the county highways. Most of the township roads are graded and many of them are all-weather roads.

#### AGRICULTURE

Agriculture is the principal occupation in Clay County. About 85 percent of the land area in the county is used for agriculture, about one-third pasture and two-thirds cultivated. Wheat is the principal crop and is planted on about half the cultivated land.

The principal crops and the acres harvested in 1955 are as follows: Wheat, 94,000 acres; corn, 22,000 acres; alfalfa, 38,500 acres; sorghums, 21,700 acres; oats, 17,200 acres; and wild hay, 8,500 acres.

Ranking equally in value with grain and hay in the county is livestock products. In order of value these animal products are cattle, poultry and eggs, dairy products, and hogs. The value of livestock, poultry, milk, and eggs in 1955 was about \$5,267,000. that of all grains and hay harvested was about \$5,225,000 in 1955.

#### MINERAL RESOURCES

##### Construction Materials

Geologic materials that would be useful in construction projects include the alluvial deposits in the major stream valleys, sandstones and clays of the Dakota Formation, and Permian limestones in the eastern part of the county. For discussion these materials are classified according to use.

**Concrete aggregate.**—Aggregate for concrete consists of fragments of hard, durable minerals or rocks of sand and gravel size.

The constituent particles should be free from adherent coatings or particles that would interfere with the bonding of the cement and the aggregate. An almost unlimited quantity of sand and gravel is available from the alluvial deposits in the Republican River valley. Crushed limestone aggregate can be produced in large quantities from the Permian limestones in the eastern part of the county. Material for the manufacture of lightweight aggregate is available from the Dakota Formation and from thin deposits of the Kiowa Shale.

*Road metal.*—Road-surfacing material is available in large quantities from the sand and gravel in the alluvial deposits of the Republican River valley. Sandstone and iron-cemented sandstone of the Dakota Formation can be crushed for road metal and are used extensively in the western part of the county. Crushed limestone from the Permian beds is used extensively in the eastern part of the county.

*Mineral filler.*—Silts from loess deposits of the Sanborn Group and from terrace deposits in the Republican River valley are available and are used in large quantities for mineral filler in road-surfacing material in the county.

*Structural stone.*—Structural stone is any hard dense rock that can be quarried and cut to the desired size and shape. Materials that meet these requirements are found in the Cresswell Limestone member of the Winfield Limestone and the Fort Riley Limestone member of the Barneston Limestone. These limestones are found in the eastern part of the county, and many buildings in the area have been constructed from materials taken from small local quarries.

### Agricultural Limestone

Limestone having a calcium carbonate equivalent of 80 percent or more and occurring in ledges sufficiently thick to allow economical quarrying is regarded as a potential source for agricultural limestone. In Clay County most of the limestones, especially the Cresswell Limestone member of the Winfield Limestone and the Fort Riley Limestone member of the Barneston Limestone, meet this requirement. Some zones in many of the shales contain enough calcium carbonate to be used for agricultural limestone.

### Oil

Oil was discovered in the Wakefield pool in Clay County in 1928. The producing zone was the "Chat" at the top of the Mississippian rocks at a depth of 1,774 feet. After about 2 years the well was abandoned, but in 1951, production was resumed in this pool, and

the Wakefield Northeast pool was discovered. In 1952, one well was added to each pool. No production figures are available for Clay County. Of 25 oil tests drilled in the county, 5 have produced some oil.

### Gypsum

Gypsum is not produced commercially in Clay County, although there is a deposit in the NW¼ SW¼ sec. 19, T. 6 S., R. 4 E. Its areal extent is not known, but the geology and topography are such that the gypsum may extend over a considerable area. Unusually high sulfate content of water samples in the area probably indicates the presence of gypsum, though possibly not in commercial quantity. Test hole 6-4-19cb penetrated 13 feet of gypsum, including one seam of clean gypsum 8 feet thick. This deposit rests on the Herington Limestone member of the Nolans Limestone.

### Ceramic Raw Materials

By NORMAN PLUMMER

Although there is no ceramic industry in Clay County at present, there is available an abundance of clay and shale suitable for use in the manufacture of structural brick and tile, fire brick, and pottery. The most important ceramic clay deposits are in the Dakota Formation, which is exposed in the western and northern parts of the county. Many of the clay deposits in the Dakota Formation fire to light colors ranging from ivory to buff. Most such clays are refractory and could be used for making Low Duty and Intermediate Duty fire brick as well as face brick and pottery. Other clays of the Dakota Formation fire to darker colors ranging from dark buff to deep red (Plummer and Romary, 1947).

Most of the Pleistocene loess deposits of the county are suitable for use in the manufacture of common brick, or as a flux for mixing with the more refractory clays. Such blends are especially suitable for the manufacture of sewer pipe (Frye, Plummer, Runnels, and Hladik, 1949).

Permian shale was at one time used in the manufacture of brick at a plant a short distance southeast of Clay Center. Although acceptable brick can be made from this material, it would be considered inferior in the light of modern standards of brickmaking, and because high-quality raw materials are available it probably would not be used.

The Kiowa Shale of Cretaceous Age, which underlies the Dakota Formation, is an excellent "bloating" shale from which a good grade of lightweight concrete aggregate could be produced.



TABLE 1.—Generalized section of outcropping geologic rock units in Clay County

System	Series	Stage	Group	Formation	Member	Thickness (feet)	Physical character	Water supply
Quaternary	Pleistocene	Recent		Dune sand		0-35	Fine to medium quartz sand, and some silt.	Above the water table, and does not yield water to wells in Clay County.
				Alluvium		0-70	Stream-deposited clay, silt, sand and gravel. Generally graded, the coarser materials at the base.	Yields large quantities of water to wells in Clay County.
				Peoria		0-20	Wisconsinan terrace deposits and the Crete formation consist of stream-deposited beds of silt, clay, sand, and gravel. Loveland and Peoria formations consist of massive eolian deposits	Wisconsinan terrace deposits yield large quantities of water in Republican River valley and smaller amounts along tributary streams. Silt units yield little or no water to wells. Crete formation yields small to moderate quantities of water to wells in Clay County.
		Wisconsinan	Sanborn	Wisconsinan terrace deposits		0-70		
		Illinoian		Loveland		0-25		
				Crete		0-25		
		Kansan	Meade	Sappa		0-5	Gray clay and silt.	Does not yield water to wells in Clay County.
Cretaceous	Gulfian			Grand Island		0-10	Locally derived gravel.	Yields moderate amounts of water to wells in Clay County.
				Dakota Formation	Jansen Clay Terra Cotta Clay	0-165	Varicolored silty and sandy shale and massive sandstone beds.	Yields moderate amounts of water to wells in Clay County.
	Comanchean			Kiowa Shale		0-50	Dark fissile shale containing a few thin streaks of sand and silt.	Does not yield water to wells in Clay County.

Leonardian					0-250	Chiefly gray shale; some red and green shale in lower part. Contains discontinuous beds of gypsum and impure limestone.	May yield small quantities of somewhat mineralized water to wells in Clay County.
Permian							
Wolfcampian							

**GEOLOGY****SUMMARY OF STRATIGRAPHY \***

The areal geology of Clay County is shown on Plate 1. The rocks cropping out in the county are of sedimentary origin. The oldest rock exposed at the surface is the Barneston Limestone of the Chase Group, Wolfcampian Series, Permian System. It is exposed in the valley wall of Republican River in the vicinity of Wakefield. Successively younger Permian rocks are exposed west of the outcrop of the Barneston Limestone. The Wellington Formation, the youngest Permian formation in Clay County, is exposed in a wide belt extending across the county from north to south.

The Kiowa Shale is known to overlie the Wellington Formation in southwestern Clay County, but it is so poorly exposed that it is mapped with the Dakota. The Dakota Formation, the youngest Cretaceous rock unit in the county, crops out over a large part of western and northern Clay County.

Much of the upland area is blanketed by eolian silt or loess of Pleistocene age. Extensive Pleistocene alluvial deposits occur in the valleys.

A generalized section of the outcropping rock units of Clay County is given in Table 1. More detailed descriptions of these units are given in the section on rock units and their water-bearing characteristics.

**PRE-CENOZOIC GEOLOGIC HISTORY**

Although exposed rocks in Clay County total only a few hundred feet in thickness, a great deal is known about the much thicker sequence of deeply buried rocks through the interpretation of deep tests for oil and gas. The geologic history during the Paleozoic Era, as it is discussed here, is based chiefly on reports by Jewett (1949) and by Lee, Leatherrock, and Botinelly (1948).

**Paleozoic Era**

Clay County, like the rest of Kansas, is underlain by a basement complex of Precambrian crystalline rocks. The area that is now Clay County was invaded by the sea during Cambrian time, and remained an area of marine deposition during most of the Paleozoic Era. Rocks representing each of the systems of the Paleozoic Era are present, but leveling by erosion of certain beds indicates that the area was not always stable and was elevated above sea level

---

\* The stratigraphic classification used in this report is that of the State Geological Survey of Kansas and does not necessarily follow the nomenclature of the U. S. Geological Survey.

from time to time. Clay County is in the central part of the early Paleozoic North Kansas Basin and on the eastern flank of the late Paleozoic Salina Basin. Sedimentary rocks present under Clay County total about 3,000 feet in thickness.

### Mesozoic Era

The Paleozoic Era was brought to a close by uplifting of the entire area by the end of Permian time. The area was above sea level and subjected to erosion throughout all of Triassic and Jurassic time. Erosion continued through Early Cretaceous time until the deposition of the Kiowa Shale during a brief invasion by the sea. As the sea retreated from the area, the Dakota Formation was deposited in shallow fresh water. The sea again invaded the area and marine deposition was resumed.

At the end of the Cretaceous Period an area far to the west was uplifted, forming the Rocky Mountains. The Mississippi Valley area also was uplifted at about the same time, resulting in a north-west regional dip of Cretaceous and older rocks in eastern and central Kansas.

### CENOZOIC GEOLOGIC HISTORY

#### Tertiary Period

After the withdrawal of the Cretaceous sea and the tilting of Cretaceous and older rocks, there was a long period of erosion. The Cretaceous rocks overlying the Dakota Formation were eroded from the area that is now Clay County. Late in the Tertiary Period (Pliocene Epoch) the area to the west of Clay County was receiving deposits of sand and gravel from the eroding Rocky Mountains. These sand and gravel deposits, the Ogallala Formation, may not have reached as far east as Clay County, but they are found in several scattered areas a few miles west of Clay County.

#### Quaternary Period—Pleistocene Epoch

The major events of the Pleistocene Epoch in this area were the establishment of new drainage lines and downcutting by existing streams, aggradation of the major streams, and the deposition of loess. The relation of the Pleistocene deposits is shown in Plate 3.

At the beginning of the Pleistocene Epoch, Clay County probably was drained by a system of small streams, none of whose headwaters were very far from the county. Climatic changes associated with the advance of the glacial ice fronts during the Pleistocene Epoch resulted in increased streamflow and downcutting by streams. There was little or no deposition along streams in Clay County during the

first glacial stage, the Nebraskan. The second glacial stage, the Kansan, continued much as the Nebraskan stage had been. In early Illinoian time, the ancestral Republican River became blocked by ice or choked by sediments. The ancestral Republican River followed approximately the course of the present Republican River from its headwaters to the city of Republic in Republic County. From this point the ancestral river flowed northeastward into Nebraska (Lohman, in Fishel, 1948). After the damming of the ancestral Republican River in early Illinoian time, the impounded waters spilled over the lowest part of a divide between Republic and Scandia in Republic County, and the present course of Republican River was established from Republic to Junction City. Republican River and several smaller streams in Clay County have alternated since late Kansan time between periods of deposition and periods of downcutting, so that the valleys now contain terrace and alluvial deposits of Kansan, Illinoian, Wisconsinan, and Recent age.

During Recent time, sand has been carried from the flood plain of Republican River by the prevailing westerly winds and has been deposited in several places as sand dunes on the alluvium and Wisconsinan terraces.

## GROUND WATER

### PRINCIPLES OF OCCURRENCE

The rocks and surficial deposits that form the crust of the earth are, in general, not solid throughout, but contain many open spaces, called voids or interstices, and it is in these spaces that water is found below the surface of the earth and from which it is recovered, in part, through springs and wells. There are many types of rocks and they differ greatly in the number, size, and arrangement of their interstices and therefore in their water-bearing properties. The occurrence of ground water in any region, therefore, is determined by the geology of that region.

The interstices of rocks range in size from pores of microscopic dimensions to openings several inches or feet in width. These interstices can be divided into two classes, primary interstices and secondary interstices. The primary or original interstices were formed during the formation of the rocks. Secondary interstices were developed by the different processes that affected the rocks after deposition. In Clay County all the water-bearing rocks are sedimentary, and the openings that hold the water are either open pore spaces between the grains of rock (primary interstices) or joints and open bedding planes, which have resulted from deforma-



tion of the rocks, and openings caused by solution of the rocks. These are secondary interstices.

The amount of water that can be stored in any rock depends upon the porosity of that rock. Porosity is expressed quantitatively as the percentage of the total volume of the rock that is occupied by interstices. When all the interstices in a rock are filled with water the rock is said to be saturated. The amount of water that a saturated rock will yield to the force of gravity is known as the specific yield. The amount of water that a rock can hold is determined by its porosity, but the rate at which it will yield water to wells is determined by its permeability. The permeability of a rock is its ability to transmit water under hydraulic gradient and is measured by the rate at which the rock will transmit water through a given cross section under a given loss of head per unit of distance. Some beds of clay or shale may have a high porosity, but because the interstices are small and poorly connected, they transmit little or no water, and the rock may be regarded as virtually impervious. Rocks differ greatly in their degree of permeability, according to the number, size, and interconnection of their interstices.

#### SOURCE

Ground water is the part of the water below the surface of the earth that supplies wells and springs. In Clay County, ground water is derived entirely from precipitation, in the form of rain or snow, that falls directly on the county or on nearby areas. Part of the precipitation that falls as rain or snow is carried away by surface runoff and is discharged by streams, a part of it may evaporate, and a part may be absorbed by vegetation and transpired into the atmosphere. The part that escapes runoff, evaporation, and transpiration percolates slowly downward through the soil and underlying strata until it reaches the water table, where it joins the body of ground water in the zone of saturation. After reaching the ground-water body the water percolates slowly through the rocks in directions determined by the geology, topography, and geologic structure until it is discharged through wells and springs or by evaporation and transpiration in areas where the water table is shallow.

#### ARTESIAN CONDITIONS

Artesian conditions may exist where a water-bearing bed is overlain by a relatively impermeable bed that dips from its outcrop area toward the discharge area. Water entering the water-bearing bed in the outcrop area percolates downward to the water table and moves downdip beneath the confining bed. The weight of the

water at higher levels in the confined bed creates a hydrostatic pressure in the water reservoir. When the confining bed is penetrated the water will rise in the drill hole to a level equal to the hydrostatic head of the aquifer at the point of discharge. If the pressure in the aquifer is sufficient to lift the column of water above the top of the aquifer, artesian conditions exist. If the pressure in the aquifer is sufficient to lift the water above the land surface, the well will flow naturally. Such a well is called a flowing artesian well. Well 8-4-21ac flowed when drilled, but as the flow continued only a few days, a pump was installed. A flowing well was observed a few hundred yards west of the Clay County line, in the NE $\frac{1}{4}$  sec. 13, T. 8 S., R. 1 W. Geologic and topographic conditions indicate that similar flowing wells could be drilled in an adjacent area in Clay County.

Although only one flowing well is known to have existed in the county, it is probable that artesian conditions exist locally over much of the county. In western Clay County the Dakota Formation contains lenticular sandstone bodies semiconfined beneath clay and shale, and much of the water is probably under some hydrostatic pressure. In eastern Clay County the rocks are a sequence of limestones and relatively impermeable shales. The limestones are in general the best aquifers, and local structures create hydrostatic head within the aquifers; although wells may not flow at the surface, in many of them the water rises above the aquifer.

#### THE WATER TABLE AND MOVEMENT OF GROUND WATER

The configuration and gradient of the water table and the direction of ground-water movement generally can be shown by constructing a water-table contour map. In Clay County, however, the water table is not everywhere continuous, so the water-table contours shown on Plate 2 cover only part of the areas discussed below. Clay County can be divided into three general areas on the basis of the occurrence and movement of ground water. The largest of these areas is that underlain by rocks of Permian age; it includes roughly the area east of a north-south line passing through the center of Range 2 East (Pl. 1). Although the largest, this area is probably the least important as a source of ground water, because it is underlain chiefly by shale. Water is derived principally from limestones but occurs also in appreciable quantity in solution channels in gypsum deposits in the lower shales of the Wellington Formation. The regional dip in this area is westward, and the water moves downdip from the recharge area that lies to the east.

The second largest ground-water area is that underlain by the Dakota Formation (Pl. 1). In this area water is obtained from sandstones in the lower part of the Dakota Formation. Water-table contours were drawn over a part of this area (Pl. 2), but in the areas where the Dakota Formation is thin it was not feasible to construct contours. Also, in many areas the water levels in the shallow wells did not fit the contour pattern of the water levels in deeper wells. The shallow water seemed to occupy a perched or semiperched position in relation to the rest of the Dakota Formation, and for this reason the shallow water levels were not used in constructing the water-table contours. The movement of ground water in this area is generally eastward toward the valley of Republican River.

The third and most important ground-water area in the county is the Republican River valley. Water is obtained from unconsolidated alluvial deposits, and large supplies are available for irrigation. The Republican River valley can be divided into two areas. One area is that part of the valley above Clay Center, where the Nolans Limestone crops out in the valley walls, and the second area is that part of the valley below the outcrop of the Nolans Limestone. In the upper area the valley is broad and flat and the contours cross the valley nearly at right angles to the river and valley walls, indicating that the river is neither gaining water from the ground-water reservoir nor losing water to it. The portion of the valley below the Nolans Limestone outcrop is narrower, and the water-table contours intersect the river at sharp angles, indicating that the river is draining the ground-water reservoir in this area.

#### RECHARGE

The addition of water to the zone of saturation is known as ground-water recharge. Ground-water recharge in Clay County occurs by infiltration from precipitation within the county, by percolation from influent streams, and by subsurface inflow from adjacent areas.

#### Recharge from Precipitation

The areas in Clay County that are most favorable to ground-water recharge are the small dune tracts near Clifton and Wakefield, where poor drainage and permeable soils tend to reduce runoff and induce infiltration. Next in importance is the valley area, which is relatively flat and is underlain by very permeable materials. Much water enters the ground-water reservoir in the outcrop area

of the Dakota Formation where permeable sandstones are at or near the surface, although the steep slopes of this area tend to encourage runoff.

#### Percolation from Outside the Area

Most of the recharge in the area underlain by the Permian rocks necessarily penetrates through the more porous limestone beds in their outcrop areas and moves downdip to places where it is discharged. East of Clay County the lower part of the Barneston Limestone is cherty and fractured, and this area is probably the most important recharge area contributing water to the Permian rocks in Clay County.

Much water moves across the west county line of Clay County, through the Dakota Formation (Pl. 2). This water moves in a generally eastward direction to be discharged by seeps and springs and directly into the Republican River valley.

#### Seepage from Streams and Ponds

Much water is stored in ponds in Clay County. A large part of this water is lost through evaporation and transpiration and a part is used by livestock. The remainder seeps into the ground and becomes ground water. Under normal conditions the streams in Clay County contribute but little water to the ground-water reservoir, but when the stream stage is high a part of the water enters the stream bank as "bank storage". This process may become an important source of recharge in the future if large-scale development of irrigation in the valley area lowers the water table in these deposits and permits infiltration from the streams.

#### DISCHARGE

Ground water is discharged in Clay County by evaporation and transpiration, by seeps and springs, by wells, and by percolation to areas outside the county.

#### Discharge by Evaporation and Transpiration

In the areas in Clay County where the water table is only a few feet below the surface, water may be evaporated from storage. This is especially true in the valley of Republican River and to a lesser extent along the steeper slopes of the upland area where the water table is relatively near the surface and where seeps and springs occur. Transpiration accounts for much discharge in areas where the water table can be reached by the roots of plants.

### Discharge by Seeps and Springs

The water-table contours (Pl. 2) indicate that ground water in the outcrop area of the Dakota Formation moves toward Republican River or its tributaries. Many springs and seeps occur along the valley walls and steep slopes adjacent to tributary streams, and a considerable quantity of water is discharged from storage by this means. Springs occur along the outcrop of the Permian limestones in eastern Clay County where structural conditions are favorable. This water has moved down dip from the recharge area farther east and is discharged in considerable quantity.

### Discharge by Wells

Although large quantities of water are discharged through wells in Clay County, it is probable that the discharge of water by wells is small in comparison with discharge by other means. With increased development of irrigation, discharge by wells will become a more important factor.

## RECOVERY

### Principles of Recovery

When water is standing in a well the head of the water in the aquifer outside the well is in equilibrium with that in the well. When water is withdrawn from a well a difference in head is created between the water inside the well and the water outside the well for some distance from the well. The water table in the vicinity of the well develops a cone of influence (Fig. 5), which is deepest at the wall of the well and extends some distance around the well. An increase in the pumping rate of the well produces a greater drawdown.

The specific capacity of a well is the rate of yield per unit of drawdown and is generally given in gallons a minute per foot of drawdown. Specific capacity is generally determined after the well has been pumped for a period long enough to stabilize the drawdown.

The character of the water-bearing material and the type of construction control the yield, drawdown, and specific capacity of a well. If the water-bearing material is coarse and well sorted it will readily yield large quantities of water to wells and have a minimum drawdown. If on the other hand the material is fine and poorly sorted, it will offer much resistance to the movement of water and



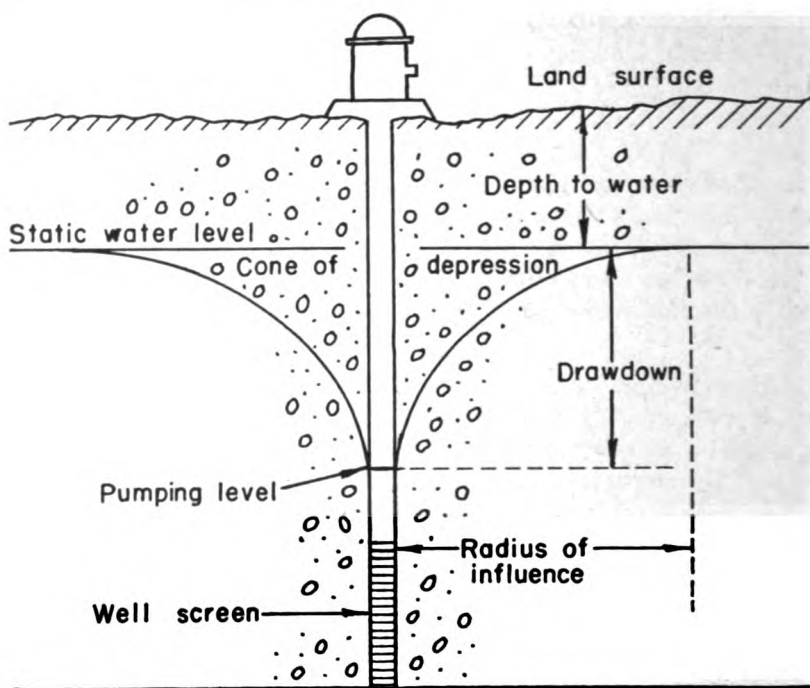


FIG. 5.—Diagrammatic section of well that is being pumped, showing draw-down, cone of depression, and radius of influence.

thereby yield less water and have a greater drawdown. All other things being equal, the drawdown of a well varies inversely with the permeability of the water-bearing material.

### Types of Wells

Several different types of wells are used in Clay County for the recovery of ground water. Wells generally are classed according to the method of construction. The particular type of well used at any location depends on the geology of the area, the depth to water and thickness of the saturated material at the location, and the use for which the well is constructed.

**Dug wells.**—Dug wells are of large diameter, generally constructed with pick and shovel or other hand tools, and walled with stone, tile, or concrete. Such wells generally are constructed in areas where large supplies of ground water are not available, and the large hole is used as a storage reservoir, which provides water during periods of pumping and slowly fills when the pump is not running.

**Driven wells.**—Driven wells are constructed by driving a pipe, generally 1½ to 2 inches in diameter and equipped with a screen, to a point below the water table. Such wells are pumped with some type of shallow-well pump. Most driven wells are in valley areas, for they are limited to areas where the water table is not much below 20 feet and where the deposits are unconsolidated. This type of well also is generally used when only small supplies of water are required.

**Drilled wells.**—Drilled wells are constructed by use of power-driven equipment to operate a percussion or rotary drill rig. This is the most common type of well in Clay County and is found in all types of material and in all localities. The depth of drilled wells is determined by the depth to the water table and the use for which the well is constructed. The use in turn may be limited by the quantity of water available. The diameter of drilled wells is generally dependent upon the use and desired quantity of water. Industrial, irrigation, and municipal wells require larger quantities of water and larger pumps and therefore require large-diameter holes to accommodate these pumps.

#### UTILIZATION OF WATER

Ground water in Clay County is used chiefly for domestic, stock, and public supplies. Recent interest in irrigation in the valley areas in the county has caused an increase in the use of ground water for this purpose, and it is probable that there will be a considerable future increase. The quantity of water used for industrial purposes is small compared to that for other uses.

#### Domestic and Stock Supplies

Nearly all the domestic and stock supplies of water in rural areas and in small communities that do not have a public supply are obtained from privately owned wells. In the valley areas these supplies are obtained chiefly from drilled and driven wells. In the upland areas the water supplies are obtained from either dug or drilled wells. In several small areas underlain by shales of the Wellington Formation, there is a scarcity of wells and there are many abandoned farmsteads. A lack of dependable water supplies in these areas was a contributing factor in the abandoning of the farmsteads. In other areas the Wellington Formation yields water of good quality to wells.

#### Industrial Supplies

The quantity of water used for industrial purposes in Clay County is small in comparison with that for other uses. The Northern Natural Gas Company has four wells that yield water from terrace

deposits in the Republican River valley in the NW¼ sec. 1, T. 6 S., R. 1 E. The wells are 50 feet deep, are equipped with turbine pumps, and pump an average of 325,000 gallons of ground water a day for cooling. In Clay Center, Swift and Company uses water from a well (8-3-8bb1) for cooling. This well is about 65 feet deep, is equipped with a turbine pump having a capacity of 120 gpm, and is pumped at an average rate of about 170,000 gpd. Well 8-3-8bc is owned by the Clay Center Coca Cola Bottling Company. This well is equipped with a jet pump having a capacity of about 50 gpm. The water is softened and the iron is removed. The average daily use is about 1,500 gallons.

### Public Supplies

Seven cities in Clay County have public water supplies. These supplies are discussed in the following paragraphs.

*Clay Center.*—The Clay Center water supply is obtained from five wells drilled in the low terrace deposits in the Republican River valley. Three of these wells in Utility Park are 55 feet deep and the depth to water is about 22 feet. Well 8-3-8bb4 was tested for 8 hours at a rate of 850 gpm, and had a drawdown of 14 feet. Well 8-3-8bd in Dexter Park, which was drilled in the summer of 1954, yields water from terrace gravels. The well is 60 feet deep and the depth to water is about 29 feet. After the well was pumped 8 hours at a rate of 500 gpm, the drawdown was 4 feet. Well 8-3-8db, in the southeastern part of Clay Center, is a drilled well 58 feet deep and yields water from terrace gravels. In August 1954 the depth to water was 28 feet. All the wells are equipped with electric turbine pumps. The maximum capacity of the five wells is about 4 million gallons per day, and the average daily use is about 800,000 gallons. The water is chlorinated but receives no other treatment. The water is stored in an elevated steel tank having a capacity of 500,000 gallons. In addition to the five wells used for the public water supply, the city has four wells at the municipal power plant that provide water for cooling. These are drilled wells about 50 feet deep equipped with turbine pumps. The average daily pumpage from these wells is 1.7 million gallons.

*Clifton.*—The Clifton water supply is obtained from two wells (6-1-2bac1 and 6-1-2bac2) in the southwestern part of the city. The wells, which are equipped with turbine pumps, yield water from terrace deposits in the Republican River valley and are about 65 feet deep. The water level in August 1954 was about 30 feet. The drawdown in each of these wells is 7 feet at a pumping rate of 160 gpm. The maximum capacity of the two wells is about 360,000

gallons per day and the average daily use is 100,000 gallons. Hardness is reduced by pressure zeolite softeners and the water is chlorinated. A steel standpipe has a capacity of 90,000 gallons.

*Green.*—The Green municipal water supply is obtained from two wells (7-4-20ad and 7-4-21bc), which yield water from the Fort Riley Limestone member of the Barneston Limestone at depths of 170 and 190 feet respectively. The water is hard but receives no treatment. The capacity of the wells is about 30,000 gpd, and the average daily use is about 10,000 gallons. Water is pumped directly to an elevated concrete storage tank having a capacity of 60,000 gallons.

*Idana.*—The Idana water supply is obtained from one well (8-1-13ca) south of town in a creek valley. It yields water from terrace deposits along the edge of the valley. Average use at Idana is about 5,300 gpd. Storage capacity is 10,000 gallons in an underground steel tank.

*Longford.*—The Longford municipal water supply is obtained from two wells about half a mile west of the city. These wells (10-1-17dc1 and 10-1-17dc2) yield water from the Dakota Formation. The wells are 100 and 110 feet deep, respectively. The average daily pumpage is about 15,000 gallons. The water is chlorinated and delivered to the mains from an elevated concrete tank having a capacity of 60,000 gallons.

*Morganville.*—The Morganville water supply is obtained from two wells within the city limits. These wells (7-2-3cc and 7-2-4ddc) obtain water from terrace deposits in the Republican River valley. The wells are 53 and 57 feet deep, respectively, and are equipped with turbine pumps. Maximum daily yield is 160,000 gallons, and average daily pumpage is 30,000 gallons. The water is chlorinated and delivered to the mains from an elevated steel tank having a capacity of 50,000 gallons.

*Wakefield.*—The Wakefield water supply is obtained from two wells at the south edge of the city. These wells (10-4-5db1 and 10-4-5db2) obtain water from terrace deposits in the Republican River valley. The wells are 57 feet deep and are equipped with turbine pumps. The water levels in the wells were 34 feet below the surface in August 1954. After the wells are pumped for 24 hours at the rate of 100 gpm each, the drawdown is 2 feet. The yield of the wells as equipped is about 300,000 gpd, and average daily use is 80,000 gallons. The water is chlorinated and delivered to the mains from an elevated steel tank having a capacity of 30,000 gallons.

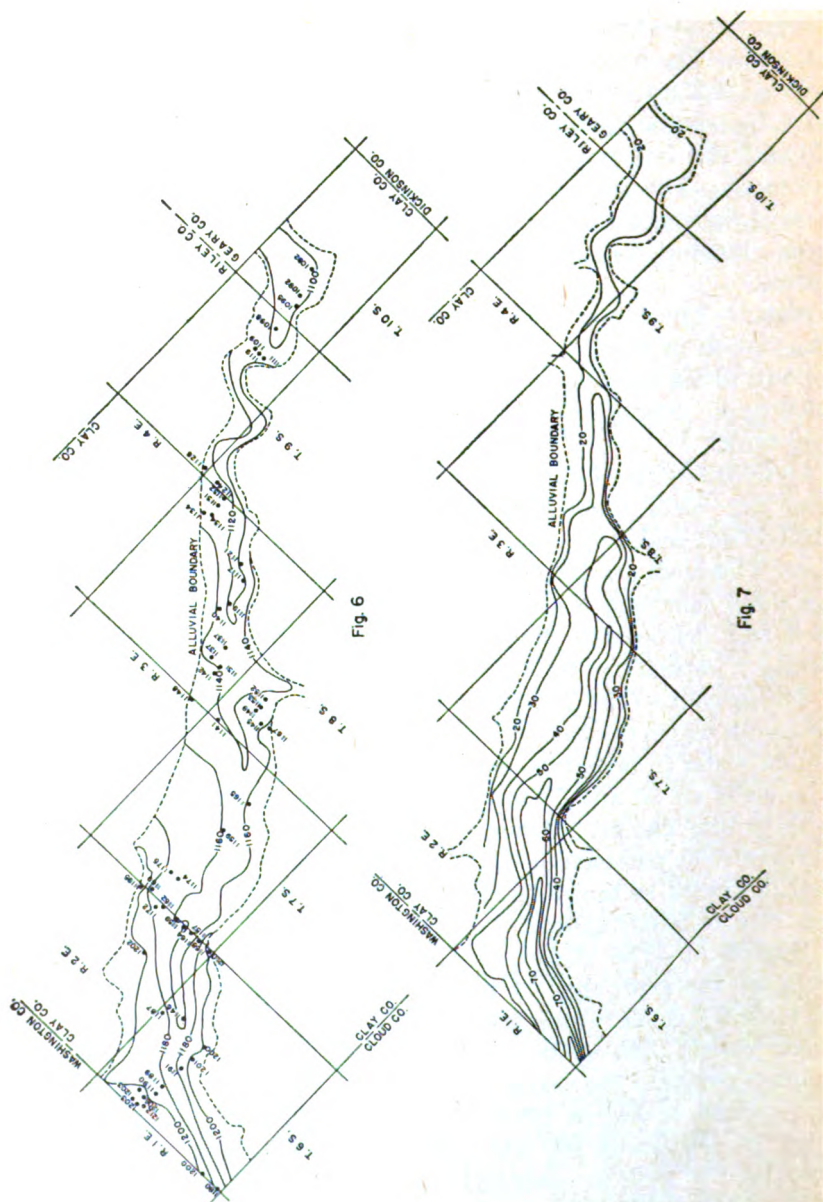


FIG. 6.—Configuration of bedrock surface in Republican River valley.  
FIG. 7.—Thickness of saturated material in Republican River valley.



## Irrigation Supplies

In the fall of 1954 six irrigation wells having a combined capacity of about 5,000 gpm were in operation in Clay County. Continued drought conditions during the growing season in 1955 intensified interest in irrigation, and by autumn 29 additional wells had been drilled, which had a combined capacity of about 21,000 gpm. In 1955 about 2,730 acre-feet of water was pumped for irrigation.

Four of the irrigation wells drilled in 1955 obtain water from the Barneston Limestone. The yields of these wells range from about 50 to 250 gpm. The other 25 wells obtain water from alluvial materials in the valley area. The yields of these wells range from 350 to 2,000 gpm.

Maps were prepared showing the configuration of the bedrock surface in the valley area (Fig. 6) and the water-table contours (Pl. 2). The water-table map was superposed over the bedrock map and a saturated-thickness map was prepared by connecting the points of equal thickness (Fig. 7). The bedrock contour map (Fig. 6) indicates that the pre-Pleistocene surface of the valley above Clay Center was a broad V-shaped valley in which the deeper part generally is near the center of the valley. Below Clay Center, where the limestones of Permian age cross the valley, the valley is also V shaped but is much narrower. The saturated-thickness map (Fig. 7) indicates that the thickest deposits of saturated material follow the deepest channels of the pre-Pleistocene surface shown in Figure 6, and the greatest thickness is in the northwest corner of the county, where the saturated materials are 80 feet thick. The thickness of these materials gradually decreases downstream to a point just west of Clay Center where the saturated material is only 40 feet thick, and below a point a short distance downstream from Clay Center the thickness of saturated materials is about 20 feet except in a very narrow channel cut in the pre-Pleistocene surface. The volume of saturated material in the valley area was determined from Figure 7, and by applying a specific yield of 20 percent the volume of water in storage was calculated. The volume of saturated material and volume of water in storage are given by townships in Table 2. Table 2 indicates that about 275,000 acre-feet of water is in storage west of the west line of Range 3 East and only about 45,000 acre-feet east of this line. The large amount of storage upstream from Clay Center in comparison with the small amount downstream is due to the great amount of alluvium upstream; the valley becomes narrower and shallower downstream because it is

TABLE 2.—*Volume of saturated water-bearing material in Republican River valley and volume of water in storage based on specific yield of 20 percent.*

Township	Acre-feet of saturated material	Acre-feet of water in storage
T. 6 S., R. 1 E.....	560,000	110,000
T. 6 S., R. 2 E.....	240,000	49,000
T. 7 S., R. 2 E.....	510,000	100,000
T. 7 S., R. 3 E.....	7,000	1,400
T. 8 S., R. 2 E.....	100,000	20,000
T. 8 S., R. 3 E.....	140,100	29,000
T. 9 S., R. 3 E.....	13,000	2,600
T. 9 S., R. 4 E.....	39,000	7,800
T. 10 S., R. 4 E.....	32,000	6,400
Total.....	1,600,000	320,000

cut in the more resistant Permian limestones that cross the valley downstream, whereas upstream the less resistant Wellington and Dakota Formations form the bedrock underlying the valley area. The amount of water in storage (320,000 acre-feet) is equal to the quantity of water that would be pumped in 60 to 65 years at the 1955 rate of withdrawal for industrial and municipal use, which is about 5,000 acre-feet per year. This does not take into consideration any recharge to the valley during that period. The water-table contours indicate that water moves into the valley area, and although no quantitative data are available a considerable quantity of water must be contributed to the valley area in this way. Surface water is contributed to the valley through local drainage and through Republican River. Recent completion of reservoirs on Republican River in Colorado and Nebraska will aid in maintaining a minimum flow in the river. There seems to be no immediate danger of a serious depletion of ground water in storage in the Republican Valley, but a continued increase in the irrigation development will cause a lowering of the water table in the area and may diminish the streamflow during periods of heavy pumping.

#### CHEMICAL CHARACTER OF WATER

The chemical character of the ground water in Clay County is indicated by the analyses of 33 samples (2 composite) of water from 35 wells and test holes distributed as uniformly as practicable within the area and among the principal water-bearing formations (Table 3). A graphic representation of the chemical analyses of water from representative wells in the county is shown in Figures 8 and 9.

The depth given in Table 3 for the samples of water from test holes is the depth from which the sample was pumped. For all other samples of water the depth indicated is the total depth of the well. The samples of water were analyzed by Howard A. Stoltenberg, chemist, in the Water and Sewage Laboratory of the Kansas State Board of Health.

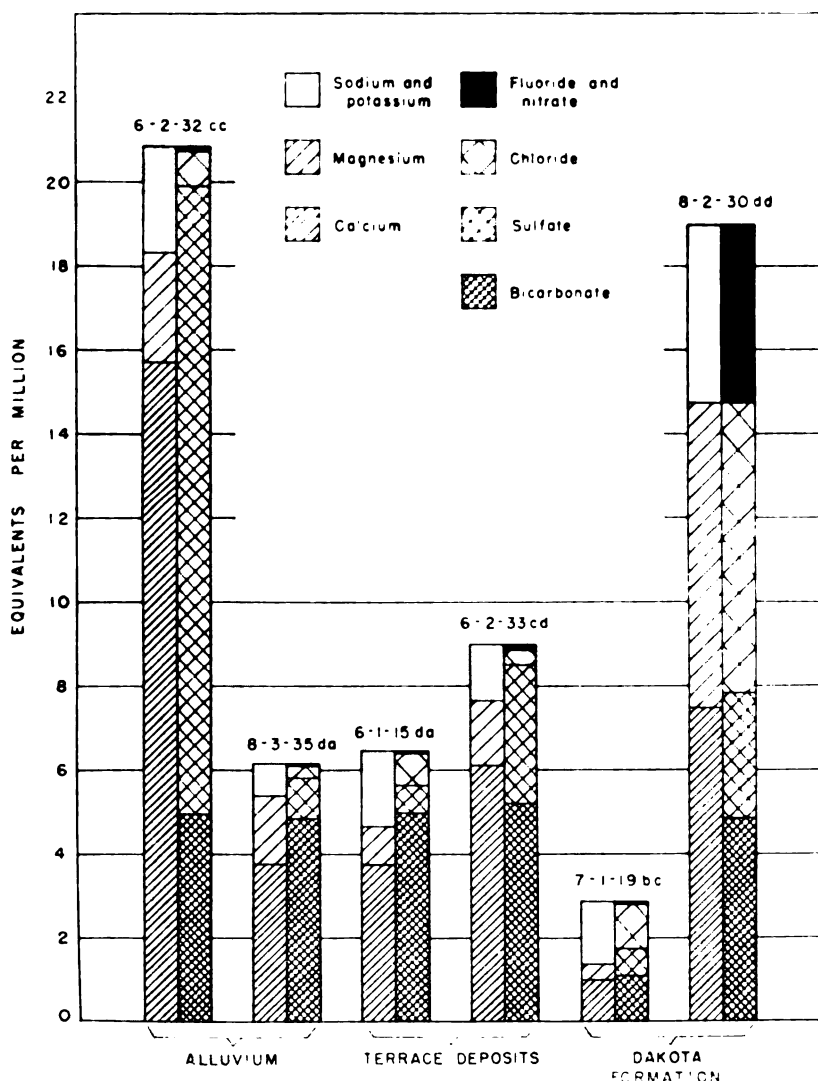


FIG. 8.—Graphic representation of chemical analyses of water from principal water-bearing formations in representative wells in Clay County.

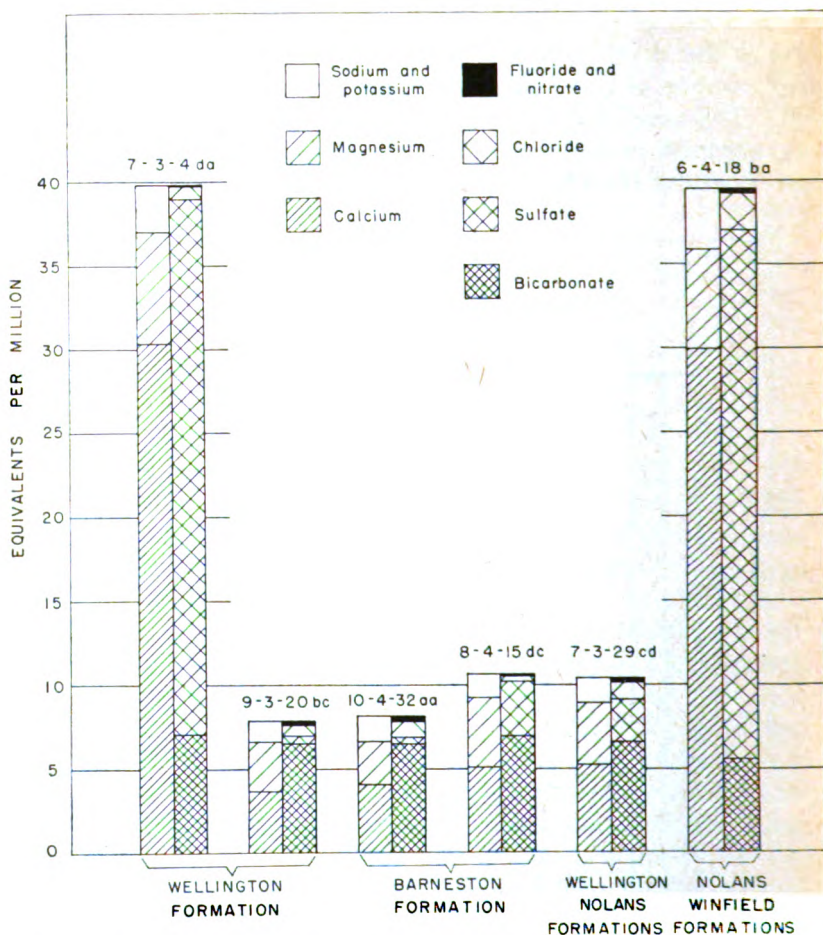


FIG. 9.—Graphic representation of chemical analyses of water from minor water-bearing formations in representative wells in Clay County.

### Chemical Constituents in Relation to Use

The following discussion of the chemical constituents of ground water has been adapted from publications of the State Geological Survey of Kansas. The analyses of samples of water collected in Clay County are given in Table 3.

**Dissolved solids.**—The residue left after a natural water has evaporated consists of rock materials, but may include some organic material and water of crystallization. Waters containing less than 500 parts per million of dissolved solids generally are satisfactory for domestic use, except for difficulties resulting from hardness and,

in some cases, excessive iron content or corrosiveness. Waters having more than 1,000 ppm are as a rule not satisfactory, for they are likely to contain enough of certain constituents to produce a noticeable taste or to make the water unsuitable in some other respect.

The concentration of dissolved solids was less than 500 ppm in 14 of the 33 samples of water collected in Clay County, ranged from 500 to 1,000 ppm in 14 samples, and was more than 1,000 ppm in 5 samples. The water sample having the lowest concentration of dissolved solids (58 ppm) was from a spring (9-2-30bb) in the Dakota Formation. The water sample having the highest concentration of dissolved solids (3,600 ppm) was from well 10-2-17cd1 in the Wisconsin terrace deposits. This sample had a very high concentration of calcium and sulfate ions.

**Hardness.**—The hardness of water, which is the property of water that generally receives the most attention, is most commonly recognized by its effects when soap is used with water. Hard water is objectionable because it forms with soap a sticky, insoluble curd difficult to remove from containers and fabrics, and because it requires much soap to form a lather. Hard water forms scale in boilers and pipes, which reduces efficiency of heat transfer and may even result in boiler failure. Calcium and magnesium cause most of the hardness of ordinary water, and hence also the greater part of the scale in steam boilers and in other vessels in which water is heated or evaporated.

In addition to total hardness the table of analyses shows carbonate hardness and noncarbonate hardness. The carbonate hardness is that due to the presence of calcium and magnesium bicarbonates. It may be almost completely removed by boiling. This type of hardness has been called temporary hardness. The noncarbonate hardness is due to the presence of the sulfates or chlorides of calcium and magnesium and cannot be removed by boiling, and for this reason has sometimes been called permanent hardness. With reference to use with soap there is no difference between the carbonate and noncarbonate hardness.

Water having a hardness of less than 50 ppm is generally considered soft, and under ordinary circumstances treatment for removal of hardness is not necessary. Hardness between 50 and 150 ppm does not seriously interfere with the use of water for most purposes, but it does increase somewhat the consumption of soap, and its removal by a softening process is profitable for laundries and other industries using large quantities of soap. Hardness of more than 150 ppm can be noticed by most users, and if the hardness is 200

TABLE 3.—*Analyses of water from typical wells, springs, and test holes in Clay County*  
Analyzed by H. A. Stoltenberg. Dissolved constituents given in parts per million \*

Location	Depth, feet	Geologic source	Date of collection	Temper- ature (°F)	Dis- solved solids	Silica (SiO <sub>2</sub> )	Iron (Fe)	Cal- cium (Ca)	Mag- nesium (Mg)	Sodium and potas- sium (Na+K)	Bicar- bonate (HCO <sub>3</sub> )	Sulfate (SO <sub>4</sub> )	Chlo- ride (Cl)	Fluo- ride (F)	Ni- trate (NO <sub>3</sub> )	Hardness as CaCO <sub>3</sub>		
																Total	Car- bonate	Noncar- bonate
6-1-2lac1.....	65	Terrace deposits.....	7-20-45	58	345	24	0.61	70	12	37	290	40	16	0.3	1.5	224	224	0
6-1-2cc.....	56-61	Alluvium.....	6-17-54	58	373	28	3.8	88	13	29	345	26	18	0.3	0.9	273	273	0
6-1-15da.....	56-61	Terrace deposits.....	6-18-54	57	367	28	0.88	75	11	42	303	33	28	0.3	0.8	232	232	0
6-2-3ad.....	59	Dakota Formation.....	10-26-54	56	571	14	18	100	17	78	261	54	121	0.3	58	320	214	106
6-2-32ccc.....	60-65	Alluvium.....	6-23-54	56	1,320	18	4.1	315	32	57	300	721	30	0.6	2.3	918	246	672
6-2-33cd.....	56-61	Terrace deposits.....	6-24-54	.....	525	23	1.2	122	19	30	317	160	13	0.4	1.7	332	260	132
6-4-18ba.....	77	Nolans and Winfield Limestones	10-26-54	56	2,530	10	11	601	71	83	349	1,510	77	0.8	1.5	1,790	286	1,500
6-4-33ad.....	103	Barneston Limestone.....	10-26-54	55	431	13	0.50	76	47	20	459	13	10	0.3	26	382	376	6
7-1-6bb.....	74-76	Dakota Formation.....	7- 8-54	.....	502	9.5	.....	89	27	53	337	134	20	0.4	3.3	333	276	57
7-1-15beb.....	65	do.....	6- 9-54	57	863	8.2	4.9	145	23	106	262	54	171	0.2	217	456	215	241
7-1-19be.....	50	do.....	3- 4-54	54	174	7.4	5.4	20	4.6	35	68	31	27	0.2	6.2	69	56	13
7-2-4dde.....	57	Terrace deposits.....	11-24-53	.....	514	.....	0.18	122	24	28	364	140	16	0.3	6.6	403	290	113
7-3-4da.....	Spring	Wellington Formation.....	3- 1-54	57	2,540	17	0.42	608	83	60	432	1,530	25	0.8	1.5	1,860	344	1,500
7-3-20cd.....	77	Wellington Formation and Nolans Ls.	10-26-54	55	574	18	0.10	107	44	34	407	121	34	0.4	16	448	334	114
7-4-20cd.....	190	Barneston Limestone.....	3- 2-54	.....	835	15	0.23	143	67	39	368	311	49	0.6	26	632	302	330
7-4-21be.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
7-4-32ce.....	105	Barneston Limestone.....	10-26-54	56	568	10	15	107	50	26	429	143	18	0.8	1.7	472	352	120



8-1-13ca.....	40	Terrace deposits.....	10-13-55	.....	880	32	0.77	160	35	44	261	246	79	0.3	71	543	214	329
8-2-30ld.....	.....	Dakota Formation.....	6-9-54	56	1,140	9.4	3.2	151	88	97	295	146	244	0.6	261	738	242	496
8-3-8db.....	58	Terrace deposits.....	1-31-48	.....	655	30	3.5	144	24	29	445	125	15	0.4	5.3	458	365	93
8-3-35da2.....	16-21	Alluvium.....	6-29-54	58	330	12	.....	75	20	18	294	47	11	0.4	1.1	269	241	28
8-4-15dc.....	118	Barneston Limestone.....	10-26-54	56	580	13	9.0	102	51	32	427	157	13	0.6	1.3	464	360	114
9-2-30db.....	Spring	Dakota Formation.....	10-27-54	57	58	11	0.23	7.4	1.8	7.6	29	4.9	7.0	0.2	3.6	26	24	2
9-3-1ec.....	93	Barneston Limestone.....	10-26-54	55	546	18	2.0	100	37	46	454	93	16	0.4	12	402	372	30
9-3-20bc.....	78	Wellington Formation.....	6-9-54	56	401	11	1.9	75	36	26	404	18	20	0.2	16	335	331	4
9-3-23cc.....	99	Barneston Limestone.....	10-26-54	56	407	20	1.5	84	38	16	456	9.1	10	0.2	4.4	366	366	0
9-4-21aa.....	144	do.....	10-26-54	55	371	16	0.26	76	23	32	383	14	14	0.2	6.6	284	284	0
9-4-32ade.....	31-36	Terrace deposits.....	7-1-54	57	278	22	.....	67	9.5	19	254	28	6.0	0.4	1.3	206	206	0
10-1-17de.....	100	Dakota Formation.....	5-16-44	.....	119	11	1.2	16	3.8	12	70	13	5.0	0.1	2.2	56	56	0
10-2-17ed.....	55	Terrace deposits.....	6-9-54	56	3,600	22	29	549	198	292	371	2,170	178	0.9	1.9	2,180	304	1,880
10-2-23bb.....	65	Nolan Limestone.....	6-9-54	57	476	9.4	1.5	73	31	64	387	46	54	0.2	8.4	310	310	0
10-3-13ba.....	107	Barneston Limestone.....	10-26-54	55	668	14	1.5	98	40	77	366	90	76	0.3	93	409	300	109
*10-4-5db1.....	57	Terrace deposits.....	8-11-54	.....	605	25	.04	109	28	40	371	56	43	0.2	62	387	304	83
*10-4-5db2.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
10-4-32aa.....	134	Barneston Limestone.....	10-26-54	56	427	16	1.7	84	30	34	398	16	36	0.2	15	333	326	7

a. One part per million is equivalent to one pound of substance per million pounds of water or 8.33 pounds per million gallons of water.

\* Composite sample from two wells.

ppm or more the water is commonly softened. Where municipal water supplies are softened, an attempt is generally made to reduce the hardness to about 80 to 100 ppm. Further softening of a public supply is deemed not worth the additional cost.

Of the 33 samples of water collected in Clay County only 3 samples had a hardness of less than 150 ppm, and these 3 samples were from the Dakota Formation. Six samples had a hardness of 150 to 300 ppm, and 24 samples had a hardness of more than 300 ppm. All but one of the samples collected from wells in Permian rocks had a hardness of more than 300 ppm.

*Iron.*—If the water contains much more than 0.3 ppm of iron, the excess may separate out and settle as a reddish sediment when exposed to air. Iron may be present in sufficient quantity to give a disagreeable taste or to stain cooking utensils; it may be removed by aeration and filtration, but some water requires additional treatment to remove the iron.

Water samples from the test holes in Clay County were pumped by the air-lift method, and the resulting aeration resulted in precipitation of much of the iron. These samples were not analyzed for iron. Only 6 of the 30 samples of water from Clay County that were analyzed for iron contained less than 0.3 ppm.

*Fluoride.*—The fluoride content of water used by children should be known, because fluoride in water has been shown to be associated with the dental defect known as mottled enamel. Mottled enamel may appear on the teeth of children who, during the formation of the permanent teeth, drink water containing excessive amounts of fluoride. According to standards promulgated by the U. S. Public Health Service (1946), water containing more than 1.5 ppm of fluoride should not be used by children. If water contains as much as 4 ppm of fluoride, 90 percent of the children habitually drinking it are likely to have mottled enamel. Concentrations of fluoride of about 1 to 1.5 ppm have been shown to be beneficial in reducing tooth decay, and fluoride is now being added to some municipal supplies to bring the concentration up to about 1 to 1.5 ppm. The water samples collected in Clay County had a fluoride content of less than 1 ppm.

*Chloride.*—Chloride is widely distributed in nature; it is an abundant constituent of sea water and oil-field brines and is dissolved from most rock materials. Chloride has little effect on the suitability of water for ordinary use unless there are enough chloride salts in solution to impart a salty taste or to cause the water to be corrosive. The removal of chloride from water is difficult and expensive.

Water containing chloride concentrations of less than 250 ppm is regarded as satisfactory for domestic uses. Concentrations of chloride salts giving a chloride content between 250 and 500 ppm may impart a slight salty taste, but the water may be used for drinking and for household uses if water of better quality is not available. Cattle have a fairly high tolerance for mineralized water. Although fresh water is preferable, it is reported that cattle can drink water having chloride content of 5,000 ppm.

All the samples of water from Clay County contained less than 250 ppm of chloride.

**Nitrate.**—The use of water containing an excessive amount of nitrate in the preparation of a baby's formula can cause cyanosis (blue baby), or oxygen starvation. Some authorities advocate that water containing more than 45 ppm of nitrate should not be used in formula preparation for infant feeding. Water containing 90 ppm of nitrate is generally considered dangerous to infants, and water containing 150 ppm may cause severe cyanosis. Cyanosis is not produced in adults and older children by the concentration of nitrate found in drinking water. Boiling of water containing excessive nitrate does not render it safe for use by infants; therefore, only water that is known to be free from excessive nitrate should be used for preparing baby formulas.

The nitrate content of the water from some wells is somewhat seasonal, being highest in the winter and lowest in the summer (Metzler and Stoltenberg, 1950). Of the 33 water samples for which analyses are given in Table 3, 27 contained less than 45 ppm of nitrate, 3 contained 45 to 90 ppm, 1 contained 90 to 150 ppm, and 2 contained more than 150 ppm of nitrate.

**Sulfate.**—Sulfate in ground water is derived principally from gypsum (calcium sulfate), and from the oxidation of pyrite (iron sulfide). Magnesium sulfate (Epsom salt) and sodium sulfate (Glauber's salt), if present in sufficient quantity, will impart a bitter taste to the water and may have a laxative effect upon persons who are not accustomed to drinking it.

Of 33 samples of water from Clay County that were analyzed for sulfate, 14 contained less than 50 ppm, 13 contained 51 to 200 ppm, and 6 contained more than 200 ppm.

#### Chemical Constituents in Relation to Irrigation

This discussion of the suitability of water for irrigation is adapted from Agriculture Handbook 60, U. S. Department of Agriculture (U. S. Salinity Laboratory Staff, 1954).

The development and maintenance of successful irrigation projects involve not only the supplying of irrigation water to the land, but also the control of the salinity and alkalinity of the soil. Irrigation practices, drainage conditions, and quality of irrigation water all are involved in salinity and alkali control. Soil that was originally nonsaline and nonalkali may become unproductive if excessive soluble salts or exchangeable sodium are allowed to accumulate because of improper irrigation and soil-management practices or inadequate drainage.

In areas of sufficient rainfall and ideal soil conditions the soluble salts originally present in the soil or added to the soil with water are carried downward by the water and ultimately reach the water table. This process of dissolving and transporting soluble salts by the downward movement of water through the soil is called leaching. If the amount of water applied to the soil is not in excess of the amount needed by plants, there will be no downward percolation of water below the root zone, and mineral matter will accumulate at that level. Likewise, impermeable soil zones near the surface can retard the downward movement of water, resulting in waterlogging of the soil and in deposition of salts. Unless drainage is adequate, attempts at leaching may not be successful, because leaching requires the free passage of water through and away from the root zone.

The characteristics of an irrigation water that seem to be most important in determining its quality are (1) total concentration of soluble salts; (2) relative proportion of sodium to total principal cations (magnesium, calcium, potassium, and sodium); (3) concentration of boron or other elements that may be toxic; and (4) under some conditions, the bicarbonate concentration as related to the concentration of calcium plus magnesium.

For diagnosis and classification of irrigation water, the total concentration of soluble salts can be adequately expressed in terms of electrical conductivity. Electrical conductivity is the measure of the ability of the inorganic salts in solution to conduct an electric current, and is usually expressed in terms of micromhos per centimeter at 25° C. The electrical conductivity can be determined accurately in the laboratory, or an approximation of the electrical conductivity may be obtained by multiplying the total equivalents per million of calcium, sodium, magnesium, and potassium by 100, or by dividing the total dissolved solids in parts per million by a factor, which in this area is about 0.64. Table 4 gives the factors for converting parts per million to equivalents per million. In general.

waters having an electrical conductivity less than 750 micromhos per centimeter are satisfactory for irrigation insofar as salt content is concerned, although salt-sensitive crops such as strawberries, green beans, and red clover may be adversely affected by irrigation water having an electrical conductivity in the range of 250 to 750 micromhos per centimeter. Waters in the range of 750 to 2,250 micromhos per centimeter are widely used, and satisfactory crop

TABLE 4.—Factors for converting parts per million of mineral constituents to equivalents per million.<sup>1</sup>

Cation	Conversion factor	Anion	Conversion factor
Ca <sup>++</sup> .....	0.0499	HCO <sub>3</sub> <sup>-</sup> .....	0.0164
Mg <sup>++</sup> .....	.0822	SO <sub>4</sub> <sup>-</sup> .....	.0208
Na <sup>+</sup> .....	.0435	Cl <sup>-</sup> .....	.0281
		NO <sub>3</sub> <sup>-</sup> .....	.0161
		F <sup>-</sup> .....	.0526

1. Equivalents per million equals parts per million multiplied by conversion factor. For example, 487 ppm of calcium  $\times$  0.0499 = 24.3 epm.

growth is obtained under good management and favorable drainage conditions, but saline conditions will develop if leaching and drainage are inadequate. Use of waters having a conductivity greater than 2,250 micromhos per centimeter is the exception, and very few instances can be cited where such waters have been used successfully.

In the past the relative proportion of sodium to other cations in irrigation water has been expressed simply as the percentage of sodium, generally called "percent sodium". According to the U. S. Department of Agriculture, however, the sodium-adsorption ratio (SAR), used to express the relative activity of sodium ions in exchange reactions with soil, is a much better measure of the suitability of water for irrigation. The sodium-adsorption ratio may be

determined by the formula 
$$SAR = \frac{Na^+}{\frac{\sqrt{Ca^{++} + Mg^{++}}}{2}}$$
 where the ionic

concentrations are expressed in equivalents per million. The sodium-adsorption ratio may be determined also by use of the nomogram shown in Figure 10. In using the nomogram to determine the sodium-adsorption ratio of a water, the concentration of sodium expressed in equivalents per million is plotted on the left scale (A),

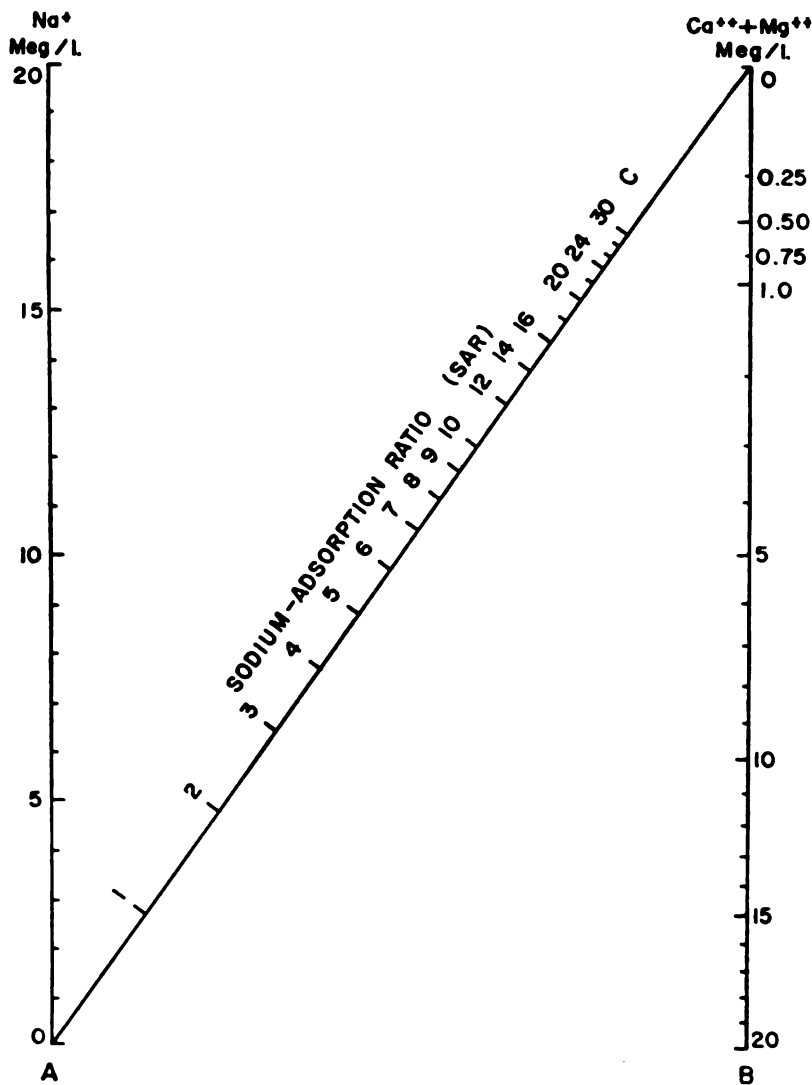


FIG. 10.—Nomogram for determining sodium-adsorption ratio of irrigation water.

and the concentration of calcium plus magnesium expressed in equivalents per million is plotted on the right scale (B). The point at which a line connecting these two points intersects the sodium-adsorption-ratio scale (C) indicates the sodium-adsorption ratio of the water. When the sodium-adsorption ratio and the electrical conductivity of a water are known, the suitability of the water



for irrigation can be determined by plotting these values on the diagram shown in Figure 11. Low-sodium water (S1) can be used for irrigation on almost all soils with little danger of the development of harmful levels of exchangeable sodium. Medium-sodium water

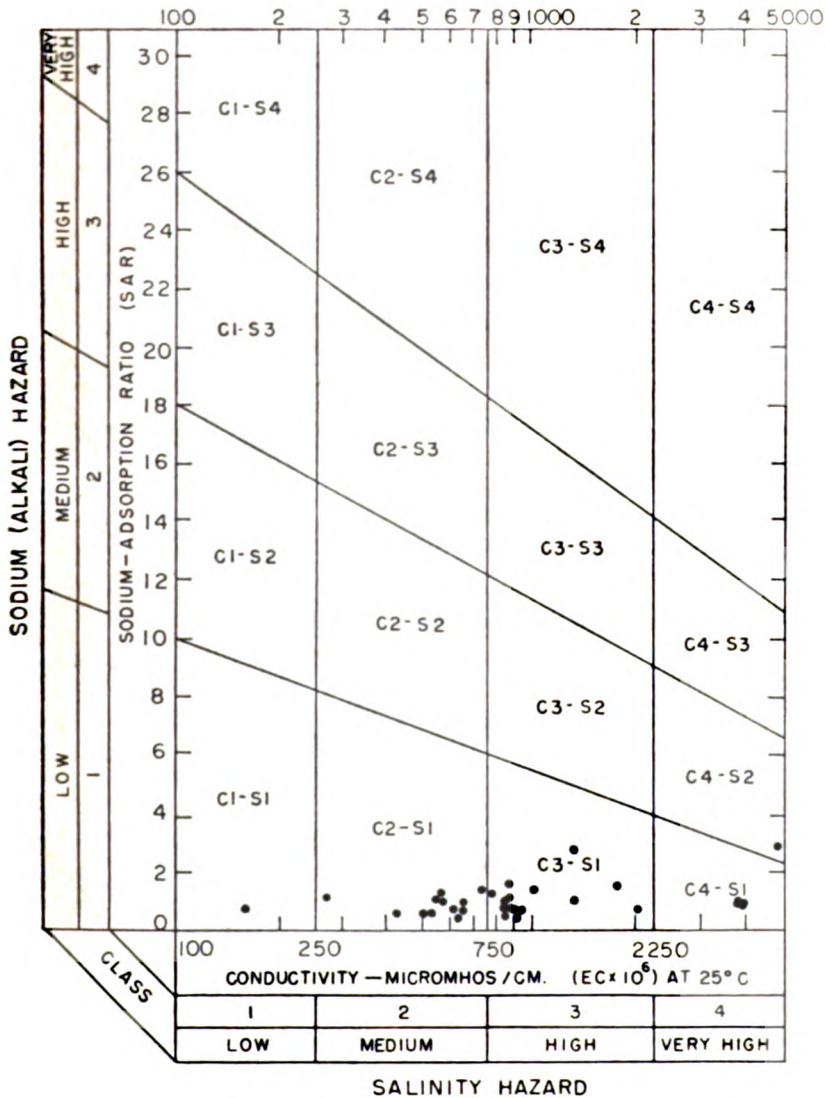


FIG. 11.—Diagram showing classification of water in Clay County for irrigation use.

(S2) will present an appreciable sodium hazard in certain fine-textured soils, especially under low-leaching conditions. This water may be safely used on coarse-textured or organic soils having good permeability. High-sodium water (S3) may produce harmful levels of exchangeable sodium in most soils and will require special soil management such as good drainage, high leaching, and additions of organic matter. Very high sodium water (S4) is generally unsatisfactory for irrigation unless special action is taken, such as addition of gypsum to the soil.

Low-salinity water (C1) can be used for irrigation of most crops on most soils with little likelihood that soil salinity will develop. Medium-salinity water (C2) can be used if a moderate amount of leaching occurs. Crops having moderate salt tolerances, such as potatoes, corn, wheat, oats, and alfalfa, can be irrigated with (C2) water without special practices. High-salinity water (C3) cannot be used on soils with restricted drainage. Very high salinity water (C4) can be used only on certain crops and then only if special practices are followed.

Boron is essential to normal plant growth, but the quantity required is very small. Crops vary greatly in their boron tolerances, but in general it may be said that the ordinary field crops common to Kansas are not adversely affected by boron concentrations of less than 1 ppm.

Prolonged use, under adverse conditions, of water having a high concentration of bicarbonate could have an undesirable effect upon the soil texture and plant growth.

Water samples (1 composite) from 33 wells and test holes are classified on Figure 11 to show the suitability of the water for irrigation use. The wells or test holes corresponding to points shown in Figure 11 are given in Table 5. Of 32 samples of water from Clay County, 2 are of low alkali hazard and low salinity hazard and are very good irrigation waters; 7 analyses indicate a low alkali hazard and medium salinity hazard, and the waters are satisfactory for irrigation of most crops grown in Clay County; 20 samples represent water of low alkali hazard but high salinity hazard, but as most of these samples fall within the lower part of the high-salinity area, only moderate precautionary measures would be necessary. Three samples were of low or medium alkali hazard but very high salinity hazard, and such waters are unfit for irrigation use. In general, the aquifers in Clay County that produce water that is unfit for irrigation do not produce large enough quantities to be considered for irrigation.

TABLE 5.—Sodium-adsorption ratios (SAR), conductivity (C), and class of water for irrigation for wells plotted on Figure 11.

Well number	SAR	C	Class	number	SAR	C	Class
6-1-2bac1	1.07	537	S1-C2	8-1-13ca	0.82	1,370	S1-C3
6-1-2cc	.75	563	S1-C2	8-2-30dd	1.56	1,780	S1-C3
6-1-15da	1.21	573	S1-C2	8-3-8db	.59	900	S1-C3
6-2-3ad	1.80	892	S1-C3	8-3-35da <sub>2</sub>	.47	515	S1-C2
6-2-32cc	.78	2,070	S1-C3	8-4-15de	.65	906	S1-C3
6-2-33cd	.62	820	S1-C3	9-2-30bb	.65	90	S1-C1
6-4-18ba	.85	3,950	S1-C4	9-3-1cc	1.00	853	S1-C3
6-4-33ad	.44	673	S1-C2	9-3-20be	.61	626	S1-C2
7-1-6bb	1.26	784	S1-C3	9-3-23cc	.37	635	S1-C2
7-1-15beb	2.16	1,330	S1-C3	9-4-21aa	.83	579	S1-C2
7-1-19be	1.8	272	S1-C2	9-4-32ade	.58	434	S1-C2
7-2-4dde	.60	803	S1-C3	10-1-17de	.70	186	S1-C1
7-3-4da	.60	3,970	S1-C4	10-2-17ed <sub>1</sub>	2.72	5,620	S2-C4
7-3-29cd	.69	896	S1-C3	10-2-23bb	1.58	743	S1-C2
*7-4-20ad-21be	.68	926	S1-C3	10-3-13ba	1.65	1,040	S1-C3
7-4-32cc	.52	887	S1-C3	10-4-32aa	.75	667	S1-C2

\* Composite sample from wells 7-4-20ad and 7-4-21be.

#### HYDROLOGIC PROPERTIES OF WATER-BEARING MATERIALS

The quantity of water that a water-bearing formation will yield to wells depends upon the hydrologic properties of the material from which the wells produce. The two hydrologic properties of greatest significance are the coefficients of transmissibility (T) and storage (S) and are used in making quantitative estimates of water available in an aquifer and of future water-level decline that will result from continued pumping. Controlled aquifer tests in the field provide the data required to compute these coefficients.

The coefficient of transmissibility (T) may be defined as the number of gallons of water at the prevailing temperature that will move in 1 day through a vertical strip of the aquifer 1 foot wide, having a height equal to the full thickness of the aquifer, under a hydraulic gradient of 1 foot per foot, or it is the number of gallons of water that will move in 1 day through a cross-sectional area equal to the saturated thickness of the aquifer and 1 mile wide under a hydraulic gradient of 1 foot per mile. The coefficient of storage (S) may be defined as the change in volume of water stored per unit surface area of aquifer per unit change in head. Under water-table conditions the coefficient of storage (S) is practically the same as the specific yield of the aquifer.

The coefficient of permeability (P) of an aquifer is the discharge per unit of area per unit of hydraulic gradient. It may be measured in terms of the number of gallons of water a day, at 60' F., con-

ducted laterally through each mile of aquifer under investigation (measured at right angles to the direction of flow) for each foot of thickness of the aquifer, and for each foot per mile of hydraulic gradient. The field coefficient of permeability ( $P_f$ ) is the same except that it is measured at the prevailing temperatures of the water rather than at 60° F. The coefficient of permeability may be expressed by the formula  $P_f = \frac{T}{m}$  where  $P_f$  is the field coefficient of permeability,  $T$  is the coefficient of transmissibility, and  $m$  is the thickness of the aquifer, in feet.

#### AQUIFER-TEST DETERMINATION OF TRANSMISSIBILITY AND PERMEABILITY

The coefficients of transmissibility and permeability of the alluvium and terrace deposits in the Republican River valley in the vicinity of Clifton were determined by an aquifer test using well 6-1-2ac owned by Mr. F. Turner and operated by Mr. H. Rhodes. Values for the coefficient of transmissibility ( $T$ ), storage ( $S$ ), and permeability ( $P$ ) were computed from the aquifer-test data by formulas developed by C. V. Theis and C. E. Jacob.

#### Theis Recovery Method of Determining Transmissibility

The recovery method of computing transmissibility ( $T$ ) developed by Theis (1935) utilizes a series of measurements of the water level in a well after a period of pumping.

The Theis recovery formula is expressed as:  $T = \frac{264Q \log_{10} t/t'}{s'}$

in which  $T$  is the coefficient of transmissibility, in gallons per day per foot,  $Q$  is the pumping rate, in gallons a minute,  $t$  is the time since pumping started, in minutes,  $t'$  is the time since pumping stopped, in minutes, and  $s'$  is the residual drawdown in the pumped well, in feet, at time  $t'$ .

The residual drawdown ( $s'$ ) is computed by subtracting the static-water-level measurement from the depth-to-water measurements at time  $t'$  after pumping ceases.

The proper ratio of  $\log_{10} t/t'$  to  $s'$  is determined graphically by plotting  $\log_{10} t/t'$  on the logarithmic coordinate and  $s'$  on the arithmetic coordinate of semilogarithmic paper. If  $\log_{10} t/t'$  is taken over one log cycle it will become unity. The formula may then be

expressed as  $T = \frac{264Q}{\Delta s}$ , where  $\Delta s$  is the difference in drawdown

over one log cycle. In practice, water levels at time  $t'$  may be plotted and the residual drawdown need not be computed. Because the value of  $T$  is directly related to the slope of the line formed by plotting water level against  $t/t'$ , the selection of the proper points on the plot to determine  $\Delta s$  is very important. Theoretically, the relation  $s'$  to  $t/t'$  should plot as a straight line that passes through the point where residual drawdown is 0 and where  $t/t'$  approaches unity. In unconsolidated deposits this is not always true, as the observed line is nearly always a curve and seldom passes through the point of origin. Generally the early points on the recovery curve are erratic and do not fall in a straight line. This may be due in part to head loss in the well or to the surge of the column of water, which falls back into the well after the pump is shut off. For this reason it would seem that the points on the curve corresponding to the late part of the recovery period would be the most reliable and should be used in determining  $\Delta s$ . For many aquifer tests the recovery data will not plot on a line that passes through the point where  $s' = 0$  and will not plot in a straight line in the latter part of the recovery period, and it is difficult to establish a line that will determine  $\Delta s$ . If the latest data where  $t/t'$  approaches 1 do not fall on a straight line, they should not be used. If the earlier points fall on a straight line they should be used, but if there is an appreciable curve to the line almost any value can be obtained for  $\Delta s$ , and hence the value of  $T$  can be considerably in error.

#### Straight-line Graphical Method of Determining Transmissibility and Storage Coefficient

The Theis (1935) nonequilibrium formula requires the use of a "type curve" on which the test-data curve is superimposed to determine the coefficients of transmissibility and storage. Cooper and Jacob (1946) devised a straight-line graphical method that does not require the type curve to accomplish the same purposes. In this method the data are plotted on semilogarithmic paper, on which the plotted points should fall in a straight line. Three equations were devised for determination of coefficients of transmissibility and storage by a distance-drawdown graph, a time-drawdown graph, and a composite graph. In the distance-drawdown graph, drawdown is plotted on the arithmetic scale and distance of observation wells in feet from the pumped well is plotted on the logarithmic scale. The formulas for coefficients of transmissibility and storage are:

$$T = \frac{264 Q}{\Delta s} \text{ and } S = \frac{0.3 T t}{r_o^2}.$$

In the time-drawdown graph, drawdown is plotted on the arithmetic scale and time in days is plotted on the logarithmic scale. The formulas for coefficients of transmissibility and storage are:

$$T = \frac{264 Q}{\Delta s} \text{ and } S = \frac{0.3 T t_0}{r^2}.$$

In the composite drawdown graph, drawdown is plotted on the arithmetic scale and the value  $t/r^2$  is plotted on the logarithmic scale. In this method the plots of all observation wells should fall in a straight line. The formulas for coefficients of transmissibility and storage are:

$$T = \frac{264 Q}{\Delta s} \text{ and } S = 0.3 T \times (t/r^2)_0.$$

In the above formulas, the symbols are:

**T** = coefficient of transmissibility, in gallons per day per foot

**S** = coefficient of storage

**Q** = rate of discharge of pumped well, in gallons per minute

**$\Delta s$**  = drawdown over one log cycle

**t** = time since pumping started, in days

**r** = distance from pumped well, in feet

**$t_0$**  = value of t where drawdown = 0

**$r_0$**  = value of r where drawdown = 0

**$(t/r^2)_0$**  = value of  $t/r^2$  where drawdown = 0

#### Turner Aquifer Test

An aquifer test was made in the fall of 1955 in which well 6-1-2ac was used. This well yields water from late Wisconsinan terrace deposits in the valley of Republican River. The well is of gravel-wall construction and is 18 inches in diameter and 70 feet deep. Three observation wells, a, b, and c, were drilled in a line at distances of 25, 50, and 100 feet respectively from the pumped well. The well was pumped at a rate of 800 gpm from 9:25 a. m. until 9:55 a. m., when pumping stopped for a period of 45 minutes, owing to a power failure. Pumping was resumed at 10:40 a. m. and continued until 1:13 p. m. Water-level measurements made during the pumping period and values for t are given in Table 6.

In Figure 12 the depth-to-water measurements in the pumped well are plotted against time since pumping started. A line drawn



TABLE 6.—Water-level measurements made during pumping and recovery periods in well 6-1-2ac, and values for (t).

Time	Time since pumping started, t, in minutes	Depth to water, in feet
9:20 a.m.	Static water level	22 21
9:25	Pumping started	
9:25:20	0 3	31 35
9:25:45	.75	32 87
9:26:15	1 25	33 55
9:26:45	1 75	33 99
9:27:15	2 25	34 17
9:28	3	34 44
9:29	4	34 77
9:29:30	4 5	34 86
9:30	5	34 95
9:30:30	5 5	35 04
9:31	6	35 11
9:31:30	6 5	35 19
9:32	7	35 26
9:32:30	7 5	35 32
9:33	8	35 36
9:33:30	8 5	35 42
9:34	9	35 48
9:34:30	9 5	35 52
9:35	10	35 57
9:36	11	35 67
9:37	12	35 78
9:38	13	35 83
9:39	14	35 89
9:40	15	35 95
9:45	20	36 15
9:50	25	36 47
9:55	Pump off (power failure)	
10:39		22 98
10:40	Pumping started	
10:40:30	75 5	33 87
10:41	76	34 77
10:41:30	76 5	35 16
10:42	77	35 42
10:42:30	77 5	35 67
10:43	78	35 81
10:44	79	36 00
10:44:30	79 5	36 10
10:45	80	36 20
10:45:30	80 5	36 29
10:46	81	36 38
10:46:30	81 5	36 44
10:47	82	36 52

TABLE 6.—Water-level measurements made during pumping and recovery periods in well 6-1-2ac, and values for (t).—Continued.

Time	Time since pumping started, t, in minutes	Depth to water, in feet
10:47:30 a.m.	82.5	36.57
10:48.	83	36.66
10:48:30.	83.5	36.70
10:49.	84	36.74
10:49:30.	84.5	36.78
10:50.	85	36.83
10:50:30.	85.5	36.87
10:51.	86	36.90
10:51:30.	86.5	36.93
10:52.	87	36.95
10:52:30.	87.5	36.97
10:53.	88	37.00
10:53:30.	88.5	37.01
10:54.	89	37.03
10:54:30.	89.5	37.06
10:55.	90	37.09
10:57.	92	37.16
10:59.	94	37.23
11:02.	97	37.35
11:05.	100	37.48
11:10 a.m.	105	37.61
11:15.	110	37.78
11:20.	115	37.90
11:25.	120	38.00
11:30.	125	38.13
11:35.	130	38.22
11:40.	135	38.30
11:50.	140	38.48
12:00 noon.	155	38.55
12:10 p.m.	165	38.60
12:20.	175	38.67
12:30.	185	38.81
12:40.	195	38.86
12:50.	205	38.90
1:00.	215	38.94
1:10.	225	38.96
1:13.	228 Pump off	.....
1:14.	229	26.83
1:15.	230	26.38
1:16.	231	26.17
1:17.	232	26.01
1:18.	233	25.90
1:19.	234	25.80
1:20.	235	25.71
1:21.	236	25.63

TABLE 6.—Water-level measurements made during pumping and recovery periods in well 6-1-2ac, and values for (t).—Concluded.

Time	Time since pumping started, t, in minutes	Depth to water, in feet
1:22 p.m. ....	237	25.57
1:23 .....	238	25.49
1:24 .....	239	25.44
1:25 .....	240	25.39
1:26 .....	241	25.35
1:28 .....	243	25.26
1:30 .....	245	25.16
1:32 .....	247	25.09
1:34 .....	249	25.02
1:36 .....	251	24.95
1:38 .....	253	24.90
1:41 .....	256	24.80
1:44 .....	259	24.74
1:47 .....	262	24.66
1:50 .....	265	24.58
1:54 .....	269	24.52
1:58 .....	273	24.45
2:02 .....	277	24.38
2:06 .....	281	24.32
2:10 .....	285	24.24
2:15 .....	290	24.15
2:21 .....	296	24.09
2:28 .....	303	24.01
2:35 .....	310	23.98
2:45 .....	320	23.91
2:55 .....	330	23.81
3:05 .....	340	23.74
3:15 .....	350	23.66
3:25 .....	360	23.60
3:35 .....	370	23.54
3:50 .....	385	23.46
4:05 .....	400	23.40
4:20 .....	415	23.32

through these points gives a value for  $\Delta s$  of 2.18. Applying the Cooper-Jacob formula,  $T = \frac{(264)(800)}{2.18} = 97,000$  gpd per foot.

The saturated thickness is 43 feet, and from the relation  $P = \frac{T}{m}$ ,  $P = 2,250$ . The pumped well had a drawdown of 17 feet while pumping 800 gpm; hence the specific capacity of the well was 47 gpm per foot of drawdown.

Depth-to-water measurements were made in observation wells a, b, and c during the test and are shown in Tables 7, 8, and 9.

Early in the test it was evident that observation well a was not responding to pumping as it should. The water-level measurements in Tables 7 and 8 indicate that the water level in observation well a was drawing down less than that in observation well b throughout the test. This was probably due to the lenticular nature of the aquifer rather than to any defect in the observation well, as tests made during the power failure indicated that the observation wells were open and functioning normally.

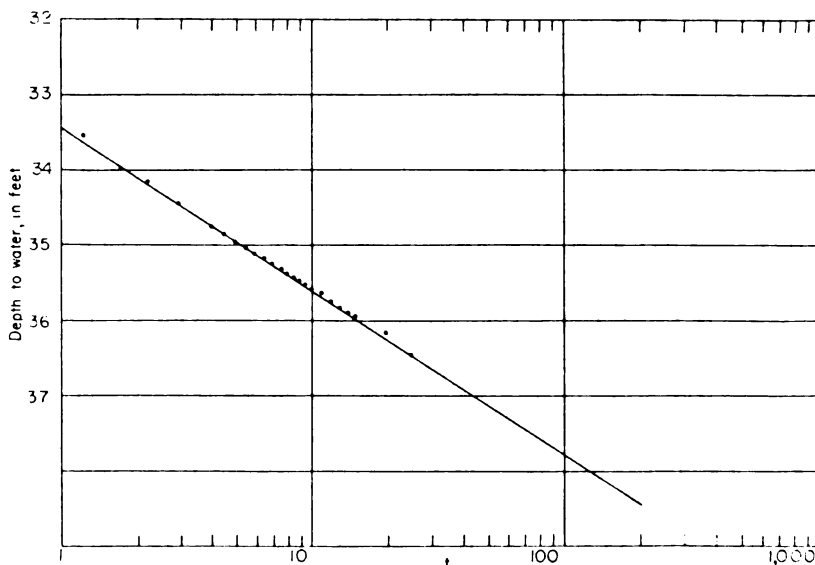


FIG. 12.—Depth to water in well 6-1-2ac plotted against time since pumping started.

TABLE 7.—Water-level measurements in observation well a, 25 feet from pumped well 6-1-2ac.

Time	Time since pumping started, t, in minutes	Depth to water, in feet
9:20 a.m. ....	Static water level	23 40
9:25 .....	Pumping started	
9:26 .....	1	24 31
9:27 .....	2	24 69
9:29 .....	4	25 05
9:30 .....	5	25 23
9:32 .....	7	25 56
9:34 .....	9	25 72
9:36 .....	11	25 93
9:38 .....	13	26 08
9:40 .....	15	26 23
9:42 .....	17	26 33
9:44 .....	19	26 47
9:46 .....	21	26 60
9:48 .....	23	26 69
9:50 .....	25	26 78
9:53 .....	28	26 98
9:55 .....	Pumping stopped	
10:38 .....		24 24
10:40 .....	Pumping started	
10:41 .....	1	25 12
10:42 .....	2	25 37
10:43 .....	3	25 75
10:44 .....	4	25 84
10:47 .....	7	26 05
10:49 .....	9	26 30
10:51 .....	11	26 50
10:53 .....	13	26 67
10:55 .....	15	26 84
10:57 .....	17	26 98
11:00 .....	20	27 10
11:05 .....	25	27 26
11:10 .....	30	27 48
11:15 .....	35	27 68
11:20 .....	40	27 86
11:25 .....	45	27 99
11:30 .....	50	28 13
11:35 .....	55	28 24
11:40 .....	60	28 32
11:45 .....	65	28 42
11:50 .....	70	28 50

TABLE 7.—*Water-level measurements in observation well a, 25 feet from pumped well 6-1-2ac.—Concluded.*

Time	Time since pumping started, t, in minutes	Depth to water, in feet
11:55 a.m.....	75	28.58
12:00.....	80	28.64
12:10 p.m.....	90	28.69
12:20.....	100	28.80
12:30.....	110	28.89
12:40.....	120	28.98
12:50.....	130	29.03
1:00.....	140	29.09
1:10.....	150	29.15



TABLE 8.—Water-level measurements in observation well b, 50 feet from pumped well 6-1-2ac.

Time	Time since pumping started, t, in minutes	Depth to water, in feet
9:20 a.m.	Static water level	23.34
9:25	Pumping started	.....
9:26:30	1.5	26.63
9:27:30	2.5	27.12
9:28:15	3.25	27.32
9:29		27.48
9:30	5	27.61
9:31	6	27.71
9:32	7	27.82
9:33	8	27.90
9:34	9	27.98
9:35	10	28.04
9:36	11	28.11
9:38	13	28.19
9:40	15	28.34
9:42	17	28.43
9:44	19	28.51
9:46	21	28.59
9:48	23	28.67
9:50	25	28.75
9:53	28	28.84
9:54	Pumping stopped	.....
10:38		24.00
10:40	Pumping started	.....
10:41:30	1.5 76.5	27.48
10:43	3 78	27.98
10:44	4 79	28.22
10:45	5 80	28.36
10:46	6 81	28.47
10:48	8 83	28.84
10:50	10 85	28.89
10:52	12 87	28.90
10:55	15 90	29.04
10:58	18 93	29.15
11:00	20 95	29.23
11:05	25 100	29.38
11:10	30 105	29.51
11:15	35 110	29.66
11:20	40 115	29.77
11:25	45 120	29.85
11:30	50 125	29.95

**TABLE 8.—Water-level measurements in observation well b, 50 feet from pumped well 6-1-3ac.—Concluded**

Time	Time since pumping started, t, in minutes		Depth to water, in feet
11:40 a.m.....	60	135	30.11
11:50.....	70	145	30.23
12:00 noon.....	80	155	30.33
12:10 p.m.....	90	165	30.45
12:20.....	100	175	30.54
12:30.....	110	185	30.63
12:40.....	120	195	30.69
12:50.....	130	205	30.73
1:00.....	140	215	30.79

TABLE 9.—Water-level measurements in observation well c, 100 feet from pumped well 6-1-2ac.

Time	Time since pumping started, t, in minutes	Depth to water, in feet
9:20 a.m.	Static water level	23.53
9:25	Pumping started	
9:26	1	23.57
9:27	2	23.64
9:28	3	23.73
9:29	4	23.81
9:30	5	23.88
9:31	6	23.97
9:32	7	24.04
9:33	8	24.12
9:34	9	24.18
9:35	10	24.24
9:36	11	24.31
9:37	12	24.38
9:38	13	24.44
9:39	14	24.50
9:40	15	24.56
9:42	17	24.66
9:44	19	24.78
9:46	21	24.90
9:48	23	25.00
9:50	25	25.09
9:53	28	25.21
9:54	Pumping stopped	
10:38		24.37
10:40	Pumping started	
10:41	1	24.39
10:42	2	24.45
10:43	3	24.52
10:44	4	24.58
10:45	5	24.66
10:46	6	24.73
10:47	7	24.79
10:48	8	24.86
10:49	9	24.93
10:50	10	24.99
10:52	12	25.10
10:54	14	25.21
10:56	16	25.23
10:58	18	25.42
11:00	20	25.51
11:03	23	25.63
11:06	26	25.76
11:09	29	25.86

TABLE 9.—*Water-level measurements in observation well c, 100 feet from pumped well 6-1-2ac —Continued.*

Time	Time since pumping started, t, in minutes	Depth to water, in feet
11:12 a.m.	32	26.00
11:15	35	26.09
11:20	40	26.25
11:25	45	26.38
11:30	50	26.52
11:35	55	26.62
11:40	60	26.71
11:45	65	26.94
11:50	70	26.95
11:55	75	27.02
12:00 noon	80	27.07
12:10 p.m.	90	27.20
12:20	100	27.30
12:30	110	27.43
12:40	120	27.49
12:50	130	27.57
1:00	140	27.59
1:10	150	27.67
1:13	Pumping stopped	
1:14	1	27.62
1:15	2	27.58
1:16	3	27.53
1:17	4	27.45
1:18	5	27.42
1:19	6	27.39
1:20	7	27.29
1:21	8	27.28
1:22	9	27.22
1:23	10	27.17
1:24	11	27.13
1:25	12	27.09
1:26	13	27.05
1:27	14	27.01
1:28	15	26.97
1:29	16	26.93
1:30	17	26.88
1:31	18	26.86
1:32	19	26.83
1:33	20	26.78
1:34	21	26.76
1:35	22	26.73
1:36	23	26.69
1:37	24	26.67
1:38	25	26.64
1:40	27	26.58

TABLE 9.—*Water-level measurements in observation well c, 100 feet from pumped well 6-1-2ac. —Continued.*

Time	Time since pumping stopped, t, in minutes	Depth to water, in feet
1:45 p.m. ....	32	26.45
1:50 ..... ..	37	26.34
1:55 ..... ..	42	26.23
2:00 ..... ..	47	26.14
2:05 ..... ..	52	26.05
2:10 ..... ..	57	25.97
2:15 ..... ..	62	25.89
2:20 ..... ..	67	25.82
2:25 ..... ..	72	25.75
2:30 ..... ..	77	25.69
2:40 ..... ..	87	25.58
2:50 ..... ..	97	25.49
3:00 ..... ..	107	25.39
3:10 ..... ..	117	25.31
3:20 ..... ..	127	25.23
3:31 ..... ..	138	25.14
3:45 ..... ..	152	25.05
4:00 ..... ..	167	25.00
4:15 ..... ..	182	24.88

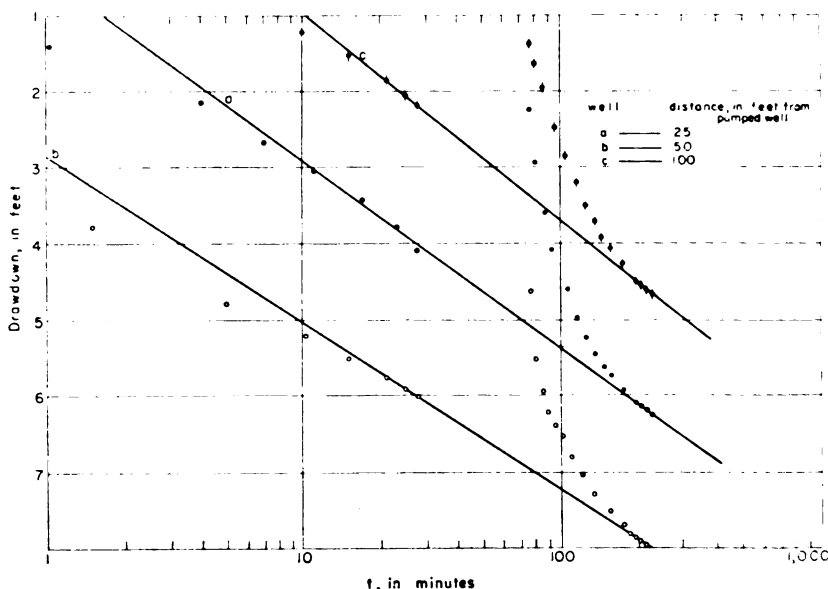


FIG. 13.—Drawdown in observation wells a, b, and c plotted against time since pumping started, during test using well 6-1-2ac.

The drawdowns in observation wells a, b, and c are plotted against the time since pumping started (Fig. 13). Lines through the latest points prior to the power failure pass through the latest points in the test in all the plots. Applying the Cooper-Jacob formula, values for the coefficient of transmissibility from the fluctuations in observation wells a, b, and c are 87,000, 97,000, and 79,000 gpd per foot respectively. The storage coefficient, from measurements in wells a and c, was 0.03 and 0.02, respectively, indicating water-table conditions.

A line through the latest points in the recovery curve for well c (Fig. 14) gives a value for  $s = 2.17$ . Applying the formula

$$T = \frac{(264)(800)}{2.17}$$

gives a result of 97,000 gpd/per foot.

**Summary.**—The values of  $T$  obtained from the aquifer test using well 6-1-2ac ranged from 79,000 to 97,000 gpd per foot. The lowest value was 79,000 gpd per foot from observation well a and the highest value, 97,000 gpd per foot, from the pumped well, observation well b, and the recovery curve for observation well c. The test is not conclusive, but 90,000 gpd per foot is probably about the cor-

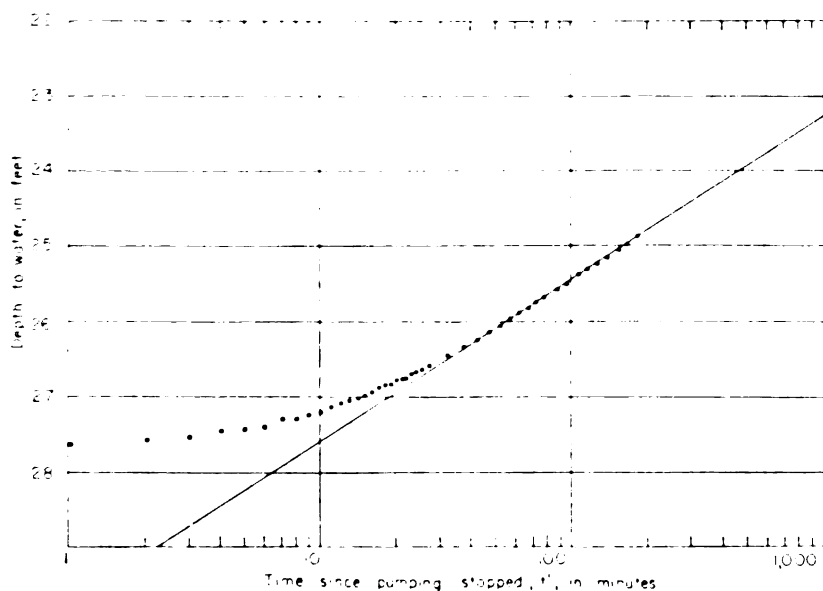


FIG. 14.—Depth to water in observation well c plotted against time since pumping stopped, during test using well 6-1-2ac.

rect value of  $T$  in the area of the well. The test shows that the aquifer is not homogeneous and that conditions are variable within short distances. The values for  $S$  are too small to have any significance, because of the shortness of the period of pumping.

## ROCK UNITS AND THEIR WATER-BEARING PROPERTIES

### PERMIAN SYSTEM

#### Wolfcampian Series—Chase Group

##### *Barneston Limestone*

In Clay County the Barneston Limestone crops out in the vicinity of Wakefield in the valley walls of Republican River and its tributaries. The Barneston Limestone contains the thickest and most resistant limestone beds in the county, and in the area to the east it is one of the principal scarp-forming rocks of the Flint Hills. In Clay County the Barneston Limestone occupies a fairly low topographic position and does not form a prominent scarp. The members of the Barneston Limestone, in ascending order, are the Florence Limestone, the Oketo Shale, and the Fort Riley Limestone members.



The Florence Limestone member is very easily recognized in Clay County because it is the only rock unit more than a few feet thick that contains a preponderance of chert or flint. The member is primarily a series of beds of limestone and beds of chert. The chert beds are generally of about the same thickness as the limestone beds. At most places a very dark gray or black impure limestone bed about 2 feet thick forms the base of the Florence Limestone member, and a persistent shale bed about 2 feet thick occurs in the upper part of the member. The Florence contains abundant fossils of many varieties. The thickness of the member ranges from 35 to 40 feet.

In Clay County the Oketo Shale member averages about 5 feet in thickness. It is composed chiefly of fossiliferous hard gray calcareous shale.

The lower few feet of the Fort Riley Limestone member is composed chiefly of thin-bedded yellow limestone. The limestone beds are overlain by a few feet of gray shale, which is easily confused with the underlying Oketo Shale member unless the Florence Limestone member is exposed also. Next above this shale bed is a massive bed of yellow limestone about 5 feet thick. This bed, which weathers to a pitted surface, is the rimrock, characteristic of nearly all exposures of the Fort Riley Limestone member (Pl. 4A). The rimrock bed is overlain by 15 to 20 feet of thin-bedded sandy yellow limestone and thin calcareous shale beds. In some exposures, a massive bed that has much the same appearance as the rimrock occurs in the upper part of the member. The average thickness of the member is about 35 feet.

Both the Florence and Fort Riley Limestone members are important aquifers in Clay County, but the Oketo Shale member does not yield appreciable quantities of water. A properly constructed well that penetrates the entire thickness of the Barneston Limestone may produce as much as 350 gpm.

In areas where the Barneston Limestone is deeply buried it may yield water that is too mineralized for domestic use. Several wells are known to obtain water of satisfactory quality from the Barneston Limestone at a depth of almost 200 feet, however.

### *Doyle Shale*

The Doyle Shale is composed of two shale members separated by a limestone member—in ascending order, the Holmesville Shale, the Towanda Limestone, and the Gage Shale members.

**A**



**PLATE 4. A,** Rimrock formed by Fort Riley Limestone member, SE $\frac{1}{4}$  NE $\frac{1}{4}$  sec. 27, T. 9 S., R. 4 E.; **B,** Exposure of Winfield Limestone, SE $\frac{1}{4}$  NE $\frac{1}{4}$  sec 19, T. 10 S., R. 4 E.

The Holmesville Shale member consists of 20 to 25 feet of varicolored calcareous shale. Calcite veinlets and thin impure limestone beds are present in the lower few feet of the member in most places.

The Towanda Limestone member is composed chiefly of platy and nodular beds of gray to yellow limestone. In most weathered exposures the member has a very broken and deformed appearance, and the upper limestone beds may be limonite stained and may contain many calcite veinlets. The average thickness of the Towanda Limestone member is about 10 feet.

The Gage Shale member, which in Clay County has an average thickness of about 35 feet, is composed of a lower unfossiliferous varicolored shale and an upper very fossiliferous gray and yellow shale.

The Doyle Shale is not an important aquifer in Clay County, but locally the Towanda Limestone member may yield as much as 5 gpm to properly constructed wells.

#### *Winfield Limestone*

The members of the Winfield Limestone, in ascending order, are the Stovall Limestone, the Grant Shale, and the Cresswell Limestone members.

The Stovall Limestone member consists of a single bed of gray to tan hard cherty limestone about 1 foot thick. It is nonresistant to weathering and is not well exposed in many places. Echinoid spines are the most common fossils in the Stovall. It is easily recognized by its uniform thickness and chert content.

The Grant Shale member has a uniform thickness of about 10 feet in Clay County. It is composed chiefly of tan and gray shale but includes some darker shale in the upper part. It contains many fossil brachiopods, and many quartz geodes are present in the upper part.

The Cresswell Limestone member now includes all the sequence of rocks that in some earlier reports was divided into the Cresswell Limestone member and the Luta Limestone member. The Cresswell Limestone member as now defined consists of a lower massive bed of yellow limestone, containing numerous echinoid spines and other fossils and characterized by pinkish-brown splotches on weathered surfaces, and an upper thin-bedded to concretionary sequence of limestone and shale (Pl. 4B). The thickness of the Cresswell Limestone member in Clay County is about 13 feet.

The Winfield Limestone yields water in quantities sufficient for most domestic and stock supplies, and where the formation is not deeply buried, the water is of good quality.

#### *Odell Shale*

The Odell Shale in Clay County consists of about 23 feet of shale. The lower few feet of the shale is principally yellow, and the middle and upper parts of it are mostly red and more calcareous than the lower part.

The Odell Shale does not yield water to wells in Clay County.

#### *Nolans Limestone*

The Nolans Limestone includes, in ascending order, the Krider Limestone, Paddock Shale, and Herington Limestone members. The thickness of the formation in Clay County ranges from 18 to 23 feet.

The Krider Limestone member consists of one bed of limestone or of two beds separated by a thin shale bed. The total thickness of the Krider Limestone member is not known to exceed 2 feet. In most places the limestone portion of the member is yellow sandy-appearing nodular limestone containing many fossil brachiopods and pelecypods.

The Paddock Shale member consists of 11 to 13 feet of gray fossiliferous shale.

The Herington Limestone member is the most conspicuous part of the Nolans Limestone. Although it is not as resistant to weathering as the Cresswell Limestone member of the Winfield Limestone, the Herington does form an escarpment in favorable topographic situations. In most places the member consists of 6 to 8 feet of yellow to brown, pelecypod-bearing limestone. The upper part is almost everywhere more massive than the lower part of the member (Pl. 5A).

The Nolans Limestone is not a good aquifer in Clay County. The Krider Limestone and Paddock Shale members are not known to yield water. Under favorable conditions the Herington Limestone member might yield some water to domestic and stock wells.

#### Leonardian Series—Sumner Group

##### *Wellington Formation*

The Wellington Formation is not well exposed in Clay County, hence can be described only from observations in other areas and from the interpretation of well logs.

The lower part of the Wellington Formation in Clay County consists chiefly of greenish-gray and red clay shale. Locally, a massive

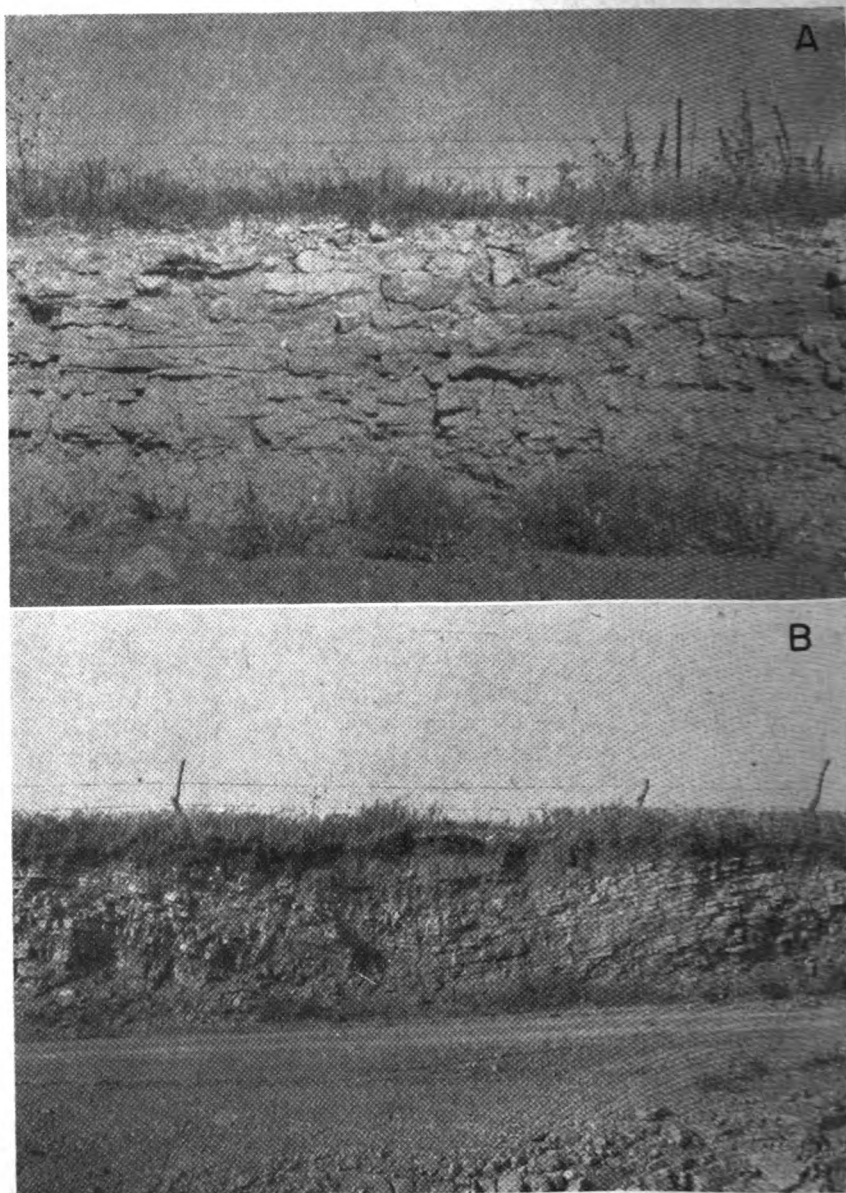


PLATE 5. A, Herington Limestone member exposed in road cut, NW $\frac{1}{4}$  sec. 9, T. 9 S., R. 3 E.; B, Hollenberg Limestone member in NW $\frac{1}{4}$  sec. 32, T. 6 S., R. 4 E.

bed of gypsum forms the base of the formation in contact with the Herington Limestone member of the Nolans Limestone. This massive bed of gypsum is well exposed in the southwest bank of a creek about 100 feet east and 300 feet south of the center of the west line of sec. 19, T. 6 S., R. 4 E.

A bed of impure dolomitic limestone, the Hollenberg Limestone member, lies about 40 feet above the base of the Wellington Formation in the northern part of the county. In the area southwest of Broughton the sequence between the Herington Limestone member and the Hollenberg Limestone member may be as thin as 20 feet. The Hollenberg is typically a succession of light-yellow earthy limestone and shale beds, each of which is about 3 to 5 inches thick. In almost every observed exposure in Clay County, the Hollenberg is deformed by many small anticlines and synclines (Pl. 5B) having an amplitude of only a few feet and a distance between crests of about 20 feet. Small-scale faulting also is very common in exposures of the Hollenberg (Pl. 6A). The thickness of the Hollenberg ranges from slightly less than 1 foot to 5 feet.

That part of the Wellington Formation that overlies the Hollenberg Limestone member in Clay County is in general darker than that below. At several widely scattered points a thin discontinuous bed of dark-gray to black chert was found about 12 to 15 feet above the Hollenberg Limestone member. The Hutchinson Salt member, which occurs in the middle part of the formation farther southwest, does not underlie any of Clay County. The greatest thickness of Wellington Formation underlying Clay County is not known, but probably is about 250 feet.

The Wellington Formation yields only very small quantities of water of poor quality to wells in Clay County. One spring (7-3-4da) discharges about 200 gpm of mineralized water from the Wellington Formation.

#### CRETACEOUS SYSTEM

##### Comanchean Series

##### *Kiowa Shale*

The base of the Cretaceous rocks is marked by a major unconformity indicated by a cobble zone. The cobbles consist of quartzite, chert, igneous rock, and many types of metamorphic rocks. At many places in Clay County the Dakota Formation rests on the Wellington Formation, the cobble zone being incorporated in the base of the Dakota Formation, and the Kiowa Shale is absent. At a few localities in southern Clay County a dark clay shale resem-

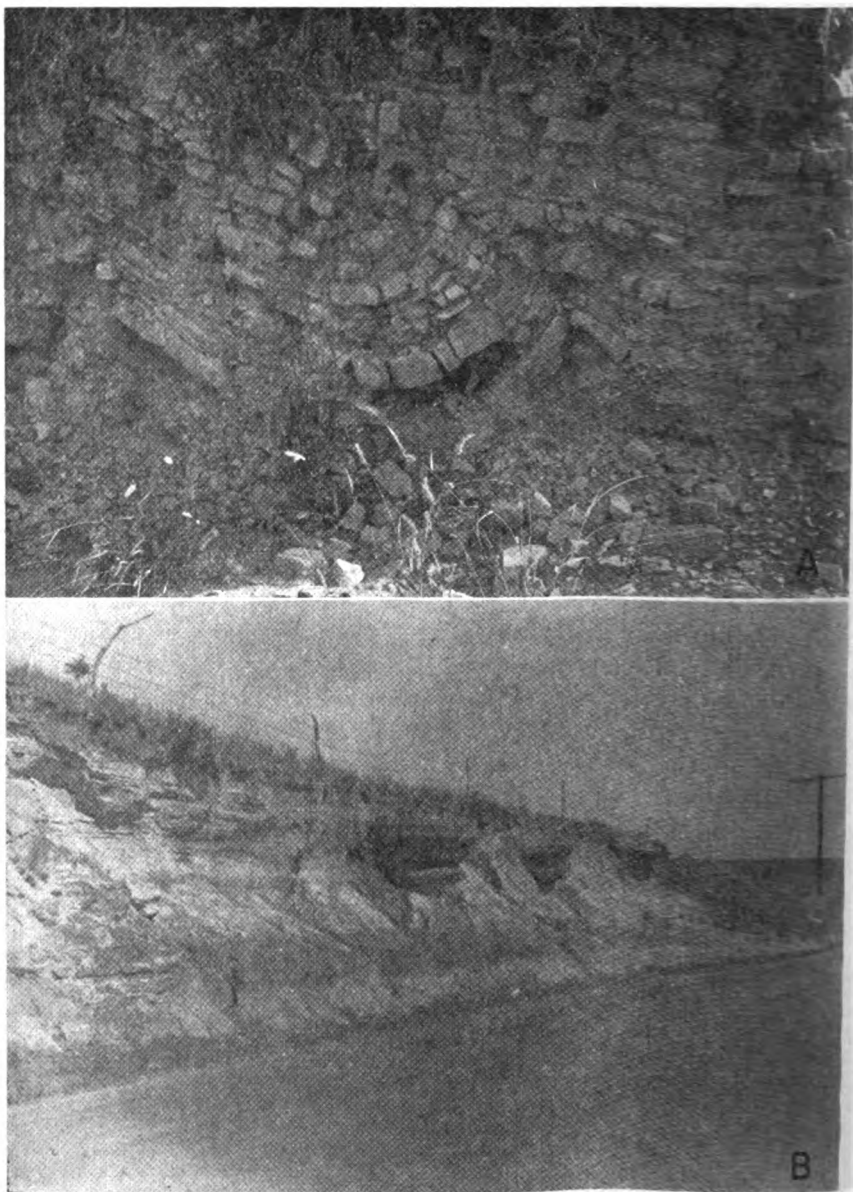


PLATE 6. A, Faulting in Hollenberg Limestone member in NW $\frac{1}{4}$  sec. 32, T. 6 S., R. 4 E.; B, Concretions in Dakota Formation, NE $\frac{1}{4}$  sec. 17, T. 10 S., R. 1 E.



bling the Kiowa crops out at about the contact between the Permian and Cretaceous, but at these localities the cobble zone is not noticeably present at the base of the shale, and the age of the shale is not known. Because the Kiowa Shale was not definitely recognized in Clay County and because of the similarity of their water-bearing characteristics to those of the Wellington Formation, these deposits are included with the Wellington Formation, and the Kiowa Shale is not shown on the geologic map.

Gulfian Series—Colorado Group

*Dakota Formation*

The Dakota Formation in Kansas consists of two members, the lower Terra Cotta Clay member and the upper Janssen Clay member. The Dakota Formation popularly is believed to consist chiefly of sandstone, but as the member names indicate, clay is the dominant material in most of Kansas. The formation consists entirely of continental or near-shore deposits. Study of surface exposures and test-hole cuttings shows that the formation consists principally of clay of various colors but contains discontinuous beds and lenses of sandstone and siltstone. Minor amounts of pyrite, limonite, hematite, and siderite as concretions (Pl. 6B), thin beds of lignite, and small lenses of quartzitic sandstone are scattered throughout the formation.

In the subsurface most of the sandstone is light gray, but upon being exposed to weathering it becomes yellow, dark brown, or almost red. Some of the sandstone beds are very resistant to weathering and form bold outcrops.

The Dakota Formation is the youngest Cretaceous formation exposed in Clay County, and where it occurs its top is an erosional surface. The thickness of the Dakota Formation in Clay County ranges from a feathered edge to about 165 feet.

The Dakota Formation is one of the principal aquifers in Clay County. The water is generally of good quality. Few wells in Clay County that obtain water from the Dakota Formation yield more than 30 gpm, but it is likely that test drilling in some areas might locate a sufficient thickness of sandstone to yield as much as 100 gpm. Water in the Dakota Formation is under artesian pressure in most parts of Clay County. No flowing wells were observed in the county, but a well flowing from the Dakota Formation is lo-

cated a few feet west of the county line in Cloud County. Chemical analyses of water from the Dakota Formation are shown in Table 3 and in Figure 8.

#### QUATERNARY SYSTEM

##### Pleistocene Series

Pleistocene deposits of Nebraskan age possibly are present in Clay County but are unimportant quantitatively. During the first stage of the Pleistocene Epoch there were probably no well-established lines of through drainage, and erosion was the dominant process. Remnants of conglomerate (Pl. 7A), which are exposed in several places in northeastern and south-central Clay County, probably were deposited during Nebraskan or early Kansan time. The conglomerate contains pebbles and fragments of sandstone and limestone derived from Cretaceous rocks and is overlain by loess of Illinoian and Wisconsinan age. These deposits are not known to exceed 4 feet in thickness, and because they cover a very small area they are not shown on the geologic map.

##### Kansan Stage

A few feet of locally derived gravel of probable Kansan age underlies the alluvium of Republican River upstream from Clay Center. Although Republican River did not flow through Clay County during Kansan time, a stream whose headwaters were in the drainage area of what is now White Rock Creek in Jewell County probably flowed where Republican River now has its course through Clay County. In most places this deposit of limestone and sandstone gravel (Grand Island Formation) is 6 to 10 feet thick and in some places is overlain by a few feet of clay of the Sappa Formation.

The water in the basal gravels has about the same quality as that in the overlying Recent alluvium. The Kansan gravel deposits are made up of more angular particles than other valley-fill deposits in the county and probably do not yield as much water as an equal thickness of younger gravel. They do add considerably to the total yield of wells in northwestern Clay County, however.

##### Illinoian Stage

*Terrace deposits.*—Deposits of Illinoian age in Clay County are represented by the Crete Formation along Republican River and its major tributaries. The Crete Formation in Clay County is in the form of terrace deposits and consists chiefly of silt and clay contain-

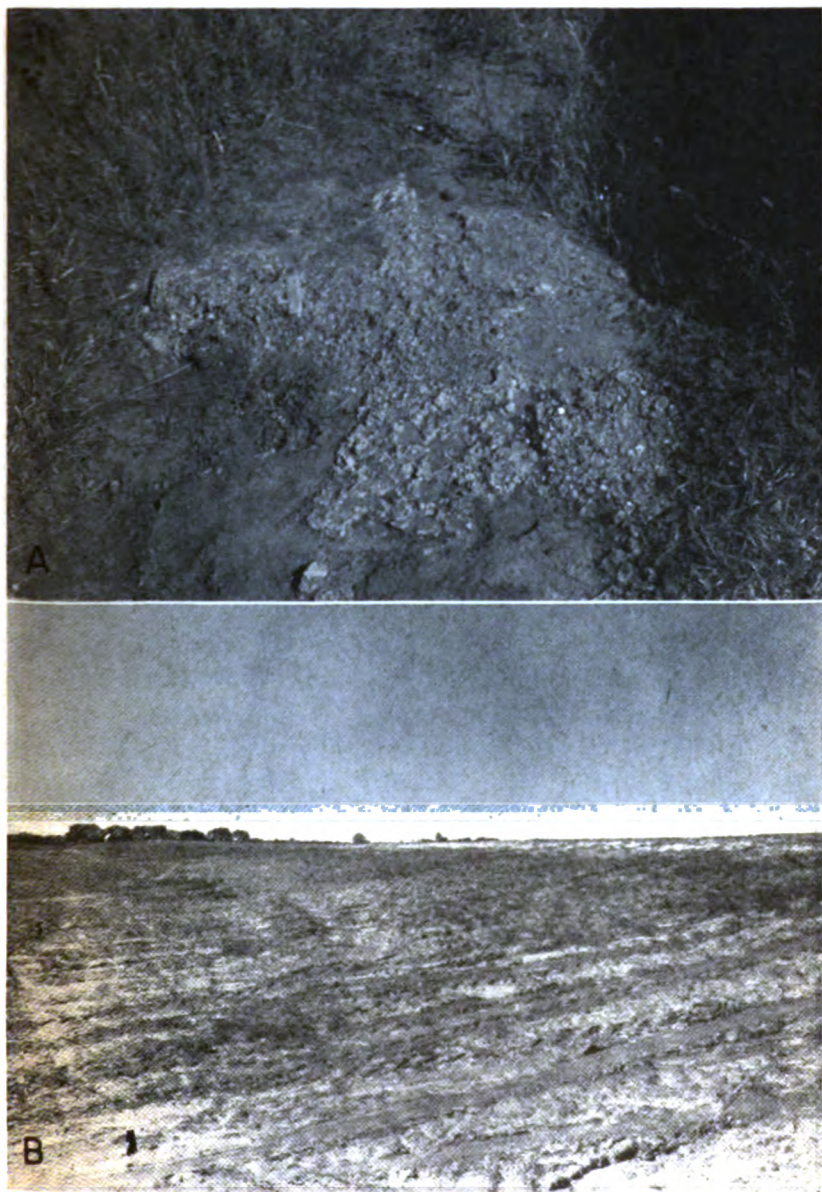


PLATE 7. A, Exposure of Pleistocene conglomerate, center south side sec. 10, T. 10 S., R. 2 E.; B, Prominent scarp formed by Wisconsin terrace, NE¼ sec. 2, T. 6 S., R. 1 E.

ing minor amounts of sand and gravel. Nearly all the deposits of the Crete Formation in Clay County are blanketed by a thick covering of Peoria loess, and are not shown on the geologic map. The upper surface of the Crete Formation at most places in Clay County is about 30 to 40 feet above flood plain level.

The Crete Formation in Clay County is generally only partly saturated; however, a bed of locally derived gravel, which is present in many places at the base of the formation, is generally saturated and yields small to moderate supplies of water.

*Eolian deposits.*—Much of the upland area of Clay County as well as the Crete Formation is blanketed with wind-deposited silt commonly known as loess. All the loess in Clay County is included in the Sanborn Group, but only the oldest silt formation, the Loveland Formation, is of Illinoian age. In fresh exposures the Loveland consists of reddish-yellow silt and clay. Most deposits in Clay County are only a few feet thick, and at some localities they are entirely contained within the Sangamon soil, which was developed on the Loveland during the interglacial period between the Illinoian and Wisconsinan glaciers. The Loveland Formation is above the water table and does not yield water to wells.

#### *Wisconsinan Stage*

*Terrace deposits.*—Deposits of sand, gravel, and clay locally almost 70 feet thick were laid down along Republican River and other major streams during Wisconsinan time. The streams have subsequently cut to a lower level and these alluvial deposits now form low terraces above the flood plain. These terraces were mapped solely on the basis of topographic expression and probably include both early and late Wisconsinan deposits (Pl. 1).

The Wisconsinan terrace deposits along Chapman Creek and the streams tributary to Republican River are composed chiefly of silt and clay but contain minor amounts of locally derived sand and gravel in the lower part. These deposits yield small to moderate quantities of water to wells, adequate only for domestic or stock use.

The Wisconsinan terrace deposits of Republican River in Clay County are composed almost entirely of arkosic sand and gravel, with the exception of the upper 15 to 20 feet, which in most places is silt and clay. No evidence of a continuous clay bed at the base of the Wisconsinan terrace deposits such as occurs near Concordia, in Cloud County, was found in Clay County. The Wisconsinan

terrace deposits lack the hummocky topography typical of the Recent alluvium, and the upper surface of the terrace deposits lies about 12 feet above the upper surface of the alluvium (Pl. 7B). In the area northwest of Clay Center, the Wisconsin terrace deposits along Republican River yield large quantities of water to wells. Downstream from Clay Center, where the valley is cut through more resistant rocks, the terrace deposits are thinner and more restricted laterally, and the available supply of ground water is somewhat less than in the valley upstream from Clay Center. Water from the Wisconsin terrace deposits in Clay County is hard but otherwise satisfactory for most uses.

*Eolian deposits.*—Large areas of Clay County are mantled by deposits of loess, or wind-deposited silt, of Wisconsin age. This silt of the Peoria Formation is contemporaneous with or older than the Wisconsin terrace deposits. The silt of the Peoria Formation is gray buff and in most places is separated from the underlying reddish-yellow silt of the Loveland Formation by the Sangamon soil. The silt of the Peoria Formation, like all silts, has low permeability and retards the downward movement of rain water, and thus hinders recharge in the upland areas of Clay County. The Peoria Formation lies above the water table and does not yield water to wells.

#### *Recent Stage*

*Alluvium.*—Most of the streams of Clay County traverse flood plains underlain by alluvium of Recent age. The alluvium consists predominantly of sand and gravel but includes some silt and clay. The upper surface of the alluvium is characteristically very hummocky and in most places lies about 12 feet lower than the upper surface of the Wisconsin terraces. Much of the alluvium is covered by water during major floods; it is subjected to erosion in some places, but in other places a small amount of additional material is added. The composition of the alluvium is nearly the same as that of the Wisconsin terrace deposits, but as the alluvium is somewhat thicker and generally has a greater percentage of saturation, somewhat larger yields of water are obtained from wells in the alluvium.

The quality of the water in the alluvium of Republican River in Clay County is about the same as that of the water in the Wisconsin terrace deposits. The water is hard but not strongly mineralized.

*Dune sand.*—In an area west of Vining, an area north of Wakefield, and in several smaller areas along Republican River, the wind has piled up sand from the channel and flood plain to form dunes. These dunes are still active in spots, and very little soil has developed on them. The dune areas are composed of many sand hills or dunes interspersed with undrained depressions. The dunes are above the water table and do not yield water to wells, but because of their permeability and lack of drainage they form important recharge facilities for the underlying alluvium and terrace deposits.

**RECORDS OF WELLS**

Records of 143 wells, 28 test holes, and 110 auger holes in Clay County are given in Table 10. All information classed as reported was obtained from the owner or tenant. Reported depths of wells are given in feet; measured depths are in feet and tenths. Reported depths to water level are given in feet; measured depths to water level are given in feet, tenths, and hundredths. The well-numbering system used in this table is explained on page 12.

TABLE 10.—Records of wells, springs, and test holes in Clay County

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet, (2)	Diameter of well, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet, (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
6-1-1ba...	T. 6 S., R. 1 E. NE NW sec. 1.	U. S. Geol. Survey	A	29.0	4	Sand	Terrace deposits	N	N	Land surface	0.0	1266.6	22.70	4-16-54	Did not reach bed-rock.
6-1-1bc...	SW NW sec. 1.	Northern Natural Gas Co.	D	50	16	Sand and gravel	do	T, E	Ind.	do	0.0	1264.0	22		Four wells; one symbol on Pl. 2
6-1-2ac...	SW NE sec. 2.	F. Turner	D	70.0	18	do	do	T, T	I	Hole in pump base	0.2	1265.4	22.01	10-12-55	Aquifer test run 10-12-55.
6-1-2baa...	NE NW sec. 2.	U. S. Geol. Survey	A	29.0	4	do	do	N	N	Land surface	0.0	1269.1	25.00	4-16-54	Did not reach bed-rock.
*6-1-2bae1..	NE NW sec. 2.	City of Clifton	D	65.0	12	do	do	T, E	P	do	0.0	1268.4	21	4- 5-49	Drillers log of near-by test hole is given.
6-1-2bae2..	NE NW sec. 2.	do	D	66	12	do	do	T, E	P	do	0.0	1267.9			Test hole drilled by Layne Western.
6-1-2bae3..	NE NW sec. 2.	do	D	62	4	do	do	N	N	do	0.0		21		Test hole.
6-1-2bb...	NW NW sec. 2.	U. S. Geol. Survey	D	70	4	do	do	N	N	Hole in pump base	0.0	1272.0	10.17	6-17-54 10-25-55	Test hole. Drilled in 1955.
6-1-2bc...	SW NW sec. 2.	C. Nelson	D	56.5	18	do	do	T, T	I	do	2.0	1261.6			Not used that season.
*6-1-2ce...	SW SW sec. 2.	U. S. Geol. Survey	D	70	4	do	Alluvium	N	N	Land surface	0.0	1256.8	7.10	6-19-54	Test hole.
6-1-2dbs...	NW SE sec. 2.	C. Anderson	D	60.4	18	do	Terrace deposits	T, T	I	Hole in pump base	0.2	1264.5	23.07	10-25-55	Test hole.
6-1-3aa...	NE NE sec. 3.	U. S. Geol. Survey	A	29.0	4	Sand	do	N	N	Land surface	0.0	1269.9	34.50	4-16-54	Did not reach bedrock.
6-1-3abb...	NW NE sec. 3.	do	A	29.0	4	do	do	N	N	do	0.0	1270.8	18.00	4-16-54	do
6-1-3ad...	SE NE sec. 3.	do	A	14.0	4	do	do	N	N	do	0.0	1260.9	10.70	4-16-54	do
6-1-3add...	SE SE sec. 3.	do	A	9.0	4	do	Alluvium	N	N	do	0.0	1256.8	7.20	4-16-54	do
6-1-4aaa...	NE NE sec. 4.	do	A	34.0	4	Sand and gravel	Terrace deposits	N	N	do	0.0	1272.1	19.20	4-15-54	do
6-1-4abb...	NW NE sec. 4.	do	A	24.0	4	Sand	do	N	N	do	0.0	1271.8	20.70	4-15-54	do
6-1-4bb...	NW NW sec. 4.	do	A	24.0	4	do	do	N	N	do	0.0	1272.7	19.10	4-15-54	do



6-1-5abb.	NW NE sec. 5	do	A	24 0	4	N	Sand and gravel	do	N	0 0	1275 2	18 80	4 15 54	do
6-1-5aaa.	NE NE sec. 6	do	A	19 0	4	N	do	do	N	0 0	1270 2	14 70	4 15 54	do
6-1-5baa.	NW NE sec. 6	do	A	19 0	4	N	do	do	N	0 0	1272 2	13 00	4 15 54	do
6-1-5bba.	SE NE sec. 10	do	A	14 0	4	N	Sand	Alluvium	N	0 0	1258 3	10 20	4 16 51	do
6-1-5cbb.	SE NE sec. 11	do	A	70	4	N	do	do	N	0 0	1258 3			Test hole.
6-1-5dab.	NW NE sec. 14	do	D	77	4	N	do	do	N	0 0	1267 0			do
6-1-5eab.	NW NE sec. 15	do	A	39 0	4	N	do	Terrace deposits	N	0 0	1267 0	27 60	4 16 51	do
6-1-5fab.	SE NE sec. 15	do	A	30 0	4	N	do	do	N	0 0	1261 2	27 00	4 16 51	do
6-1-5gab.	SE NE sec. 15	do	A	83	4	N	do	do	N	0 0	1261 2	27 00	4 16 51	do
6-1-5hab.	SE NE sec. 15	do	A	29 0	4	N	do	do	N	0 0	1261 3	23 60	4 16 51	do
6-1-5iab.	SE NE sec. 16	do	A	56 1	5	N	Sandstone	Dakota Formation	C <sub>1</sub> H	0 2	1339 6	9 3 51		do
6-1-5jba.	School District	do	D	53 2	6	N	Sandstone	Dakota Formation	C <sub>1</sub> W	0 2	1301 2	25 35	9 2 51	do
6-1-5jbb.	J. O. Lewis	do	D	53 2	6	N	Sandstone	Dakota Formation	C <sub>1</sub> W	0 2	1301 2	25 35	9 2 51	do
6-1-5jcb.	NW NE sec. 17	do	D	63 5	4	N	Sand and gravel	Terrace deposits	N	0 0	1263 0	27 40	4 16 51	Test hole.
6-1-5jdb.	U. S. Geol. Survey	do	D	63 5	4	N	Sand and gravel	Terrace deposits	N	0 0	1263 0	27 40	4 16 51	do
6-1-5jeb.	SE NE sec. 22	do	A	31 0	4	N	Sand	do	N	0 0	1266 3	31 20	4 16 51	Did not reach bedrock.
6-1-5fabd.	NW NE sec. 24	C. Pederson	D	66 0	18	N	Sand and gravel	do	T, H	1	1252 8	23 87	10 25 55	Estimated 1 yard about 100 ym.
6-1-5fabb.	SW NE sec. 24	C. E. Sundgren	D	95 0	18	N	do	do	T, H	1	1251 5	22 00	10 25 55	Estimated 1 yard about 100 ym.
6-1-5faa.	NE NE sec. 25	U. S. Geol. Survey	A	24 0	4	N	Sand	do	N	0 0	1248 9	21 60	4 16 51	Did not reach bedrock.
6-1-5fba.	NE NW sec. 25	do	A	24 0	4	N	do	do	N	0 0	1250 8	21 20	4 16 51	do
6-1-5fbb.	SE NE sec. 26	do	A	29 0	4	N	do	do	N	0 0	1251 1	20 50	4 16 51	do
6-1-5fca.	NE NW sec. 26	do	A	39 0	4	N	Sand and gravel	do	N	0 0	1267 7	36 00	4 16 51	do
6-1-5fcb.	SW NE sec. 26	do	A	39 0	4	N	Clay	Terrace and colluvium	N	0 0	1261 9	20 40	4 19 51	Lower 20 feet penetrated was red clay.
6-1-5fdd.	SE NE sec. 26	do	A	24 0	4	N	Sand	do	N	0 0	1252 4	19 50	4 19 51	Did not reach bedrock.
6-1-5fda.	SE NE sec. 28	do	D	66 6	6	N	Sandstone	Dakota Formation	N	0 3	1317 0	19 92	9 3 51	Also one 1 stack well.
6-1-5fde.	SE NE sec. 29	School District	D	48 6	6	N	do	do	C <sub>1</sub> H	0 7	1371 3	27 50	9 2 51	Did not reach bedrock.
6-1-5fdaa.	SE NE sec. 36	U. S. Geol. Survey	A	29 0	4	N	Sand	Terrace deposits	N	0 0	1250 1	23 60	4 19 51	do
6-2-3ad.	T <sub>1</sub> N <sub>1</sub> R <sub>1</sub> E <sub>1</sub> R <sub>1</sub> sec. 3	F. W. Cox	Du	59 0	51	R	Sandstone	Dakota Formation	C <sub>1</sub> W	0 9	1404 7	43 10	8 20 51	
6-2-3ba.	NE NE sec. 5	Joseph Kuortgen	Du	51 6	40	R	do	do	N	0 6	1312 8	43 62	8 20 51	Did not reach bedrock.
6-2-3bab.	NW NE sec. 19	U. S. Geol. Survey	A	14 0	4	N	Sand	Alluvium	N	0 0	1240 1	9 10	4 20 51	do
6-2-3bba.	NW NE sec. 20	do	A	19 0	4	N	do	Terrace deposits	N	0 0	1247 5	16 80	4 20 51	do
6-2-3bcb.	NW NE sec. 20	do	A	11 0	4	N	do	do	N	0 0	1248 6	9 00	4 20 51	do
6-2-3bcb.	NW NE sec. 20	do	A	11 0	4	N	do	do	N	0 0	1248 6	9 00	4 20 51	do
6-2-3bcb.	NW NE sec. 26	J. P. Stromwall net.	Du	32 7	48	R	Sandstone	Dakota Formation	C <sub>1</sub> W, H	0 4	1316 2	20 92	8 20 51	do

TABLE 10.—Records of wells, springs, and test holes in Clay County—Continued

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet (2)	Diameter of well, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
6-2-28cd	SE SW sec. 28	U. S. Geol. Survey	A	19 0	4	Sand	Terrace deposits	N	N	Land surface	0 0	1246 1	13 80	4-20-54	Did not reach bedrock.
6-2-29ac	SW NE sec. 29	Millies	D	40 5	18	do	Alluvium	Ce, T	I	Top of casing	0 3	1242 8	9 00	10-25-55	Yields about 1000 gpm.
6-2-29dac	NE SE sec. 29	do	D	53 5	18	do	do	Ce, T	I	do	0 3	1242 4	10 00	10-25-55	do
6-2-29dd	SE SE sec. 29	U. S. Geol. Survey	A	9 0	4	do	do	N	N	Land surface	0 0	1239 9	7 60	4-20-54	Did not reach bedrock.
6-2-30cc	SW SW sec. 30	do	A	19 0	4	do	Terrace deposits	N	N	do	0 0	1244 8	18 10	4-19-54	do
6-2-30dc	SW SE sec. 30	do	A	24 0	4	do	do	N	N	do	0 0	1243 5	18 70	4-19-54	do
6-2-31cd	SE SW sec. 31	do	D	48	4	do	do	N	N	do	0 0	1253 8	29 30	6-25-54	Test hole.
6-2-31dc	SW SE sec. 31	do	D	70	4	do	do	N	N	do	0 0	1232 9	18 62	6-22-54	do
6-2-32ab	NW NE sec. 32	do	A	14 0	4	do	Alluvium	N	N	do	0 0	1239 3	9 60	4-20-54	Did not reach bedrock.
6-2-32bbb	NW NW sec. 32	do	A	24 0	4	do	Terrace deposits	N	N	do	0 0	1241 5	18 30	4-19-54	do
6-2-32ccc	SE SW sec. 32	do	D	80	4	do	Alluvium	N	N	do	0 0	1225 6	5 01	6-25-54	Test hole.
6-2-32cd	SE SW sec. 32	do	D	70	4	do	do	N	N	do	0 0	1233 7	6 25	6-23-54	do
6-2-32dd	SE SE sec. 32	do	D	70	4	do	do	N	N	do	0 0	1225 2	7 40	6-28-54	do
6-2-33cd	SE SW sec. 33	do	D	80	4	do	Terrace deposits	N	N	do	0 0	1236 9	21 30	6-24-54	do
6-2-33deb	SW SE sec. 33	Bill Silver	D	69 6	18	Sand and gravel	do	T, NG	I	Hole in pump base	1 5	1241 2	24 20	10-25-55	Yields about 1000 gpm.
6-2-34abb	NW NE sec. 34	U. S. Geol. Survey	A	44 0	4	Clay	Colluvium (?)	N	N	Land surface	0 0	1306 9	36 20	4-20-54	May have reached Dakota Formation.
6-2-34bbb	NW NW sec. 34	do	A	34 0	4	Sand	Terrace deposits	N	N	do	0 0	1258 1	30 00	4-20-54	Did not reach bedrock.
6-2-34cd	SE SW sec. 34	do	D	46	4	do	do	N	N	do	0 0	1239 2	24 50	6-28-54	Test hole.
6-3-2dd	T. 6 S., R. 3 E. SE SE sec. 2	M. Saneman	D	46 7	6	Limestone	Nolans Limestone	Cy, W	S	Top of casing	1 1	1311 9	23 70	8-19-54	
6-3-3cd	SW SW sec. 8	G. Jellum	D	41 4	6	Sandstone	Dakota Formation	Cy, W	S	Base of pump	1 5	1342 0	8 19	10-26-54	
6-3-15cb	NW SW sec. 15	F. J. Doberer	Du	10 4	40	do	do	Cy, W	S	Top of platform	0 0	1321 2	6 82	8-19-54	

6-3-23dc	SW SE sec. 23	Alvena Francon	D	67 7	6	GI	Limestone	Nolans Limestone	Cy. W	N	Base of pump	0 2	1302 6	85 86	8 10 51	Abandoned stuck well.
6-4-4bb	T. S. R. & E. SW NW sec. 4	T. R. Crummins	Du	35 5	48	R	Limestone	Nolans Limestone	Cy. W	N	Base of pump	1 3		28 77	8 16 54	Abandoned stuck well.
6-4-6bb	NW NW sec. 9	A. Boughen	Du	45 2	40	R	do	do	Cy. W	N	do	0 4		21 81	6 16 54	Abandoned stuck well.
6-4-18ba	NE NW sec. 18	R. Johnson	D	76 8	6	GI	do	Nolans and Win- field Limestones	Cy. W	N	do	0 5	1311 0	54 10	8-17 54	
6-4-19cb	NW SW sec. 19	U. S. Geol. Survey	D	52	4	N										Drilled to measure Kytuum lead.
6-4-31da	NE SE sec. 31	F. M. Carrithers	D	63	6	GI	Limestone	Nolans Limestone	Cy. W	N	do	0 2		34 15	8 17 54	
6-4-33ad	SE NE sec. 33	J. Yeager	D	103 2	6	GI	do	Barnston Limestone	Cy. W, H	N	do	0 6		83 60	8 16 51	
7-1-2bb	T. 7 S. R. & E. SW NW sec. 2	School District	D	60 7	8	S	Sand	Terrace deposits	Cy. H	D	Base of pump	0 4	1283 3	21 15	9-3 54	
7-1-6bb	NW NW sec. 6	U. S. Geol. Survey	D	133	4	N	Sandstone	Dakota Formation	Cy. H	D	Land surface	0 0	1300 0			
7-1-8bb	NW NW sec. 8	School District	D	55 2	8	GI	do	do	Cy. H	D	Base of pump	0 4	1351 4	30 00	9 2 51	
7-1-13bb	NW NW sec. 13	A. Hansen	Du, D	43 0	5-36	GI, R	do	do	Cy. W	N	do	0 5	1350 4	45 0	9-30 51	Originally a dug well, has been decayed by drilling.
7-1-15bb	SW NW sec. 15	M. M. Couray	Du, D	65 0	6-36	GI, R	do	do	Cy. W, H	D, S	do	0 8	1330 4	18 72	6 9 54	do
7-1-15bda	SE SE sec. 15	School District	D	31 3	6	GI	do	do	Cy. H	D	do	0 1	1305 9	21 90	9-3 54	
7-1-19bb	SW NW sec. 19	D. B. Moden	Du	50	48	R	do	do	Cy. W	D, S	Land surface	0 0	1298 5	47		
7-1-20bb	SW NW sec. 20	H. Lupton	D	41 9	6	GI	do	do	Cy. H	S	Base of pump	0 6	1372 9	30 98	9 2 51	
7-1-31bb	SE NW sec. 31	C. W. Crawford	Du	34 8	48	R	do	do	Cy. W	S	do	0 8	1341 0	26 52	9-3 51	
7-1-36bb	NW NW sec. 36	A. Darnbacher	D	51 0	6	GI	do	do	Cy. W	D, S	do	0 4	1313 8	30 88	9-9 51	
7-2-3bb	T. 7 S. R. & E. SW NW sec. 3	U. S. Geol. Survey	D	80	4	N	Sand and gravel	Terrace deposits	N	N	Land surface	0 0	1247 9	23 10	6 28 51	Test hole.
7-2-3c	SE NW sec. 3	City of Morganville	D	53	12	S	Gravel	do	T. R	P	do	0 0	1228 3	22		Near water tower
7-2-4dd	SE SE sec. 4	do	D	57	12	S	do	do	T. E	P	do	0 0	1231 4	20		Four blocks west of water tower.
7-2-6bb	NW NW sec. 6	U. S. Geol. Survey	D	140	4	N	Sandstone	Dakota Formation	N	N	do	0 0	1315 0	82 20	10 22 51	Test hole.
7-2-7ab	NW NE sec. 7	do	A	11 0	4	N	Sand	Alluvium	N	N	do	0 0	1224 4	12 10	4 20 51	Did not reach bedrock.
7-2-7ad	SE SE sec. 7	do	A	14 0	4	N	do	do			do	0 0	1221 5	11 50	5 26 51	do
7-2-7de	SW SE sec. 7	do	A	45 0	4	do	do	Terrace deposits			do	0 0	1245 1	42 50	5 26 51	do
7-2-8a	SW NE sec. 8	do	A	14 0	4	N	do	Alluvium			do	0 0	1218 8	12 10	4 20 51	do
7-2-8a-2	SW NE sec. 8	do	A	19 0	4	N	do	do			do	0 0	1217 5	9 80	4 20 51	do
7-2-8a	SE NW sec. 8	do	A	14 0	4	N	do	do			do	0 0	1219 2	10 10	4 20 51	do
7-2-9ab	SW NE sec. 9	do	A	39 0	4	N	do	do			do	0 0	1232 1	18 80	4 20 51	do
7-2-9ad	SE NW sec. 9	do	A	24 0	4	N	do	do			do	0 0	1224 5	17 20	4 20 51	do
7-2-10ab	SE NW sec. 10	do	A	31 0	4	N	do	do			do	0 0	1230 1	22 40	4 20 51	do
7-2-10bb	NW NW sec. 10	do	A	24 0	4	N	do	do			do	0 0	1225 3	17 00	4 20 51	do

TABLE 10.—Records of wells, springs, and test holes in Clay County—Continued

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet (2)	Diameter of well, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet, (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
7-2-11abb.	NW NE sec. 11.	U. S. Geol. Survey	A	29.0	4	N	Sand	Terrace deposits	N	N	Land surface	0.0	1236.6	12.30	Did not reach bedrock.
7-2-14cd.	SE SW sec. 14.	do.	A	29.0	4	N	do.	do.	N	N	do.	0.0	1219.3	19	do
7-2-15dd.	SE SE sec. 15.	do.	A	19.0	4	N	do.	do.	N	N	do.	0.0	1220.2	18.50	do
7-2-15dd.	SE SW sec. 15.	do.	A	23.0	4	N	do.	do.	N	N	do.	0.0	1221.2	22.70	do
7-2-16cd.	SE SW sec. 16.	do.	A	14.0	4	N	do.	do.	N	N	do.	0.0	1212.9	12.00	do
7-2-16dd.	SE SE sec. 16.	do.	A	39.0	4	N	do.	do.	N	N	do.	0.0	1227.9	23.50	do
7-2-18aa.	NE NE sec. 18.	do.	A	30.0	4	N	do.	do.	N	N	do.	0.0	1230.7	22.00	do
7-2-18dd.	SE SE sec. 18.	do.	A	34.0	4	N	do.	do.	N	N	do.	0.0	1233.3	25.00	do
7-2-19bb.	NW NW sec. 19.	E. Affolter	D	44.1	5	GI	Sandstone	Dakota Formation	N	N	Top of casing	1.1	1292.4	31.90	Abandoned stock well.
7-2-21ac.	SW NE sec. 21.	E. H. Eckerman	D	53.0	18	GI	Sand and gravel	Terrace deposits	N	N	do.	0.3	1212.0	10.95	Unused irrigation well.
7-2-21bb.	NW NW sec. 21.	U. S. Geol. Survey	A	24.0	4	N	Sand	do.	N	N	Land surface	0.0	1218.3	14.70	Did not reach bedrock.
7-2-23aa.	NE NE sec. 23.	do.	A	34.0	4	N	do.	do.	N	N	do.	0.0	1227.0	30.30	do
7-2-28dac.	NE SE sec. 28.	Cecil Cole	D	41.0	6	GI	Sand and gravel	do.	Ce, T	I	Top of casing	1.2	1206.4	10.50	A four-wall battery.
7-2-34aa.	NE NE sec. 34.	U. S. Geol. Survey	A	34.0	4	N	Sand	do.	N	N	Land surface	0.0	1214.9	22.20	Did not reach bedrock.
7-2-34ba1.	NE NW sec. 34.	do.	A	28.0	4	N	do.	do.	N	N	do.	0.0	1212.7	19.20	do
7-2-34ba2.	NE NW sec. 34.	do.	A	29.0	4	N	do.	do.	N	N	do.	0.0	1214.4	22.00	do
7-2-35aa.	NE NE sec. 35.	do.	A	29.0	4	N	do.	do.	N	N	do.	0.0	1212.7	23.50	do
7-2-35ab.	NW NE sec. 35.	do.	A	29.0	4	N	do.	do.	N	N	do.	0.0	1214.2	24.20	do
7-2-36aa.	NE NE sec. 36.	do.	A	34.0	4	N	do.	do.	N	N	do.	0.0	1217.5	31.00	do
7-2-36ba.	NE NW sec. 36.	do.	A	24.0	4	N	do.	do.	N	N	do.	0.0	1209.5	22.00	do
7-3-1cc.	T. 7 S., R. 3 E. SW SW sec. 1.	School District	Du	9.5	48	R	Sandstone	Dakota Formation	N	N	Top of platform	1.8	1306.5	6.02	Abandoned.

NE SE sec. 4	G. W. Root	Sp	Shale	Wellington Formation	N	Land surface	1250 0	19 20	10 22 54	Estimated flow of 200 gpm. Test hole. Formerly domestic do
7-3-4da	U. S. Geol. Survey	Du	Sandstone	Dakota Formation	Cy. H	Base of pump	1334 7	11 95	10 26 54	
7-3-4bb	G. H. Hangermoor	Du	do	Wellington	N	Top of platform	1324 5	13 50	8 19 54	
7-3-4cc	W. H. Rundle	Du	Shale	Wellington	N	Base of pump	1291 7	35 75	10 26 54	
7-3-10ad	C. Enquist	D	Limestone	Nolans Limestone	Cy. W	Top of platform	1293 3	35 42	8 19 54	
7-3-22cc	M. Smith	Du	do	Wellington	Cy. W	Base of pump	1300 9	53 63	8 19 54	School is abandoned.
7-3-26cc	School District	D	do	Nolans Limestone	Cy. H	Base of pump	1294 3	39 25	10 26 54	
7-3-26cd	Nicholas Schlitz	D	do	Wellington Fm. and Nolans L.	Cy. W	do	1296 2	26 26	10 28 55	
7-3-31dde	T. Gerrieta	D	Sand and gravel	Terrace deposits	T. T	Top of casing	1205 2			
7-4-10ab	F. F. Harner	D	Limestone	Winfield Limestone	Cy. H	Base of pump	77 40	8 16 54		
7-4-18aa	Geo. Markram	D	do	Nolans L.	Cy. W	do	NS 95	8 17 54		
7-4-20ad	City of Green	D	do	Hargrave Limestone	T. E					Estimated yield 15 kpm. Estimated yield 25 kpm.
7-4-21bc	do	D	do	do	T. E					
7-4-32cc	J. Heilman	D	do	do	Cy. W	Base of pump	112 30	8 17 54		
8-1-4ddbb	P. F. Johnson	D	Sandstone	Dakota Formation	N	Top of casing	1293 5	14 51	9 3 54	Abandoned stork well.
8-1-6bb	Geo. Blackwood	D	do	do	Cy. W	Base of pump	1367 8	20 34	9 2 54	
8-1-7dd	School District	D	do	do	Cy. H	Top of casing	1368 8	30 41	9 2 54	
8-1-7ddc	M. McNeil	D	do	do	Cy. W	do	1325 8	32 48	9 3 54	
8-1-12aa	J. W. Hay	D	do	do	Cy. W	Base of pump	1255 0	22 95	9 30 54	Well reached blue shale at 40 feet.
8-1-13aa	City of Idana	D	Sand	Terrace deposits	J. E		1239 3	22		
8-1-26cc	School District	D	Sandstone	Dakota Formation	Cy. H	Base of pump	1257 2	17 45	9 3 54	School is abandoned.
8-1-30ad	do	D	do	do	N	Top of casing	1352 3	15 90	9 2 54	
8-2-1ab	G. Dittmar	D	Sand and gravel	Terrace deposits	T. G	do	1205 2	23 70	10 26 54	Estimated yield 1500 kpm. Did not reach bedrock
8-2-1de	U. S. Geol. Survey	A	Sand	do	N	Land surface	1204 8	25 60	8 27 54	
8-2-1dd	do	A	do	do	N	do	1201 8	26 40	8 27 54	
8-2-2cc	G. Dittmar	D	Sand and gravel	Alluvium	T. G	Base of pump	1103 3	11 90	9 30 54	

TABLE 10.—Records of wells, springs, and test holes in Clay County—Continued

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet (2)	Diameter of well, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
8-2-41a	NE SE sec. 4	J. B. Kamphaus	D	81.0	6	Limestone	Winfield Limestone	Cy, W	S	Base of pump	1.2	1270.6	87.65	9-30-54	
8-2-5aa	NE NE sec. 5	Eric Swenson	D	76.3	6	do.	do.	Cy, W	S	do.	0.3	1250.1	21.04	9-30-54	
8-2-2cd	SE SW sec. 9	F. N. Schlitz	D	60.9	6	Sand	Terrace deposits	Cy, W	S	do.	0.5	1234.1	26.25	9-30-54	
8-2-10aa1	NE NE sec. 10	U. S. Geol. Survey	A	19.0	4	do.	Alluvium	N	N	Land surface	0.0	1198.2	16.10	5-27-54	
8-2-10aa2	NE NE sec. 10	do.	D	40	4	do.	do.	N	N	do.	0.0	1194.6	11.80	6-30-54	Did not reach bedrock.
8-2-10dd	SE SE sec. 10	do.	A	75.0	4	do.	Terrace deposits	N	N	do.	0.0	1216.1	40.00	6-8-54	Test hole.
8-2-11aa1	NE NE sec. 11	do.	A	29.0	4	do.	do.	N	N	do.	0.0	1205.5	20.10	5-27-54	Hit shale at 74 feet. Did not reach bedrock.
8-2-11aa2	NE NE sec. 11	H. Walker	D	57.0	16	Sand and gravel	do.	T, G	I	Top of casing	1.0	1206.4	25		Estimated yield 1900 gpm.
8-2-11ad	SE NE sec. 11	do.	D	40.0	16	do.	Alluvium	Ce, G	I	do.	1.0	1193.2	12		Estimated yield 600 gpm.
8-2-11da	NE SE sec. 11	do.	D	42.0	16	do.	do.	Ce, G	I	do.	1.0	1193.8	12		do
8-2-23dc	SW SE sec. 23	J. D. Shepherd	Du	58.0	48	Limestone	Wellington Formation	Cy, W	S	Base of pump	0.3	1242.6	42.00	10-21-54	
8-2-27ba	NE NW sec. 27	Leona Sylvester	D	86.7	6	do.	do.	Cy, W	S	do.	0.4	1303.5	81.60	10-21-54	
8-2-30dd	SE SE sec. 30	School District	D	6	6	Sandstone	Dakota Formation	Cy, H	D	do.					High nitrates.
8-2-33dd	SE SE sec. 33	Mathew Hill	D	95.4	6	do.	Winfield Limestone	Cy, W	S	Base of pump	0.6	1291.1	83.60	9-30-54	
8-3-4ab	T. 9 S., R. 5 E.	W. A. Piper	D	118.2	6	do.	Winfield Limestone	Cy, W	S	Base of pump	0.5		78.85	8-19-54	Goes to bedrock. Pumps 120 gpm.
8-3-4bb1	NW NW sec. 4	Swift and Co.	D	65	8	Gravel	Terrace deposits	T, E	Ind.	Land surface			25		Pumps 120 gpm. 24 hours day.
8-3-6ba2	NW NW sec. 8	City of Clay Center	D	55	18	do.	do.	T, E	P				22		North Utility Park well.
8-3-6bb3	NW NW sec. 8	do	D	55	18	do.	do.	T, E	P	Land surface	0.0	1185.9	22		Center Utility Park well 20 ft. draw-down after 4 hrs at 900 gpm.

8-3-80h4...	NW NW sec. 8...	do...	D	55	18	S	do...	do...	T. E.	P	do...	0 0	1187 4	22	South Utility Park well, 14 ft. drawn down after 8 hrs at 500 gpm. Yields about 50 gpm.
8-3-80c...	SW NW sec. 8...	Coca Cola Co...	D	56	7	S	do...	do...	J. E.	Ind.	Top of curb...	0 0	1188 0	26	Yields about 50 gpm.
8-3-80d...	SE NW sec. 8...	City of Clay Center	D	60	16	S	do...	do...	T. E.	P	Land surface	0 0	1187 0	29	Dexter Park well. Reported drawn down of 4 ft. after 8 hrs at 500 gpm.
8-3-80e...	SW SW sec. 8...	U. S. Geol. Survey	A	29	4	N	do...	do...	N	N	do...	0 0	1185 0	26 90	At center of 4th and Main St.
8-3-80b...	NW SE sec. 8...	City of Clay Center	D	53	16	S	Sand and gravel	do...	T. E.	P	do...	0 0	...	28	Atch and McBratney St.
8-3-11dd...	SE SE sec. 11...	Ella Schlitz	D	124 1	6	GI	Limestone	Harneston Formation Alluvium	(Y. W.	S	Base of pump	0 3	...	112 90	8-19-54
8-3-16de...	SE SW sec. 16...	Steinbach...	D	22 2	6	GI	Sand and gravel	do...	(C. B.	I	Top of casing west well	1 0	1181 9	8 50	10-28 55
8-3-17ia...	NE NW sec. 17...	U. S. Geol. Survey	D	44	4	N	do...	Terrace deposits	N	N	Land surface	0 0	1179 3	9 10	Battery of 3 wells. Yields 350 gpm. Wells go to shale.
8-3-17ib...	NW NW sec. 17...	do...	A	14 0	4	N	Sand	Alluvium	N	N	do...	0 0	1179 3	13 20	Test hole. Did not reach bedrock.
8-3-17ic...	SW NW sec. 17...	do...	A	19 0	4	N	do...	do...	N	N	do...	0 0	1179 2	13 00	do
8-3-19id...	SE SE sec. 19...	do...	A	34 0	4	N	Clay	do...	N	N	do...	0 0	1196 7	26 20	do
8-3-21bd...	NW NW sec. 21...	Marshall	D	42 3	12	S	Gravel	Terrace deposits	Ce. T	I	Top of casing	-3 6	1160 7	12 40	Yields about 500 gpm.
8-3-25aa...	NE NE sec. 25...	H. A. Mosburg	D	112 3	6	GI	Limestone	Harneston Limestone	(Y. W. H.	S	Base of pump	0 3	...	92 72	8-19-54
8-3-26ld...	SE NW sec. 26...	U. S. Geol. Survey	A	35 0	4	N	Sand	Terrace deposits	N	N	Land surface	0 0	1185 3	29 80	Did not reach bedrock.
8-3-27ra...	NE NW sec. 27...	do...	A	14 0	4	N	do...	Alluvium	N	N	do...	0 0	1168 4	10 50	do
8-3-27ac...	SE SE sec. 27...	do...	A	19 0	4	N	do...	do...	N	N	do...	0 0	1173 9	15 00	do
8-3-28ac...	SW NE sec. 28...	do...	A	19 0	4	N	do...	Terrace deposits	N	N	do...	0 0	1162 4	15 50	do
8-3-28ie...	SW NW sec. 28...	do...	A	19 0	4	N	do...	do...	N	N	do...	0 0	1162 4	15 50	do
8-3-28ld...	SE NW sec. 28...	Albert Parry	D	45 0	18	GI	Gravel	Alluvium	T. B.	I	Top of casing	2 3	1161 9	8 00	Yields about 720 gpm.
8-3-28da...	NE SE sec. 28...	Norquist...	D	37 6	18	GI	do...	do...	T. B.	I	do...	1 0	1159 4	10 90	Yields about 500 gpm.
8-3-28ld...	SE SE sec. 28...	U. S. Geol. Survey	A	14 0	4	N	Sand	do...	N	N	Land surface	0 0	1159 2	13 20	Did not reach bedrock.
8-3-34cd...	SE NW sec. 34...	do...	A	19 0	4	N	do...	Terrace deposits	N	N	do...	0 0	1168 1	18 40	do
8-3-35aac...	NE NE sec. 35...	Bob Bowers	D	33 9	18	GI	Sand and gravel	do...	T. B.	I	Hole in pump base	0 5	1168 1	12 60	Yields about 350 gpm.
8-3-35da...	NE SE sec. 35...	U. S. Geol. Survey	A	19 0	4	N	Sand	Alluvium	N	N	Land surface	0 0	1164 7	10 10	Did not reach bedrock.
8-3-35a2...	NE SE sec. 35...	do...	D	37	4	N	do...	do...	N	N	do...	0 0	1161 5	6 40	Test hole.
8-3-35ld...	SE SE sec. 35...	do...	D	30	4	N	do...	do...	N	N	do...	0 0	1159 3	6 40	do

TABLE 10.—Records of wells, springs, and test holes in Clay County—Continued

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet (2)	Diameter of well, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
8-3-36hb. 8-3-36bbe.	NW NW sec. 38. NW NW sec. 38.	U. S. Geol. Survey do.	D A	50 31.0	4 4	Sand do.	Terrace deposits. do.	N N	N N	Land surface do.	0.0 0.0	1181.9 1182.5	22.00 26.20	7-12-54 5-27-54	Test hole. Did not reach bedrock.
8-4-4dd.	T. 8 S., R. 4 E. SE SE sec. 4.	School District	D	132.5	6	Limestone	Barnston Limestone	Cy. H	D	Base of pump	0.3		85.30	8-10-54	
8-4-15dc. 8-4-17cd. 8-4-20ab. 8-4-21ac.	SW SE sec. 15. SE SW sec. 17. NW NE sec. 20. SW NE sec. 21.	Nellie Senn. Baxter. Samuel Goodin. H. Mall.	D D D D	118.3 130 100 62	6 12 12 12	do. do. do. do.	do. do. do. do.	Cy. W T. B T. C T. T	S I I I	do. Land surface Base of pump do.	0.1 0.0 0.1 0.1	1276.8 1217.4 1223.7	61.62 55.90	8-17-54 10-28-55	Yields 50 gpm. Yields 200 gpm. Flowed when drilled, yields 290 gpm. Yields 125 gpm.
8-4-21dc. 8-4-34ba.	SW SE sec. 21. NW SW sec. 34.	do. Robt. Lloyd.	D D	72.0 87.3	12 6	do. do.	do. do.	T. T Cy. W	I S	do. do.	0.1 1.0	1220.4	14.90 63.42	10-28-55 10-26-54	
9-1-1dd. 9-1-4dd. 9-1-7cd. 9-1-26bb. 9-1-27ba. 9-1-32bb.	T. 9 S., R. 1 E. SE SE sec. 1. SE SE sec. 4. SW SE sec. 7. NW NW sec. 26. NW NW sec. 27. NW NW sec. 32.	Ernest Landin. O. Sterrett. Abigail Bull. School District. Mathew Hill. O. M. Panton.	D Du D Du Du Du	89.8 41.7 64.0 15.0 46 49.0 50.2	6 48 6 46 56 30	Sandstone do. do. do. do. do.	Dakota Formation do. do. do. do. do.	Cy. W Cy. W Cy. W Cy. H Cy. H Cy. N	S S S D S N	Base of pump do. do. do. Top of curb. do.	0.8 1.6 1.0 0.1 0.8 0.5	1372.1 1418.2 1319.7 1302.1 1361.7 1366.0	62.40 19.77 19.32 11.00 30.51 42.25	9-30-54 9-3-54 9-2-54 9-3-54 9-3-54 9-2-54	
9-2-11cb. 9-2-16ab. 9-2-17bb. 9-2-24cc.	T. 9 S., R. 2 E. NW NW sec. 11. NW NE sec. 16. NW NW sec. 17. SW SW sec. 24.	School District. U. S. Geol. Survey Fed. Land Bank. Geo. Lenhart.	D A Du D	70.1 50.0 61.0 75.7	6 4 40 6	Limestone Sandstone do. (f)	Nolan Limestone Dakota Formation do. Wellington Formation	Cy. H Cy. W Cy. W	D N S	Base of pump Land surface Base of pump do.	0.2 0.0 1.3 0.3	1323.3 1392.8	46.00 37.00 47.20 43.18	9-30-54 6-7-54 9-30-54 10-21-51	Wellington shale at 38 feet.



9-2-300b 9-2-33dd	NW NW sec. 30. SE SE sec. 33	J. C. Lloyd F. H. Hughes	74 0	6	GI	Sandstone Limestone	Dakota Formation Noddy Limestone	Cy, W	z, z	Land surface Base of pump	0 0 0 7	1365 9	10 40	9 30 34	Flow 2.5 gpm.
9-3-1ba	T. 9 S. R. 3 E. NE NW sec. 1	Wynn Bauer	38	11	GI	Gravel	Terrace deposits	Cy, R	I	Top of casing	0 4	1161 8			Yields about 150 gpm Did not reach bedrock
9-3-1ebb	NW NW sec. 1		19 0	4	N	Sand	Aluminum	N	N	Land surface	0 0	1166 7	18 20	5 28 34	
9-3-1ec	SW SW sec. 1 NE NE sec. 2	Fred Fox U. S. Geol. Survey	93 0 14 0	6 4	GI N	Limestone Sand	Barnston Aluminum	Cy, W N	N	Top of casing Land surface	0 9 0 0	1220 9 1150 3	53 14 11 00	10 21 34 5 27 34	Did not reach bedrock
9-3-21ba	NW NW sec. 2	do	19 0	4	N	do	do	N	N	do	0 0	1161 7	14 00	5 27 34	do
9-3-21eb	SE SW sec. 13	do	30 0	4	N	do	Terrace deposits	N	N	do	0 0	1157 7	34 20	5 28 34	do
9-3-17aab	SE NE sec. 17	J. V. Yarrow	70 0	6	GI	Limestone	Wells of Limestone	Cy, W	N	Base of pump	1 0	1258 7	49 30	10 21 34	do
9-3-20ec	SW NW sec. 20	School District	78 5	6	GI	(?)	Wells of Limestone	Cy, H	D	do	0 6	1258 7	62 30	6 9 34	do
9-3-23ec	SW SW sec. 23	H. B. Runcie	99 5	6	GI	Limestone	Barnston Limestone	Cy, W	N	do	1 2		70 97	10 21 34	
9-3-31ec	SW SW sec. 31	H. E. McDonald	92 2	6	GI	do	Wells of Limestone	Cy, W	N	do	0 3		5 50	10 21 34	
9-4-61bb	T. 9 S. R. 4 E. NW NW sec. 6	Wynn Bauer	47	14	GI	Gravel	Terrace deposits	T, B	I	Top of casing	0 8	1175 2			Yields about 300 gpm
9-4-18aa	NE NE sec. 18	School District	82 7	6	GI	Limestone	Barnston Limestone	Cy, H	D	Base of pump	0 1	1222 3	65 01	8 17 34	
9-4-18abb	NW NE sec. 18	U. S. Geol. Survey	11 0	4	N	Sand	Terrace deposits	N	N	Land surface	0 0	1151 5	12 10	5 28 34	Did not reach bedrock
9-4-21aa	NE NE sec. 21	Eng. Elking	114 4	6	GI	Limestone	Barnston Limestone	Cy, W	N	Base of pump	1 1		74 00	8 17 34	
9-4-29ac	SW NE sec. 29	U. S. Geol. Survey	41	4	N	Sand and gravel	Aluminum	N	N	Land surface	0 0	1110 2			Test hole.
9-4-29ba	SW NW sec. 29	do	58	4	N	do	Terrace deposits	N	N	do	0 3	1164 0	20 40	5 12 34	do
9-4-29bc	SW NW sec. 29	do	34 0	4	N	Sand	Aluminum	N	N	do	0 0	1170 1	25 20	5 28 34	do
9-4-29bd	SE NW sec. 29	do	34	4	N	do	do	N	N	do	0 0	1152 2	18 20	7 12 34	Test hole.
9-4-30dd	SE SE sec. 30	Wm. Avery		18	S	do	Terrace deposits	T, G	I	do					Test hole.
9-4-31dbb	NW SE sec. 31	U. S. Geol. Survey	44 0	4	N	do	do	N	N	Land surface	0 0	1162 5	31 30	5 28 34	do
9-4-32adb	SE SE sec. 32	do	11 0	4	N	do	Aluminum	N	N	do	0 0	1136 2	11 30	5 28 34	do
9-4-32adb	SE NE sec. 32	do	40	4	N	Sand and gravel	Terrace deposits	N	N	do	0 0	1136 0	11 50	7 12 34	Test hole.
9-4-32dba	NW SE sec. 32	do	14 0	4	N	Sand	Aluminum	N	N	do	0 0	1136 9	13 50	5 28 34	Did not reach bedrock.
9-4-32deb	SW SE sec. 32	do	14 0	4	N	do	do	N	N	do	0 0	1134 2	12 20	5 28 34	do
9-4-33add	SE NE sec. 33	do	20 0	4	N	do	Terrace deposits	N	N	do	0 0	1118 1	20 40	5 28 34	do
9-4-33dbb	NW SE sec. 33	do	14 0	4	N	do	do	N	N	do	0 0	1136 7	8 60	5 28 34	do

TABLE 10.—Records of wells, springs, and test holes in Clay County.—Concluded

Well number	Location	Owner or tenant	Type of well (1)	Depth of well, feet (2)	Diam. of casing, inches (3)	Principal water-bearing bed		Method of lift (4)	Use of water (5)	Measuring point			Depth to water level below land surface, feet (6)	Date of measurement	REMARKS (Yield given in gallons a minute; drawdown in feet)
						Character of material	Geologic source			Description	Distance above land surface, feet	Height above mean sea level, feet			
T. 10 S., R. 1 E. NE SE sec. 1. SW SW sec. 3.	School District. do.	D	47.4	6	CI	Sandstone (7).	Dakota Formation Wellington	Cy, H N	N	Base of pump Top of casing	0.4 0.1	1288.3 1280.5	30.85 21.80	9-30-54 9-3-54	School abandoned. do
10-1-3cc.		D	39.0	6	CI										
10-1-5chb.	NW SW sec. 5.	Du	16.2	48	R	Sand	Terrace deposits	Cy, W Cy, E	S	Base of pump	1.0	1277.8	9.53	9-2-54	East well.
*10-1-17de1.	SW SE sec. 17.	D	100	8	S	Sandstone	Dakota Formation	Cy, E L, E	P	Land surface.	0.0	1378.3			West well, yields 100 gpm.
10-1-17de2.	SW SE sec. 17.	D	110	8	S	do.	do.			do.	0.0	1392.5			
10-1-22bha.	NW NW sec. 22.	D	99.9	6	S	do.	do.	Cy, W	S	Base of pump	0.6	1330.5	41.88	9-3-54	Abandoned domestic well.
10-1-29bc.	SW NW sec. 29.	Sp				do.	do.		S	Land surface.	0.0	1297.1			
10-1-30cbe.	NW SW sec. 30.	Du	42.3	48	R	do.	do.	N	N	Top of platform	0.3	1403.7	42.00	9-2-54	
T. 10 S., R. 2 E. SW SW sec. 12. NE NE sec. 17.	F. Roderick. Henry Youse	Du	48.7	36	R	Limestone	Nolans Limestone Wellington	Cy, W Cy, W	S	Base of pump	0.3		48.40	9-30-54	Abandoned stock well.
10-2-12cc.		Du	37.3	48	R	do.			N	do.	0.8	30.90	30.90	9-30-54	
10-2-17aa1.	NE NE sec. 17.	A	15.0	4	N	Clay	Terrace deposits	N	N	Land surface.	0.0	1213.7	7.20	6-8-54	Did not reach bedrock.
10-2-17aa2.	NE NE sec. 17.	A	15.0	4	N	do.	do.	N	N	do.	0.0	1207.3	9.20	6-8-54	Did not reach bedrock.
10-2-17cc.	SW SW sec. 17.	A	14.0	4	N	do.	do.	N	N	do.	0.0	1207.3	9.20	6-8-54	Did not reach bedrock.
*10-2-17cd1.	SE SW sec. 17.	D	55.0	8	S	Sand.	do.	Cy, W N	S	Base of pump	1.0	1209.6	12.50	6-9-54	Did not reach bedrock.
10-2-17cd2.	SE SW sec. 17.	A	19.0	4	N	do.	do.		N	Land surface.	0.0	1206.8	11.20	6-8-54	Did not reach bedrock.
10-2-18ads.	SE NE sec. 18.	A	19.0	4	N	Clay.	do.	N	N	do.	0.0	1213.3	9.40	6-8-54	do
10-2-20ba.	NE NE sec. 20.	A	19.0	4	N	Sand.	do.	N	N	do.	0.0	1203.7	16.00	6-8-54	do
*10-2-23bb.	NW NW sec. 23.	D	65.0	6	CI	Limestone	Nolans Limestone	Cy, H	D	Base of pump	0.6	49.90	49.90	6-9-54	
10-2-27ad.	SE NE sec. 27.	D	51.0	6	CI	do.	Winfield Limestone	Cy, W	S	do.	0.2	34.15	34.15	9-30-54	
10-2-31cc.	SW SW sec. 31.	D	65.4	6	CI	do. (7).	Wellington Formation	Cy, W	S	do.	0.2	31.83	31.83	9-30-54	
10-2-31aa.	NE NE sec. 31.	A	19.0	4	N	Sand.	Terrace deposits	N	N	Land surface.	0.0	1192.3	17.30	6-8-54	Did not reach bedrock.

[illegible]

\* Indicates a chemical analysis is given.

1. A, Auger hole; D, Drilled; Du, Dug; Sp, Spring.
2. Reported depths given in feet; measured depths given in feet and tenths.
3. GI, Galvanized iron; N, None; R, Rock; S, Steel.
4. Type of pump: C, Centrifugal; Cy, Cylinder; J, Jet; N, None; T, Turbine.
5. Type of power: B, Butane engine; E, Electric motor; G, Gasoline engine; H, Hand; N, None; NG, Natural gas engine; T, Tractor; W, Wind.
6. D, Domestic; I, Irrigation; Ind., Industrial; N, None; P, Public supply; S, Stock.
8. Measured depths to water level are given in feet, tenths, and hundredths; reported depths to water level are given in feet.

## LOGS OF TEST HOLES

On the following pages are given the logs of 28 test holes drilled in Clay County (Pl. 2). The holes were drilled chiefly in areas of thick alluvial deposits, but several were drilled to determine the character, thickness, and water-bearing properties of the Dakota Formation. One test hole was drilled through the gypsum deposits in the northeastern part of the county. The geologic cross sections shown in Plate 3 are based principally on data obtained from test-hole logs. Many holes were drilled with a power auger to determine the depth to water level or as a guide in preparing the geologic map. Logs of these auger holes are not given, as most of them were very shallow. The test holes were drilled by the State Geological Survey. Samples were collected and studied in the field and later examined microscopically in the laboratory.

6-1-2bac.—*Drillers log of test hole in SW¼ NE¼ sec. 2, T. 6 S., R. 1 E. Near the site of Clifton city wells. Static water level 21 feet below land surface. Drilled by Layne-Western Co.*

	Thickness, feet	Depth, feet
Soil .....	4	4
Clay .....	24	28
Sand, fine, gray .....	2	30
Sand, coarse, gray .....	3	33
Sand and gravel, gray .....	10	43
Clay .....	1	44
Sand, fine .....	2	46
Sand, coarse, gray, and gravel on shale .....	16	62

6-1-2bb.—*Sample log of test hole in NW¼ NW¼ sec. 2, T. 6 S., R. 1 E. On east side of road south of Vining, 0.2 mile south of section corner. Drilled June 17, 1954. Surface altitude, 1,272.0 feet.*

## QUATERNARY—Pleistocene

## Wisconsinan Stage—Terrace deposits

	Thickness, feet	Depth, feet
Silt, black .....	3	3
Silt, tan .....	3	6
Clay, sticky, tan to gray .....	7	13
Clay, slightly sandy, dark gray .....	7	20
Clay, sandy, soft, light gray .....	3	23
Sand, fine to coarse, and fine to medium gravel .....	14	37
Clay, greenish gray .....	23	60

## PERMIAN—Leonardian

## Wellington Formation

Dolomite, light gray .....	1	70
----------------------------	---	----

**6-1-2c.**—Sample log of test hole near SW cor. sec. 2, T. 6 S., R. 1 E. On east side of road, 200 feet north of section corner. Drilled June 17, 1954. Surface altitude, 1,256.8 feet; depth to water, 7.10 feet, June 18, 1954.

	Thickness, feet	Depth, feet
<b>QUATERNARY—Pleistocene</b>		
Recent and Wisconsinan Stages—Alluvium and terrace deposits		
Silt, black	3	3
Sand, fine to coarse, and fine to medium gravel	13	16
Clay, blue gray	4	20
Gravel, medium, and coarse arkosic sand	37	57
Kansan Stage—unnamed formation		
Sand, medium to coarse, and fine to medium limestone and arkosic gravel	6	63
Gravel, fine to medium; mostly sandstone and limestone pebbles	4	67
<b>PERMIAN—Leonardian</b>		
Wellington Formation		
Shale, platy, black and gray	3	70

**6-1-11b.**—Sample log of test hole in SW¼ NW¼ sec. 11, T. 6 S., R. 1 E. On east side of road 0.3 mile south of section corner, at north end of row of large cottonwood trees. Drilled June 18, 1954. Surface altitude, 1,258.3 feet.

	Thickness, feet	Depth, feet
<b>QUATERNARY—Pleistocene</b>		
Recent and Wisconsinan Stages—Alluvium and terrace deposits		
Silt, black	2	2
Silt, tan	3	5
Sand, fine to coarse, and fine to medium arkosic gravel.	12	17
Clay, sandy, blue	3	20
Sand, fine to coarse, and fine to medium arkosic gravel.	39	59
Kansan Stage—unnamed formation		
Clay, yellow	1	60
Gravel, fine to medium; many sandstone and limestone pebbles	8	68
Clay, yellow; contains some sandstone and limestone gravel	1	69
<b>PERMIAN—Leonardian</b>		
Wellington Formation		
Shale, platy, blue black	1	70

**6-1-14bb.**—Sample log of test hole in NW¼ NW¼ sec. 14, T. 6 S., R. 1 E. On east side of road, 25 feet south of point where road turns west. Drilled June 18, 1954. Surface altitude, 1,267.0 feet.

	Thickness, feet	Depth, feet
<b>QUATERNARY—Pleistocene</b>		
Recent Stage—Dune sand		
Sand, very fine	10	10
Recent and Wisconsinan Stages—Alluvium and terrace deposits		
Silt, light tan, very soft	2	12
Clay, gray	3	15

	Thickness, feet	Depth, feet
Silt, black .....	3	18
Silt, light tan .....	8	26
Sand, very fine .....	4	30
Gravel, medium to coarse, arkosic, and coarse sand ..	26	56
Sand and gravel, arkosic, mixed with green clay .....	4	60
Gravel, fine to medium, arkosic, and fine to coarse sand .....	10	70
Kausan Stage—unnamed formation		
Gravel, fine to medium, chiefly limestone and sandstone pebbles, and coarse sand .....	6	76
PERMIAN—Leonardian		
Wellington Formation		
Shale, platy, blue black .....	1	77
6-1-15da.—Sample log of test hole in NE¼ SE¼ sec. 15, T. 6 S., R. 1 E. On west side of road, about 250 feet north of quarter-mile hedge row. Drilled June 18, 1954. Surface altitude, 1,261.2 feet; depth to water, 22.00 feet June 18, 1954.		
QUATERNARY—Pleistocene		
Wisconsinan Stage—Terrace deposits		
Clay and silt, black .....	2	2
Clay, silty, tan .....	3	5
Clay, tough, black .....	2	7
Silt, sandy, tan .....	13	20
Sand, fine to coarse, arkosic, and fine gravel .....	10	30
Gravel, fine to medium, arkosic, and fine to coarse sand .....	30	60
PERMIAN—Leonardian		
Wellington Formation		
Limestone, gray .....	3	63
6-1-22aad.—Sample log of test hole in NE¼ NE¼ sec. 22, T. 6 S., R. 1 E. On west side of road, midway between abandoned farm house on east and house on west. Drilled June 22, 1954. Surface altitude, 1,263.0 feet; depth to water, 27.40 feet June 25, 1954.		
QUATERNARY—Pleistocene		
Wisconsinan Stage—Terrace deposits		
Silt, clayey, black .....	2	2
Silt, tan .....	6	8
Clay, gray .....	10	18
Clay, very sandy, light gray .....	3	21
Clay, sandy, pinkish tan .....	4	25
Sand, fine to coarse, and fine to medium gravel .....	35	60
Sand, fine to coarse, fine to medium gravel, and yellow clay .....	3	63
PERMIAN—Leonardian		
Wellington Formation		
Limestone, hard, dark gray .....	0.5	63.5

6-2-31cd.—Sample log of test hole in SE¼ SW¼ sec. 31, T. 6 S., R. 2 E. On north side of road 15 feet west of drive to house on hill south of road. Drilled June 22, 1954. Surface altitude, 1,253.8 feet; depth to water, 29.30 feet June 25, 1954.

## QUATERNARY—Pleistocene

Wisconsinan Stage—Terrace deposits	Thickness, feet	Depth, feet
Silt, black	2	2
Silt, sandy, gray to tan	9	11
Clay, silty; contains some sand and ironstone	15	26
Sand, fine	7	33
Clay, sandy, tan	3	36
Sand, fine to coarse	8	44
Clay, yellow	3	47

## PERMIAN—Leonardian

## Wellington Formation

Shale, or soft limestone, gray to black	1	48
---	---	----

6-2-31dc.—Sample log of test hole in SW¼ SE¼ sec. 31, T. 6 S., R. 2 E. On north side of road about 500 feet east of drive to house on north side of road. Drilled June 22, 1954. Surface altitude, 1,232.9 feet; depth to water, 18.62 feet June 22, 1954.

## QUATERNARY—Pleistocene

Wisconsinan Stage—Terrace deposits	Thickness, feet	Depth, feet
Silt, black	7	7
Silt, sandy, tan	5	12
Clay, blue gray	3	15
Sand, fine to coarse, and fine to medium arkosic gravel	29	44
Clay, greenish gray	2	46
Sand, fine to coarse, and fine to medium gravel	14	60
Sand, fine to medium, arkosic	5	65

## PERMIAN—Leonardian

## Wellington Formation

Shale, dark gray, grades downward into harder shale and limestone	5	70
---	---	----

6-2-32ccc.—Sample log of test hole in SW cor. sec. 32, T. 6 S., R. 2 E. In center of old roadbed, 35 feet north of section corner. Drilled June 22, 1954. Surface altitude, 1,225.6 feet; depth to water, 5.01 feet June 25, 1954.

## QUATERNARY—Pleistocene

Recent and Wisconsinan Stages—Alluvium and terrace deposits	Thickness, feet	Depth, feet
Silt, tan	2	2
Sand, fine to coarse, and fine to medium arkosic gravel	48	50
Sand, fine to medium; contains some green clay and sandstone gravel	10	60
Kansan Stage—unnamed formation		
Sand, fine to medium; contains much locally derived gravel and shale	9	69

## PERMIAN—Leonardian

## Wellington Formation

Shale, black	11	80
--------------	----	----

6-2-32cd.—Sample log of test hole in SE¼ SW¼ sec. 32, T. 6 S., R. 2 E. At end of trail leading east along section line toward Republican River. Drilled June 23, 1954. Surface altitude, 1,233.7 feet.

	Thickness, feet	Depth feet
QUATERNARY—Pleistocene		
Recent and Wisconsinan Stages—Alluvium and terrace deposits		
Silt, black	2	2
Silt, tan	4	6
Sand, fine to medium	4	10
Sand, fine to coarse, and fine to medium arkosic gravel,	29	39
Clay, blocky, green	10	49
Sand and gravel, fine to medium	12	61
Clay, silty and sandy, dark gray	2	63
Kansan Stage—unnamed formation		
Gravel, fine to medium, mostly locally derived; some thin clay streaks	6	69
PERMIAN—Leonardian		
Wellington Formation		
Shale, micaceous, sandy, light gray	1	70

6-2-32dd.—Sample log of test hole in SE¼ SE¼ sec. 32, T. 6 S., R. 2 E. On north side of road, 175 feet east of creek bridge. Drilled June 23, 1954. Surface altitude, 1,225.2 feet; depth to water, 7.40 feet June 28, 1954.

	Thickness, feet	Depth feet
QUATERNARY—Pleistocene		
Recent and Wisconsinan Stages—Alluvium and terrace deposits		
Silt, black	3	3
Silt, tan	6	9
Silt, sandy, black	5	14
Sand, fine to coarse, and fine to medium arkosic gravel,	36	50
Clay, tan to gray	4	54
Kansan Stage—unnamed formation		
Gravel, locally derived, fine to medium; some yellow clay	12	66
PERMIAN—Leonardian		
Wellington Formation		
Shale, blue gray	4	70

6-2-33cd.—Sample log of test hole in SE¼ SW¼ sec. 33, T. 6 S., R. 2 E. On south side of road, 40 feet east of railroad track. Drilled June 24, 1954. Surface altitude, 1,236.9 feet; depth to water, 21.30 feet June 24, 1954.

	Thickness, feet	Depth feet
QUATERNARY—Pleistocene		
Wisconsinan Stage—Terrace deposits		
Silt, black	2	2
Silt, tan	5	7
Silt, sandy, tan; contains snail shells	8	15
Sand, fine to medium, arkosic	19	34
Sand, medium to coarse, and fine to medium arkosic gravel	36	70



Kansan Stage—unnamed formation	Thickness, feet	Depth, feet
Sand, fine to coarse, mostly locally derived	5	75
PERMIAN—Leonardian		
Wellington Formation		
Shale, blocky, light gray	5	80
6-2-34cd.—Sample log of test hole in SE cor. SW¼ sec. 34, T. 6 S., R. 2 E. On north side of road, 100 feet west of bridge across drainage ditch. Drilled June 22, 1954. Surface altitude, 1,239.2 feet; depth to water, 24.50 feet June 28, 1954.		
QUATERNARY—Pleistocene		
Wisconsinan Stage—Terrace deposits	Thickness, feet	Depth, feet
Silt, black	2	2
Silt, tan	9	11
Clay, hard, gray	3	14
Clay, sandy, tan	14	28
Sand, fine to coarse, and fine arkosic gravel	16	44
PERMIAN—Leonardian		
Wellington Formation		
Shale, slightly calcareous, blue gray and tan	2	46
6-4-19cb.—Sample log of test hole in NW¼ SW¼ sec. 19, T. 6 S., R. 4 E. On top of second hill north of corner, west of bend in creek where creek is nearest to road. Drilled October 14, 1954.		
PERMIAN—Leonardian		
Wellington Formation	Thickness, feet	Depth, feet
Shale, greenish buff; contains some thin dolomitic streaks	4	4
Shale, noncalcareous, yellowish green	3	7
Shale, noncalcareous, bright green	1	8
Shale, silty, noncalcareous, chocolate brown	6.5	14.5
Shale, mottled red brown and green	2.5	17
Shale, silty, noncalcareous, red brown	1	18
Shale, greenish gray	3	21
Shale, noncalcareous, light gray	1	22
Shale, noncalcareous, greenish gray	3.5	25.5
Shale, noncalcareous, red brown	1	26.5
Shale, noncalcareous, greenish gray	1.5	28
Shale, silty, noncalcareous, red brown	1	29
Shale, noncalcareous, green; contains some gypsum stringers	2.5	31.5
Shale, platy, greenish gray	1.5	33
Gypsum	1	34
Shale, green	1.5	35.5
Shale, greenish gray; contains gypsum	1	36.5
Gypsum; contains 6-inch shale layer at 38.5 to 39	3.5	40
Gypsum, very clean	8	48
Gypsum, shaly	0.5	48.5
Gypsum	0.5	49
PERMIAN—Wolfcampian		
Nolans Limestone—Herington Limestone member		
Limestone, hard, dolomitic	3	52

7-1-6bb.—Sample log of test hole in NW cor. sec. 6, T. 7 S., R. 1 E. About 60 feet east and 8 feet south of section corner. Drilled October 7, 1954. Surface altitude, 1,390.0 feet.

## QUATERNARY—Pleistocene

## Wisconsinan Stage—Peoria Formation

	Thickness, feet	Depth, feet
Silt, dark gray to brown	2	2
Silt, tan	2	4
Clay, buff; contains a few ironstone pebbles	5	9
Clay, sandy, brown to gray	2	11

## CRETACEOUS—Gulfian

## Dakota Formation

Sandstone, fine grained, brown	13.5	24.5
Clay, light gray to brown	4.5	29
Clay, sandy, buff to brown	16	45
Clay, sandy, green gray	4	49
Clay, sandy, red brown to buff	5	54
Clay, greenish gray	5	59
Clay and sandstone	5	64
Shale, clayey, dark gray	10	74
Sandstone, very hard; contains pyrite	3	77
Shale, clayey, sandy, dark gray	5	82
Shale, clayey, sandy, light gray	9.5	91.5
Clay, white, and sandstone	3.5	95
Shale, clayey, dark gray	3	98
Lignite	3	101
Shale, clayey, sandy, gray	27	128

## PERMIAN—Leonardian

## Wellington Formation

Shale, calcareous, very hard, gray, interbedded with limestone	5	133
--	---	-----

7-2-3bb.—Sample log of test hole in NW cor. sec. 3, T. 7 S., R. 2 E. In edge of field south of road, 40 feet east of section corner. Drilled June 25, 1954. Surface altitude, 1,237.9 feet; depth to water, 23.10 feet June 28, 1954.

## QUATERNARY—Pleistocene

## Wisconsinan Stage—Terrace deposits

	Thickness, feet	Depth, feet
Silt, black	3	3
Silt, tan	8	11
Clay, compact, tan	5	16
Clay, compact, dark gray	2	18
Clay, sandy, tan	6	24
Sand, fine to coarse, and fine to medium arkosic gravel,	23	47
Clay	2	49
Sand, fine to coarse, and fine to medium arkosic gravel,	8	57
Clay, green	4	61
Gravel, fine to medium, arkosic	8.5	69.5

## PERMIAN—Leonardian

## Wellington Formation

Shale, dark gray	10.5	80
------------------	------	----

7-2-6bb.—Sample log of test hole in NW¼ NW¼ sec. 6, T. 7 S., R. 2 E. About 25 feet west of west side of old school house foundation. Drilled October 13, 1954. Surface altitude, 1,315.0 feet; depth to water, 82.20 feet October 22, 1954.

## QUATERNARY—Pleistocene

## Illinoian Stage—Loveland Formation

	Thickness, feet	Depth, feet
Clay, sandy, reddish tan	4	4
Clay, sandy, buff	11	15
Clay, sandy, yellow	9	24

## CRETACEOUS—Gulfian

## Dakota Formation

Sandstone, very fine grained, loosely cemented, white to yellow	26	50
Sandstone, or sand, fine, brown; contains some mica and ironstone	38	88

## PERMIAN—Leonardian

## Wellington Formation

Clay, light gray	5	93
Shale, hard, platy, somewhat calcareous, dark greenish gray	9	102
Shale, light greenish gray	11	113
Shale, hard, platy, dark greenish gray	5.5	118.5
Shale, hard, platy, very dark gray to black	13.5	132
Shale, platy, alternately hard and soft, very dark gray to black	8	140

7-3-5bb.—Sample log of test hole near NW cor. sec. 5, T. 7 S., R. 3 E. About 130 feet east of highway and 12 feet south of center of road. Drilled October 14, 1954. Surface altitude, 1,333.7 feet; depth to water, 19.20 feet October 22, 1954.

## CRETACEOUS—Gulfian

## Dakota Formation

	Thickness, feet	Depth, feet
Clay, sandy, tan to gray	4	4
Clay, sandy, red brown	15	19
Clay, sandy, red and gray	11	30
Clay, sandy, black and gray; contains some lignite	5	35
Clay, very sandy, lignite streaks	10.5	45.5

## PERMIAN—Leonardian

## Wellington Formation

Shale, hard, platy, gray	2.5	48
Shale, black	5	53
Shale, dark gray	4	57
Limestone, hard	1	58

8-2-10aa.—Sample log of test hole in NE¼ NE¼ sec. 10, T. 8 S., R. 2 E. On west side of road, about 175 feet south of culvert. Drilled June 28, 1954. Surface altitude, 1,194.6 feet; depth to water, 11.80 feet June 30, 1954.

## QUATERNARY—Pleistocene

## Recent Stage—Alluvium

	Thickness, feet	Depth, feet
Silt and clay, tan	5	5
Silt, black	1	6

	Thickness, feet	Depth, feet
Silt, tan .....	4	10
Sand, fine to coarse, and fine to medium arkosic gravel, .....	10	20
Gravel, medium to coarse, arkosic .....	8	28
PERMIAN—Leonardian		
Wellington Formation		
Shale, blocky, blue gray .....	12	40
8-3-17ba.—Sample log of test hole in NE¼ NW¼ sec. 17, T. 8 S., R. 3 E. In east borrow pit, 20 feet south of entrance to C. E. Mullen farm. Drilled June 28, 1954. Surface altitude, 1,179.3 feet; depth to water, 9.10 feet June 30, 1954.		
QUATERNARY—Pleistocene		
Wisconsinan Stage—Terrace deposits		
Silt, brown .....	6	6
Sand, fine to coarse, and fine to medium arkosic gravel, .....	24	30
Sand, fine to coarse, and fine to arkosic gravel .....	12	42
PERMIAN—Wolfcampian		
Nolans Limestone		
Limestone, trace of chert, yellow to gray .....	2	44
8-3-35da.—Sample log of test hole in NE¼ SE¼ sec. 35, T. 8 S., R. 3 E. In west borrow pit. Drilled June 29, 1954. Surface altitude, 1,161.5 feet; depth to water, 6.40 feet June 29, 1954.		
QUATERNARY—Pleistocene		
Recent Stage—Alluvium		
Sand, fine .....	14	14
Sand, fine to coarse, and fine gravel .....	5	19
Sand, medium to coarse, and fine to coarse arkosic gravel .....	10.5	29.5
PERMIAN—Wolfcampian		
Doyle Shale		
Shale, red and gray .....	5.5	35
Shale, limy, white .....	1	36
Limestone, hard .....	1	37
8-3-35dd.—Sample log of test hole in SE¼ SE¼ sec. 35, T. 8 S., R. 3 E. On south side of road, 40 feet west of center of old black-top road. Drilled June 29, 1954. Surface altitude, 1,159.3 feet.		
QUATERNARY—Pleistocene		
Recent Stage—Alluvium		
Silt, black .....	2	2
Silt, tan .....	3	5
Sand, fine to coarse .....	7	12
Sand, fine to coarse, and fine to medium arkosic gravel .....	15	27
PERMIAN—Wolfcampian		
Doyle Shale		
Shale, chalky, red and green .....	3	30

8-3-36bb.—Sample log of test hole near NW cor. sec. 36, T. 8 S., R. 3 E. On east side of road across from Broughton store and service station. Drilled June 29, 1954. Surface altitude, 1,181.9 feet; depth to water, 22.00 feet July 12, 1954.

## QUATERNARY—Pleistocene

Wisconsinan Stage—Terrace deposits	Thickness, feet	Depth, feet
Silt, brown	3	3
Silt, sandy, black	2	5
Clay, brown to tan	6	11
Clay, sandy, tan	11	22
Sand, fine, and light-gray clay	8	30
Sand, fine to coarse, and fine to medium arkosic gravel	18	48

## PERMIAN—Wolfcampian

Doyle Shale		
Limestone, brown	2	50

9-4-29ac.—Sample log of test hole in SW¼ NE¼ sec. 29, T. 9 S., R. 4 E. South of fence, 40 feet west, 13 feet south of power pole. Drilled June 30, 1954. Surface altitude, 1,149.2 feet.

## QUATERNARY—Pleistocene

Recent Stage—Alluvium	Thickness, feet	Depth, feet
Silt, sandy, tan	15	15
Sand, fine to coarse, and fine to medium arkosic gravel	25	40

## PERMIAN—Wolfcampian

Matfield Shale		
Limestone, or limy shale, greenish gray and black	1	41

9-4-29bc.—Sample log of test hole in SW¼ NW¼ sec. 29, T. 9 S., R. 4 E. In field, 20 feet north of center of road. Drilled June 30, 1954. Surface altitude, 1,164.0 feet; depth to water, 29.90 feet July 12, 1954.

## QUATERNARY—Pleistocene

Wisconsinan Stage—Terrace deposits	Thickness, feet	Depth, feet
Silt, black	2	2
Silt, brown	3	5
Clay, tan to brown	7	12
Clay, dark gray	6	18
Clay, sandy, light gray	13	31
Sand, fine to coarse, and fine to medium arkosic gravel	22	53

## PERMIAN—Wolfcampian

Barneston Limestone		
Shale, green and red	4	57
Limestone, greenish gray; contains some chert	1	58

9-4-29bd.—Sample log of test hole in SE¼ NW¼ sec. 29, T. 9 S., R. 4 E. On east side of road, 35 feet north of point where road turns north. Drilled June 30, 1954. Surface altitude, 1,152.2 feet; depth to water, 18.20 feet July 12, 1954.

## QUATERNARY—Pleistocene

Recent Stage—Alluvium	Thickness, feet	Depth, feet
Silt, sandy, tan	10	10
Sand, medium to coarse, and fine to medium arkosic gravel	23	33

## PERMIAN—Wolfcampian

## Barneston Limestone

	Thickness, feet	Depth, feet
Limestone, greenish tan and black.....	1	34

9-4-32adc.—*Sample log of test hole in SW¼ SE¼ NE¼ sec. 32, T. 9 S., R. 4 E. On west side of road, 30 feet west and 10 feet north of windmill where highway turns east. Drilled July 1, 1954. Surface altitude, 1,136.0 feet; depth to water, 11.50 feet July 12, 1954.*

## QUATERNARY—Pleistocene

## Wisconsinan Stage—Terrace deposits

	Thickness, feet	Depth, feet
Silt, sandy, tan.....	4	4
Sand, fine.....	9	13
Gravel, fine to medium, arkosic.....	10	23
Clay, blue to black.....	2	25
Sand, fine to coarse, and fine to medium arkosic gravel.....	13	38

## PERMIAN—Wolfcampian

## Matfield Shale

Shale, red.....	2	40
-----------------	---	----

## REFERENCES

- COOPER, H. H., and JACOB, C. E. (1946) A generalized graphical method of evaluating formation constants and summarizing well-field history: *Am. Geophys. Union*, v. 72, no. 4, p. 526-534.
- DARTON, N. H. (1905) Preliminary report on the geology and underground water resources of the Central Great Plains: U. S. Geol. Survey Prof. Paper 32, p. 1-433.
- FISHEL, V. C. (1948) Ground-water resources of Republic County and northern Cloud County, Kansas: *Kansas Geol. Survey Bull.* 73, p. 1-193, fig. 1-6, pl. 1-12.
- FRYE, J. C., PLUMMER, NORMAN, RUNNELS, R. T., and HLADIK, W. B. (1949) Ceramic utilization of northern Kansas Pleistocene loesses and fossil soils: *Kansas Geol. Survey Bull.* 82, pt. 3, p. 49-124, fig. 1-10.
- FRYE, J. C., and LEONARD, A. B. (1952) Pleistocene geology of Kansas: *Kansas Geol. Survey Bull.* 99, p. 1-225, fig. 1-17, pl. 1-19.
- HAWORTH, ERASMUS (1913) Special report on well waters in Kansas: *Kansas Geol. Survey Bull.* 1, p. 1-103, fig. 1-9, pl. 1-6.
- JACOB, C. E. (1946) Drawdown test to determine effective radius of artesian well: *Am. Soc. Civil Eng. Proc.*, v. 72, no. 5, p. 629-646.
- JEWETT, J. M. (1941) Geology of Riley and Geary Counties, Kansas: *Kansas Geol. Survey Bull.* 39, p. 1-164, fig. 1-2, pl. 1-17.
- , (1949) Oil and gas in eastern Kansas: *Kansas Geol. Survey Bull.* 77, p. 1-308, fig. 1-53, pl. 1-4.
- LEE, WALLACE, LEATHEROCK, CONSTANCE, and BOTINELLY, THEODORE (1948) Stratigraphy and structural development of the Salina Basin of Kansas: *Kansas Geol. Survey Bull.* 74, p. 1-155, fig. 1-11, pl. 1-14.
- LOGAN, W. N. (1897) The Upper Cretaceous of Kansas: *Kansas Geol. Survey*, v. 2, p. 199-234, fig. 10-11, pl. 28-34.
- METZLER, D. F., and STOLTENBERG, H. A. (1950) The public health significance of high nitrate waters as a cause of infant cyanosis and methods of control: *Kansas Acad. Sci. Trans.*, v. 53, p. 194-211.
- PLUMMER, NORMAN, and ROMARY, J. F. (1947) Kansas clay, Dakota Formation: *Kansas Geol. Survey Bull.* 67, p. 1-247, fig. 1-17, pl. 1-7.
- SCHOEWE, W. H. (1949) The geography of Kansas, part 2, physical geography: *Kansas Acad. Sci. Trans.*, v. 52, p. 261-333.
- , (1952) Coal resources of the Cretaceous System (Dakota Formation) in Central Kansas: *Kansas Geol. Survey Bull.* 96, pt. 2, p. 73-156, fig. 1-23, pl. 1-6.
- THEIS, C. V. (1935) The relation between the lowering of the piezometric surface and the rate and duration of discharge of a well using ground-water storage: *Am. Geophys. Union Trans.*, pt. 2, p. 519-524.
- U. S. PUBLIC HEALTH SERVICE (1946) Drinking water standards: *Public Health Rept.*, v. 61, no. 11, p. 371-384.
- U. S. SALINITY LABORATORY STAFF (1954) Diagnosis and improvement of saline and alkali soils: U. S. Dept. Agriculture, *Agriculture Handbook* No. 60, p. 1-160, fig. 1-33.


## INDEX

- Abstract, 9  
Acknowledgments, 12  
Agriculture, 17  
Alluvium, 77  
Aquifer test, 52  
Artesian conditions, 25  
Barneston Limestone, 65  
Bibliography, 103  
Cenozoic geologic history, 23  
Ceramic materials, 19  
Chapman Creek, 14, 76  
Chase group, 65  
Chemical Character of water, 36  
Chloride in water, 42  
Classification of irrigation water, 47, 49  
Clay Center, 32  
Clifton, 32  
Climate, 14  
Colorado Group, 73  
Comanchean Series, 71  
Configuration of bedrock surface, 34  
Construction materials, 17  
Cretaceous system, 71  
Crops, 17  
Dakota Formation, 73  
Discharge of ground water, 28  
    by evaporation and transpiration, 28  
    by seepage and springs, 29  
    by wells, 29  
Dissolved solids in water, 38  
Domestic water supplies, 31  
Doyle Shale, 66  
Dune sand, 78  
Eolian deposits, 76, 77  
Fancy Creek, 14  
Field work, 11  
Fluoride in water, 42  
Geography, 14  
Geologic formations, 65  
    Alluvium, 77  
    Barneston Limestone, 65  
    Dakota Formation, 73  
    Doyle Shale, 66  
    Dune sand, 78  
    Kiowa Shale, 71  
    Nolans Limestone, 69  
    Odell Shale, 69  
    Terrace deposits, 74, 76  
    Wellington Formation, 69  
    Winfield Limestone, 68  
Geology, 22  
Green, 33  
Ground water, 24  
    Discharge of, 28  
    Movement of, 26  
    Principles of occurrence, 24  
    Quality of, 36  
    Recharge of, 27  
    Source, 25  
Growing season, 15  
Gulfian Series, 73  
Gypsum, 19  
Hardness of water, 39  
Highways, 17  
Hydrologic properties of water-bearing materials, 49  
Idana, 33  
Illinoian Stage, 74  
Industrial supplies, 31  
Iron in ground water, 42  
Irrigation supplies, 35  
    Extent, 35  
    Quality of water for, 43  
Kansan Stage, 74  
Kiowa Shale, 71  
Leonardian Series, 69  
Location of wells and test holes, 12  
Logs of wells and test holes, 92  
Longford, 33  
Mesozoic Era, 23  
Methods of investigation, 11  
Mineral resources, 17  
Morganville, 33  
Nitrate in water, 43  
Nolans Limestone, 69  
Odell Shale, 69  
Oil, 18  
Paleozoic Era, 22  
Permeability, 50, 56  
Permian System, 65  
Pleistocene Epoch, 23  
Pleistocene Series, 74  
Population, 15  
Precipitation, 14, 15  
Previous investigations, 11  
Public supplies, 32  
Purpose of investigation, 9  
Quality of water, 36  
Quaternary System, 23, 74  
Railroads, 16  
Recent Stage, 77  
Recharge of ground water, 27  
    by percolation from outside the area, 28  
    by precipitation, 27  
    by seepage, 28  
Records of wells, 79  
Recovery of ground water, 29  
References, 103  
Republican River, 14, 74, 76, 78  
Rock units, 65



- Saturated thickness, 34
- Sodium-adsorption ratio, 45, 47, 49
- Storage Coefficient, 50, 65
- Storage, water in, 36
- Straight-line method of determining transmissibility, 51, 56, 64
- Sulfate in ground water, 43
- Summary of stratigraphy, 20
- Sumner group, 69
- Terrace deposits, 74, 76
- Tertiary period, 23
- Test holes, logs of, 92
- Theis recovery method of determining transmissibility, 50, 56
- Topography and drainage, 14
- Transportation, 16
- Turner aquifer test, 52
- Types of wells, 30
- Utilization of water, 31
- Wakefield, 33
- Water supplies, 31
  - Domestic, 31
  - Industrial, 31
  - Irrigation, 35
  - Public, 32
- Water table, 26
- Well-numbering system, 12
- Wellington Formation, 69
- Winfield Limestone, 68
- Wisconsinan Stage, 76
- Wolfcampian Series, 65



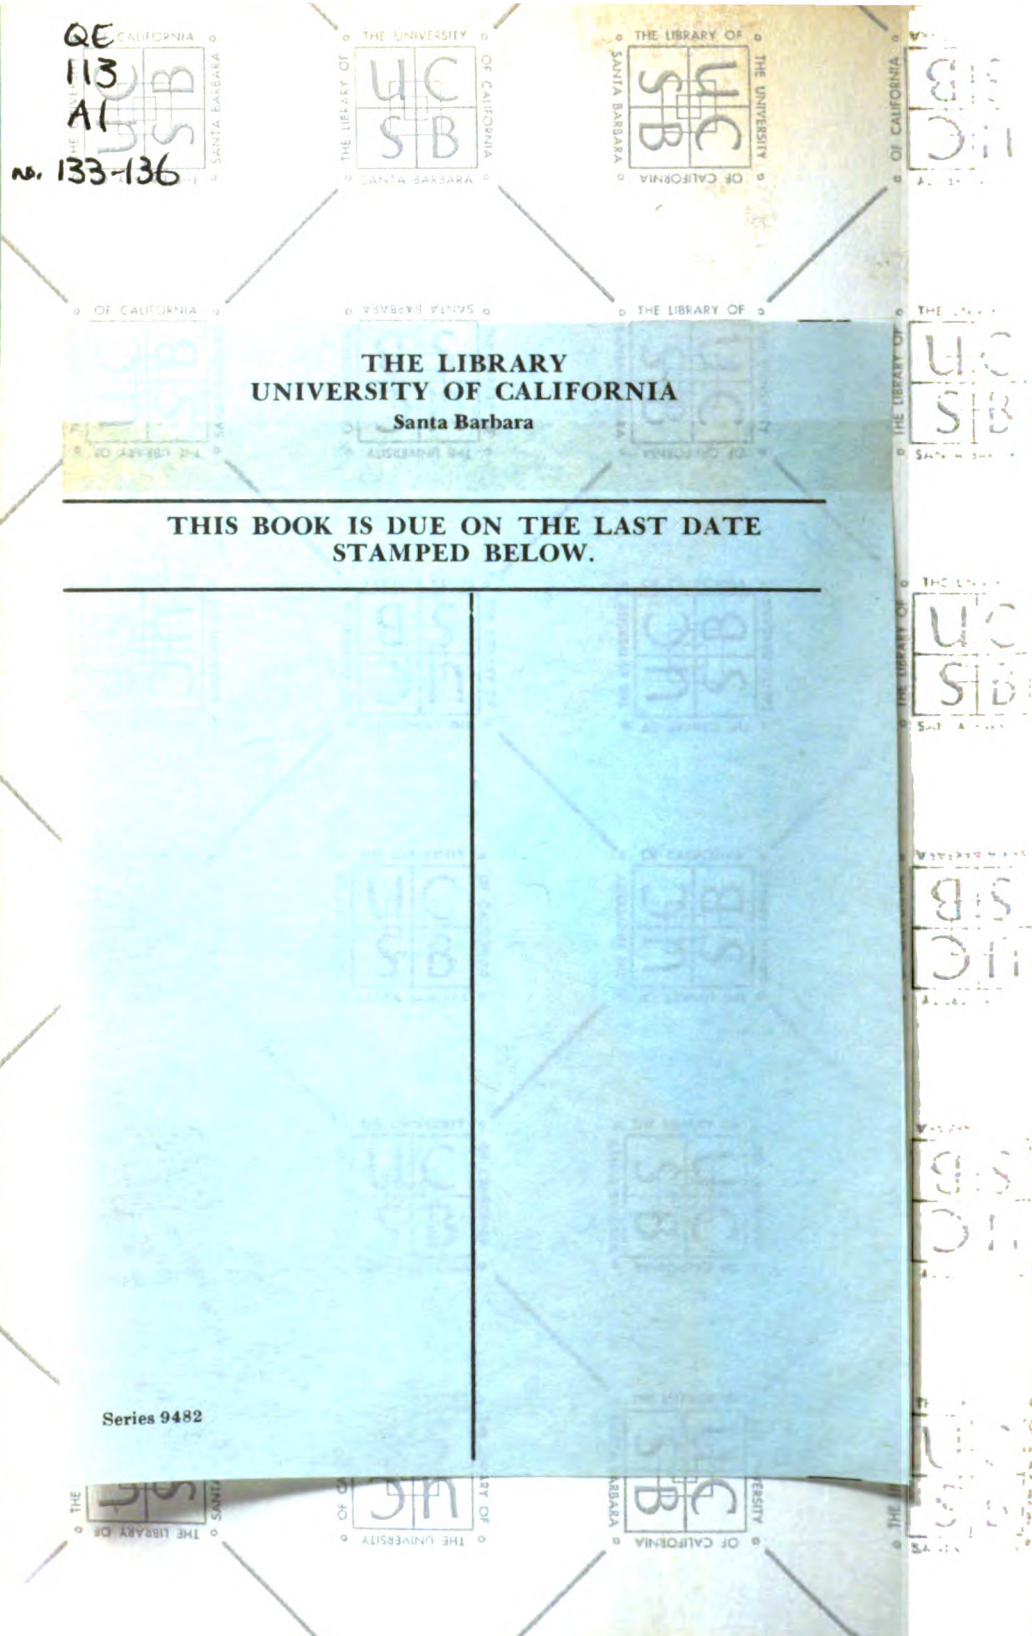



UCSB LIBRARY





QE  
113  
A1  
no. 135  
#393  
plates

STATE GEOLOGICAL SURVEY OF KANSAS



BULLETIN 135, PLATE 3

# GEOLOGIC SECTIONS OF KANSAS RIVER VALLEY BETWEEN WAMEGO AND TOPEKA VICINITY


by Henry V. Beck  
1958

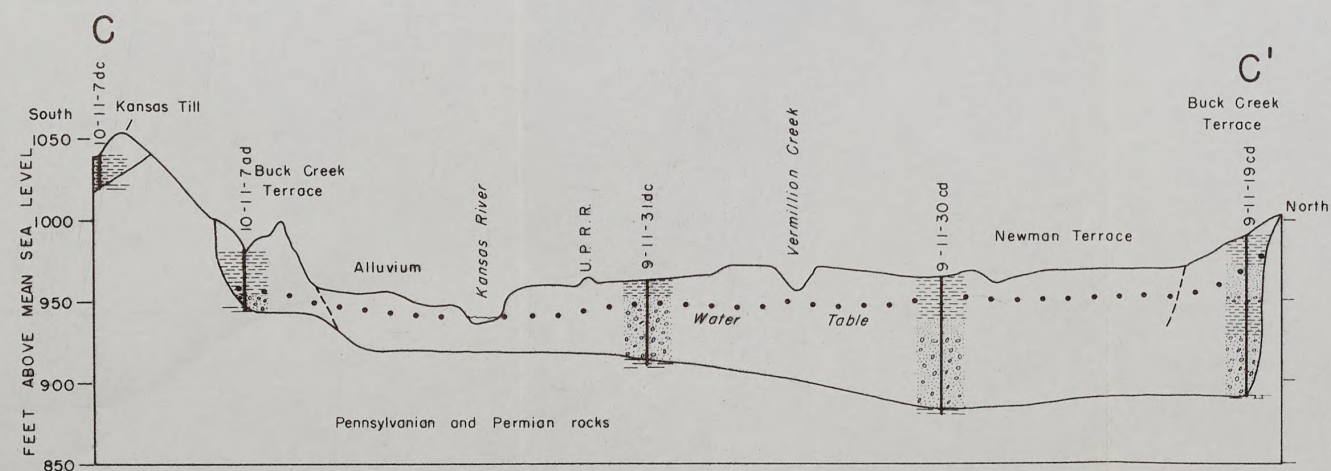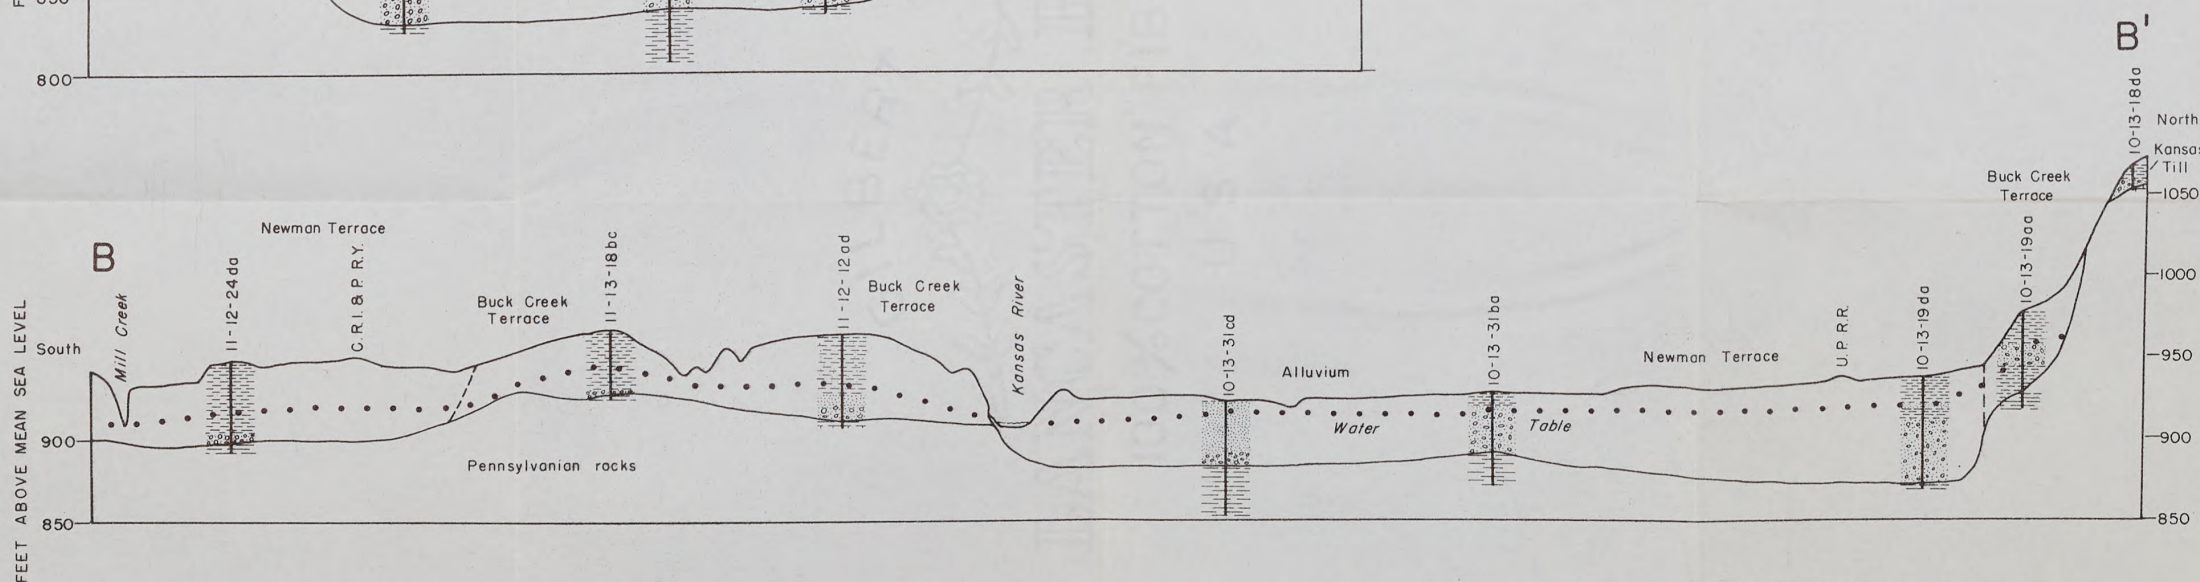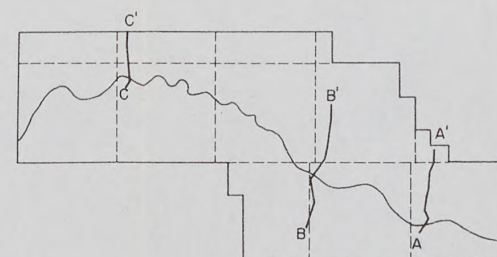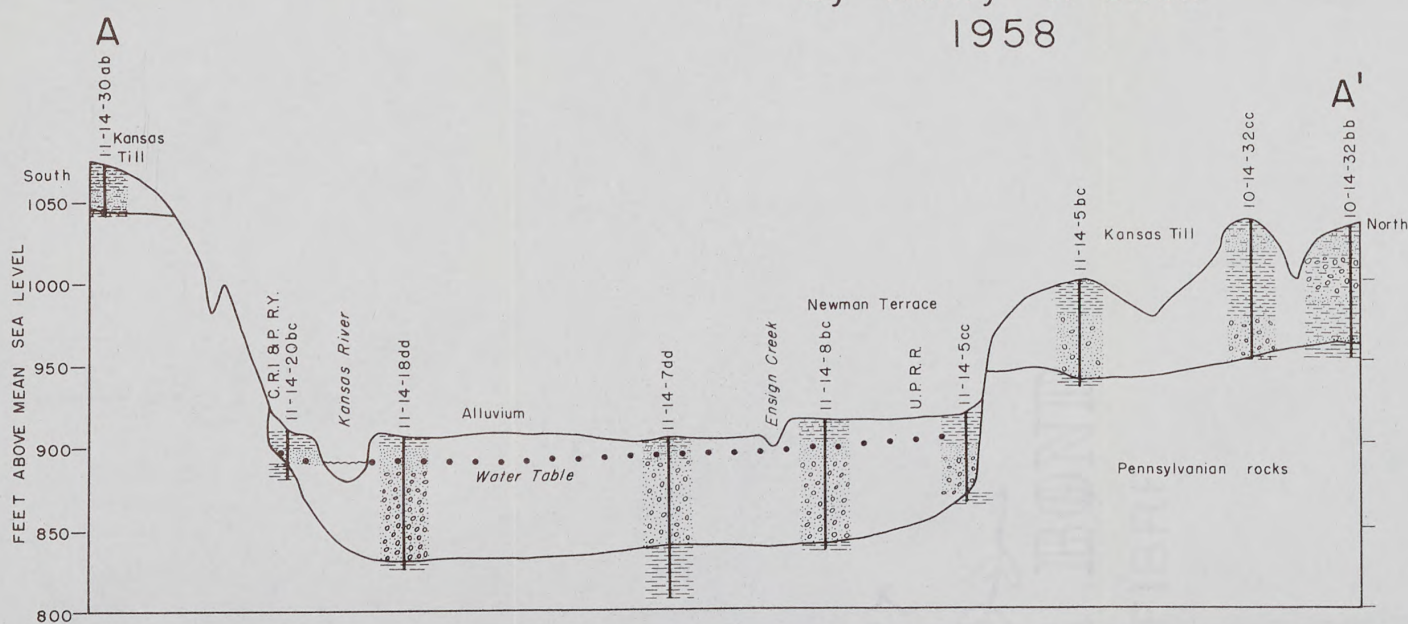


## EXPLANATION





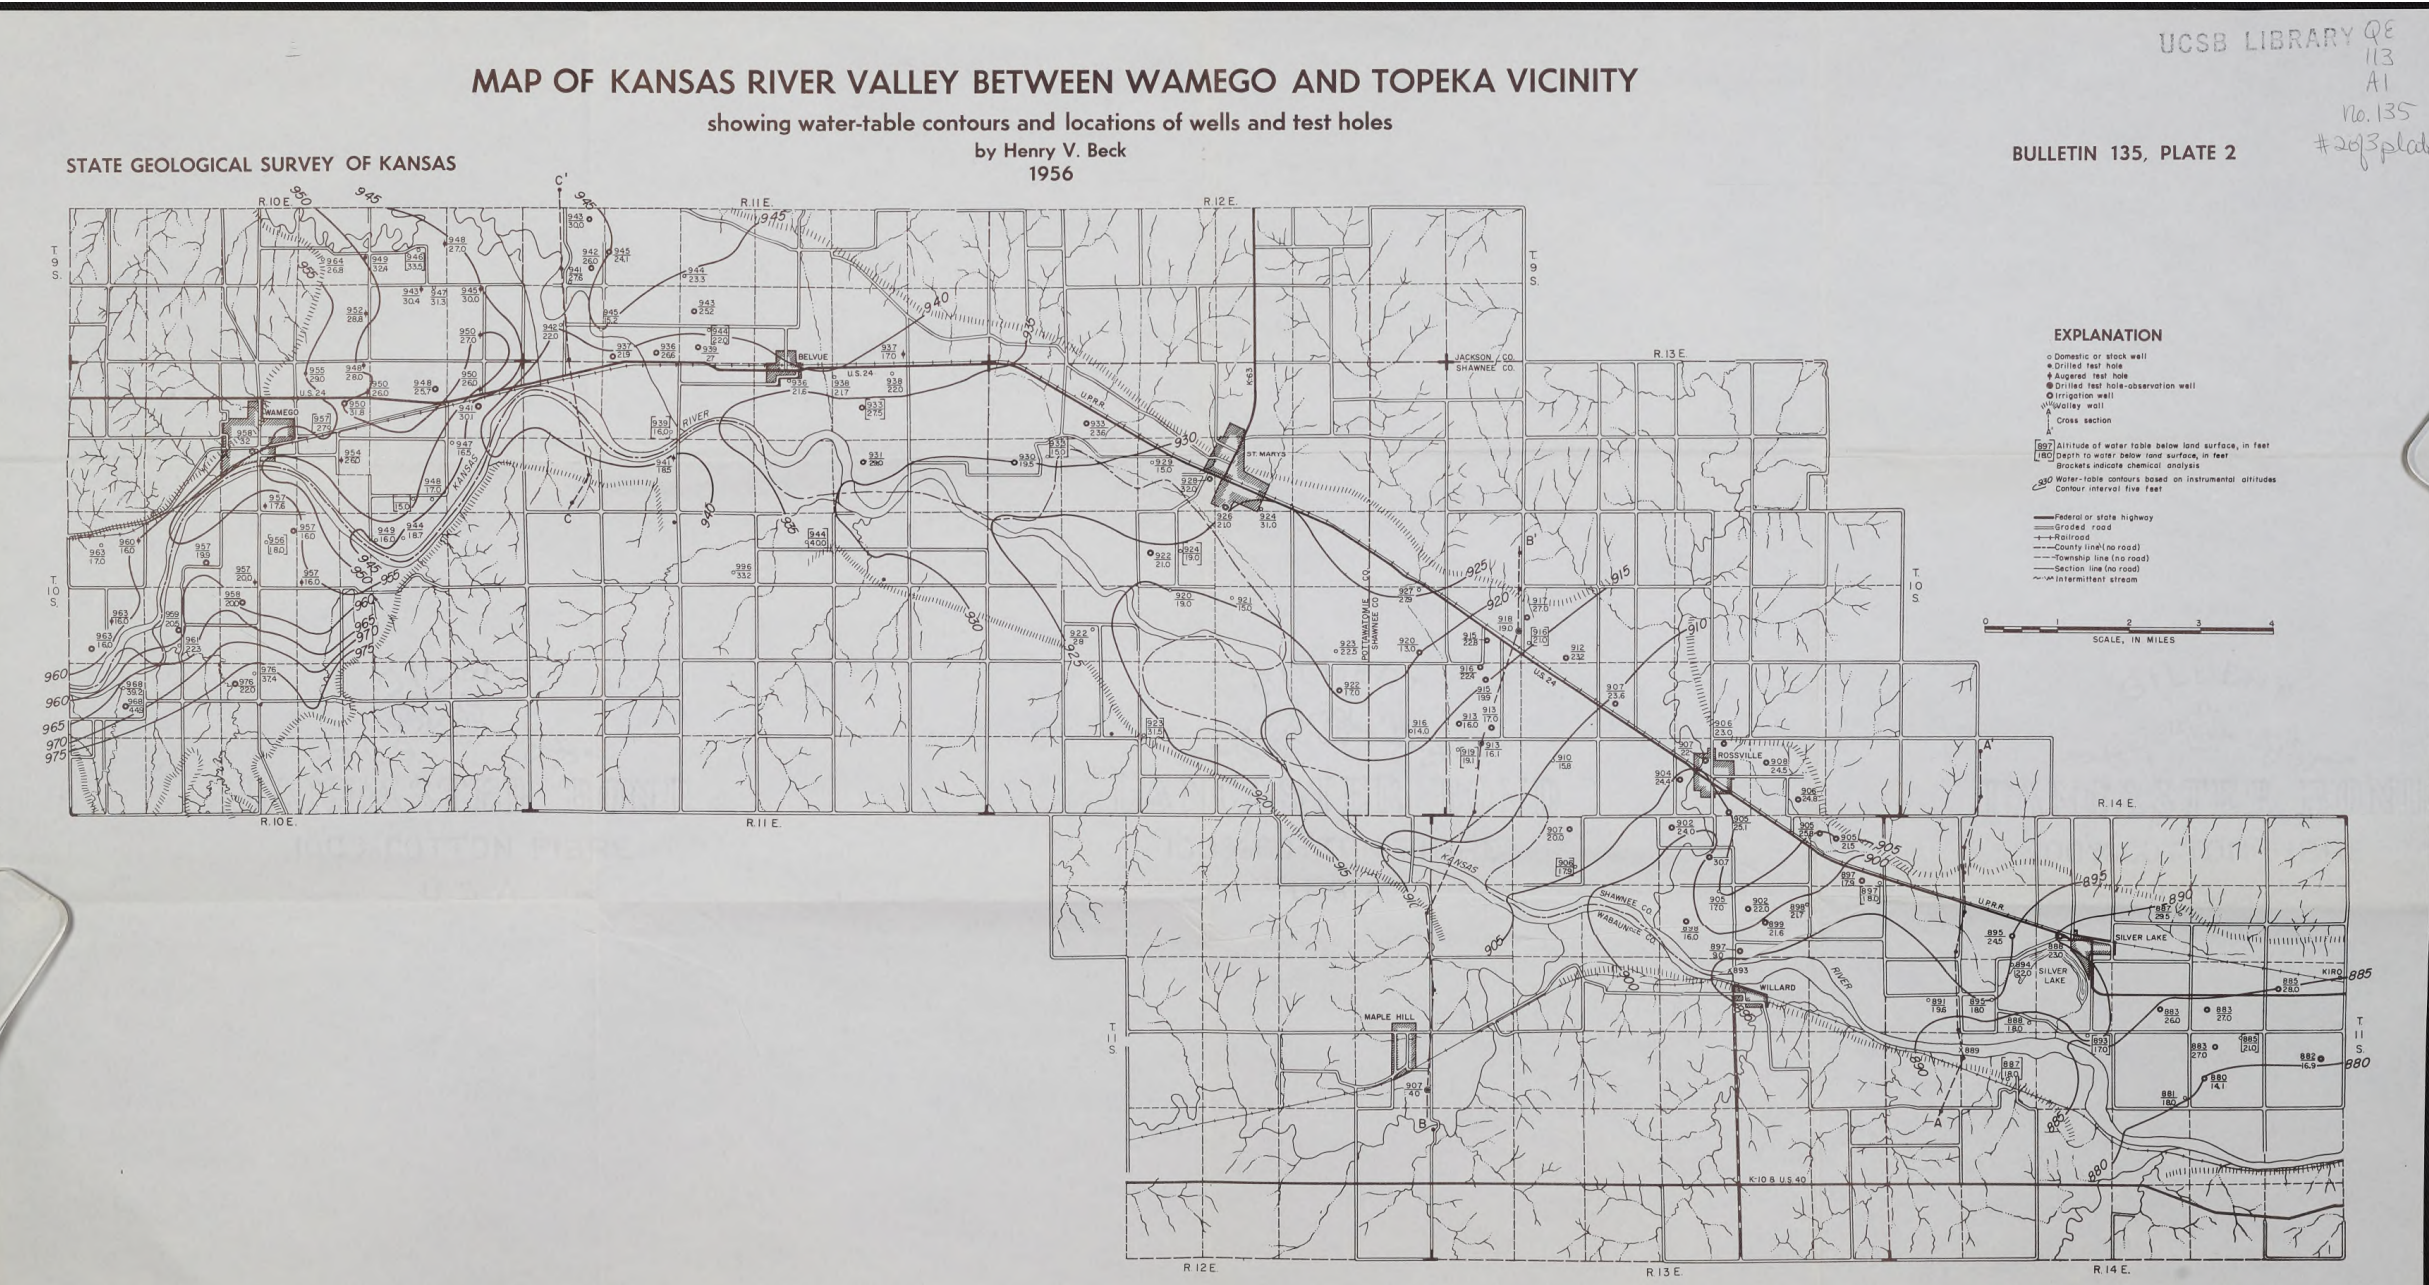



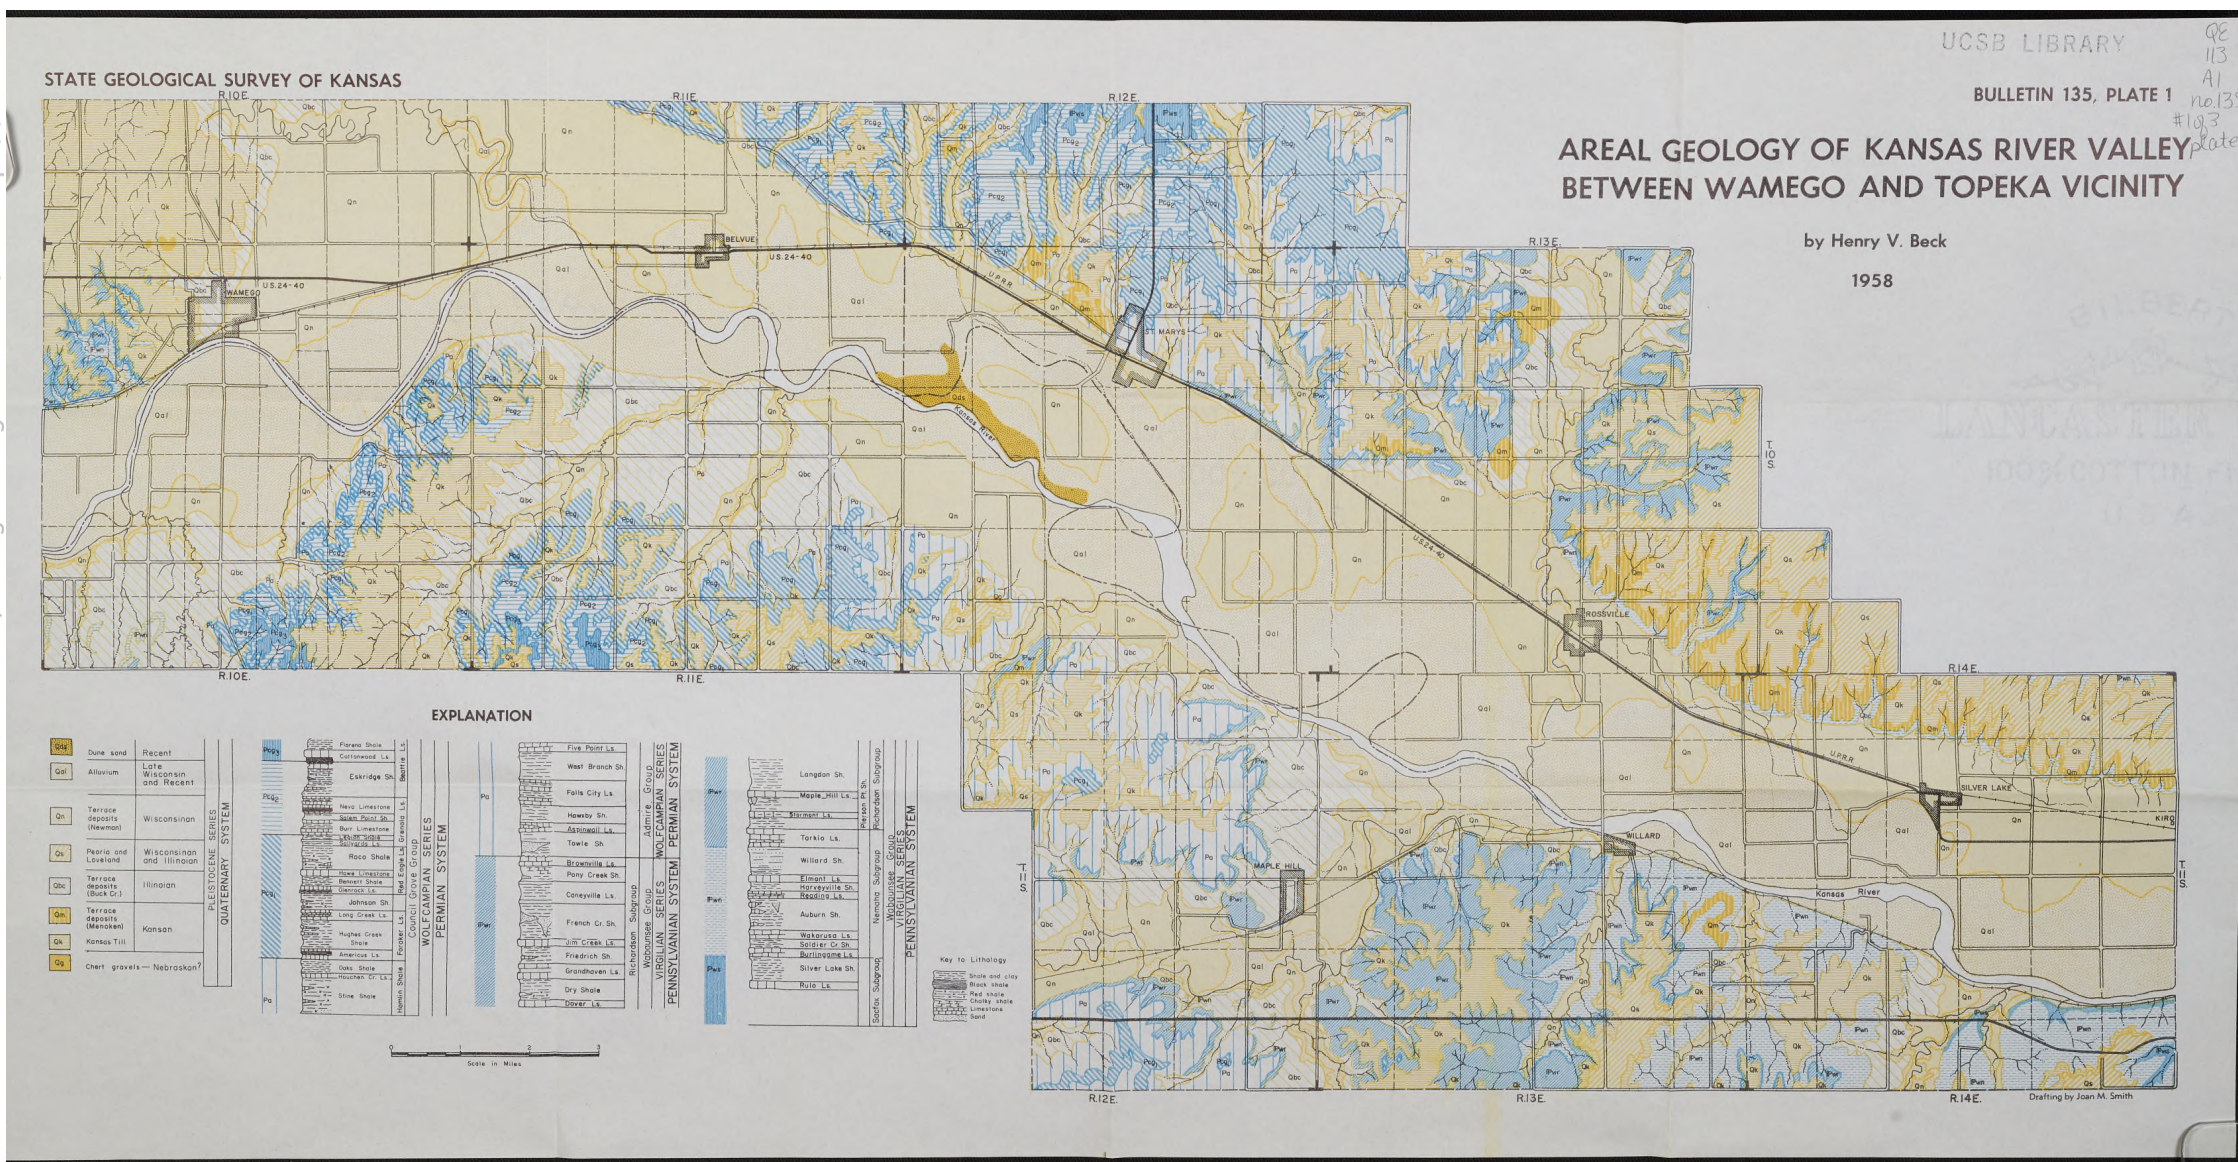



# AREAL GEOLOGY OF CLAY COUNTY, KANSAS

By

Kenneth L. Walters and Charles K. Bayne

Bulletin 136


Plate 1

State Geological Survey of Kansas

1958

UCSB LIBRARY

QE  
113  
A1  
No. 136  
#103  
plates

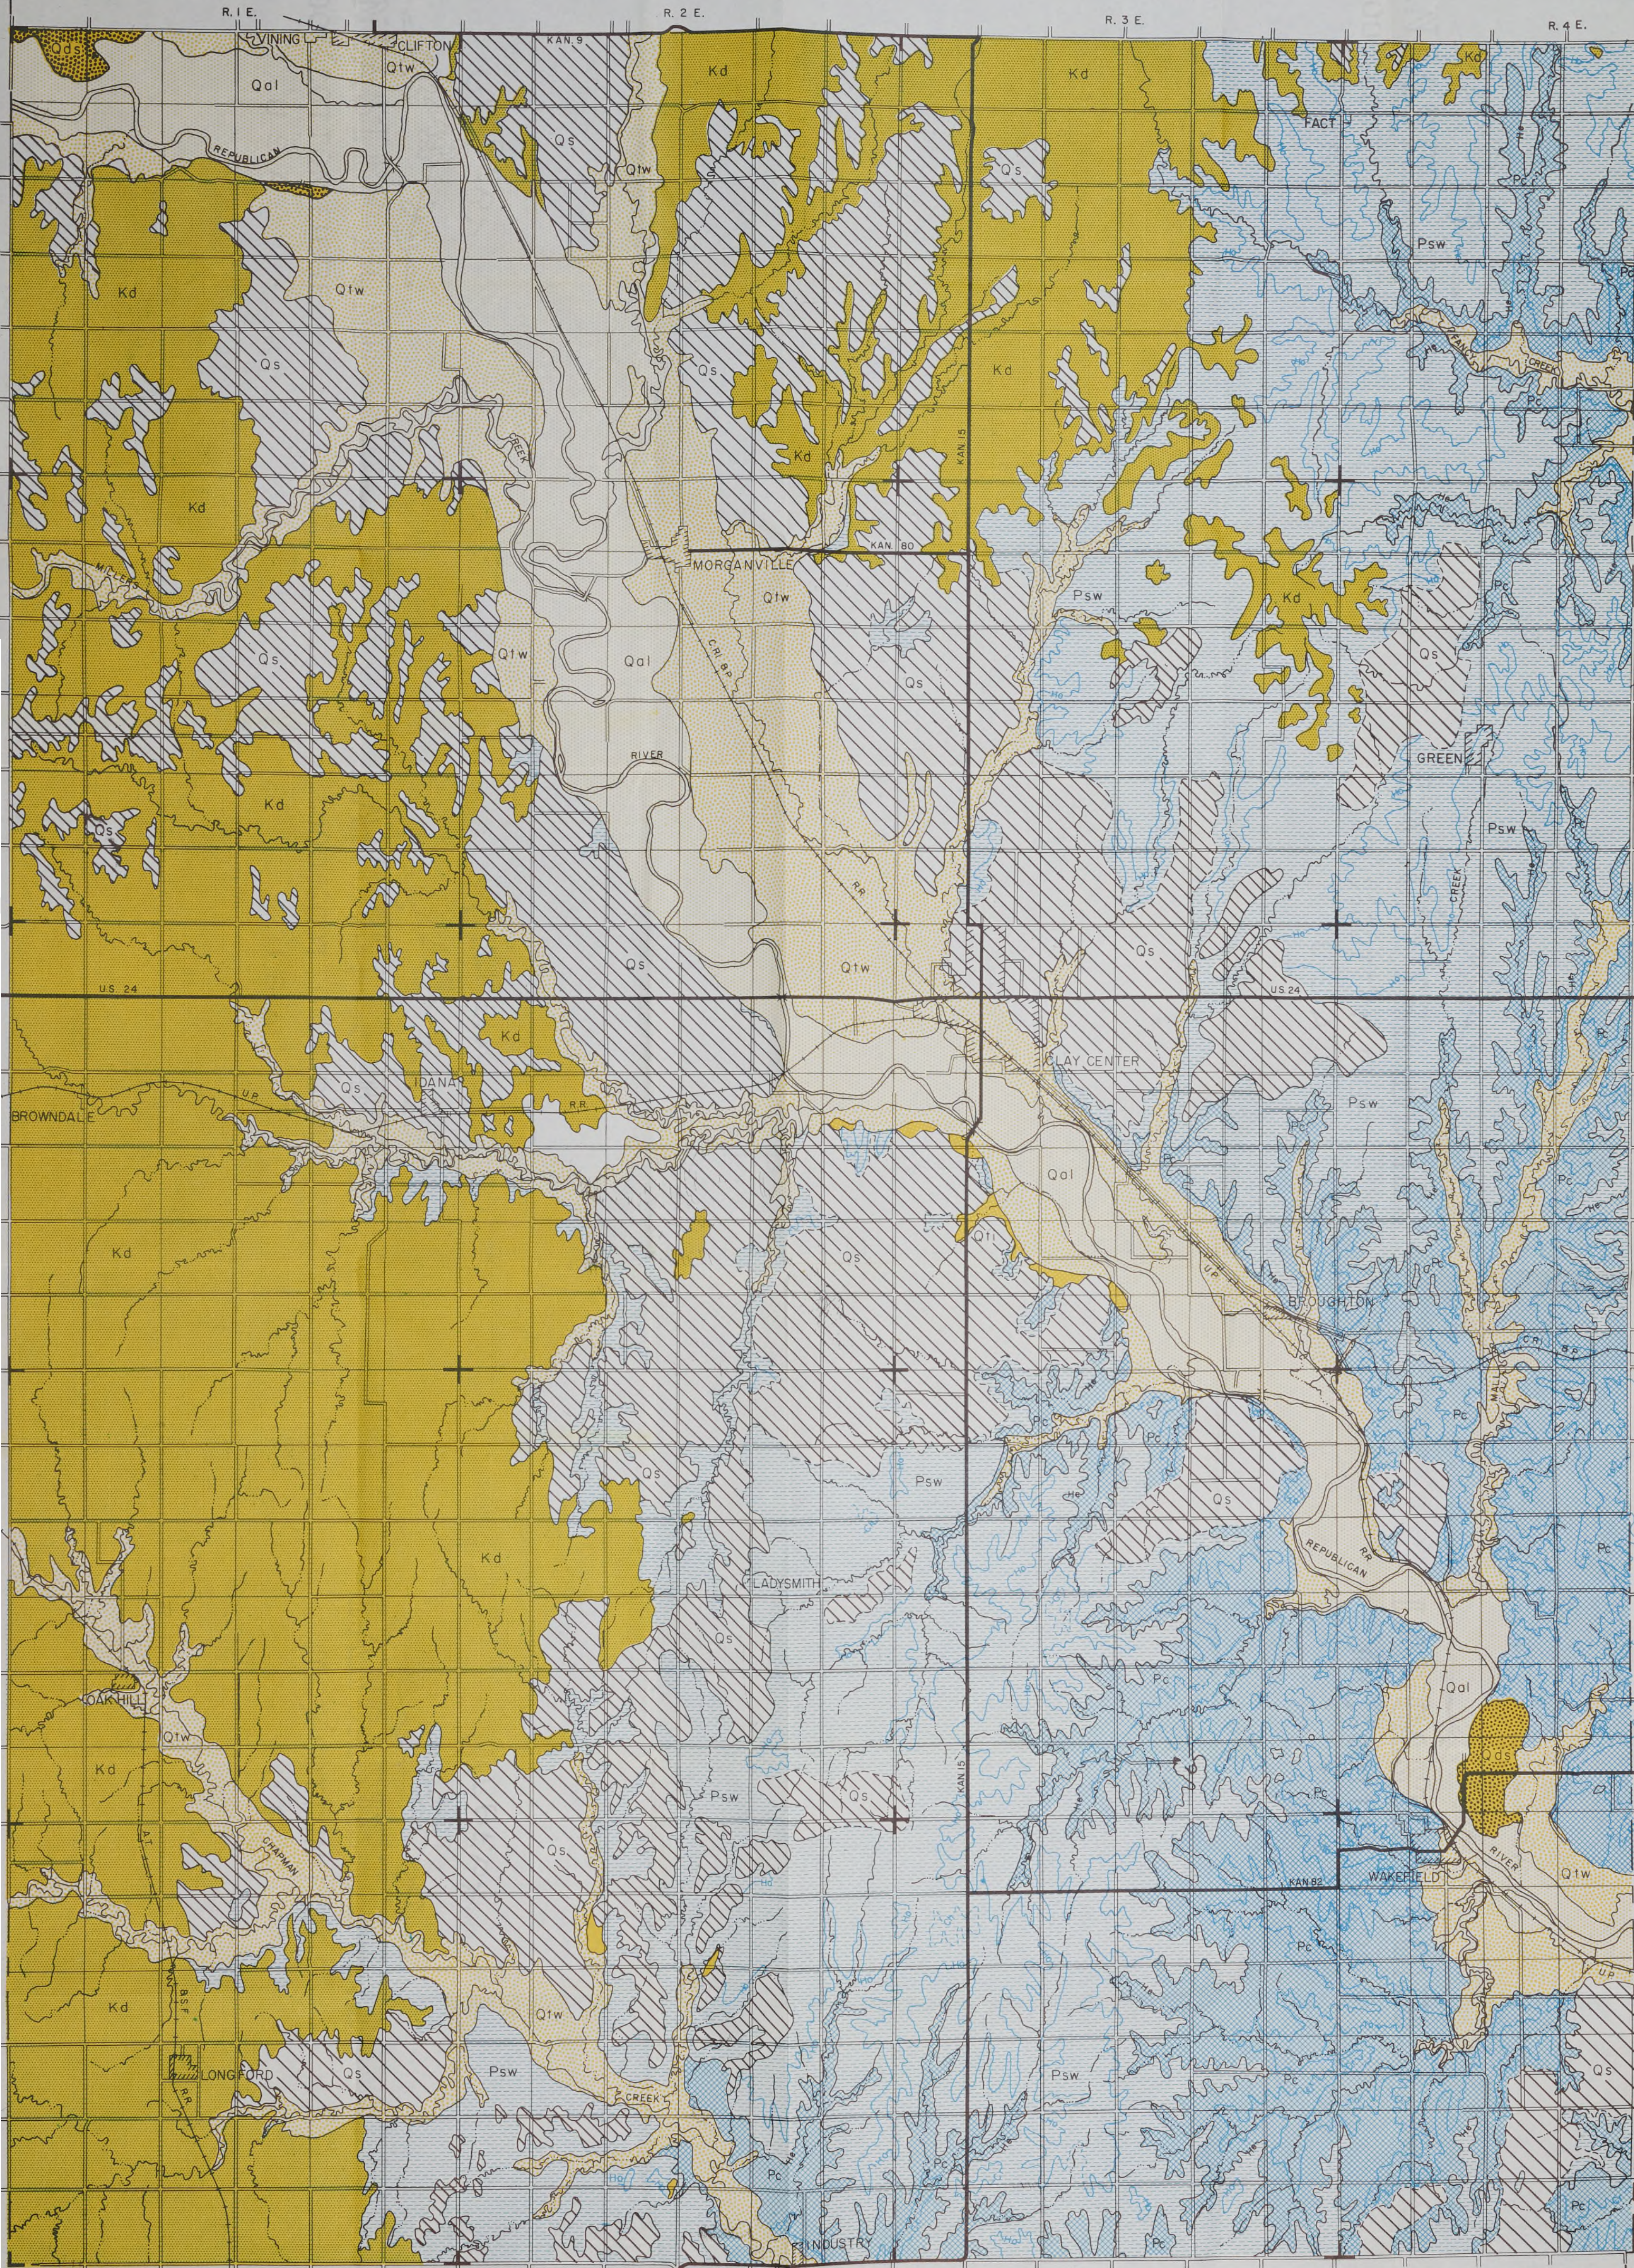


## EXPLANATION



Dune sand

Fine to medium quartz sand. Above water table and does not yield water to wells.




Alluvium

Clay, silt, sand, and gravel. Yields large quantities of water of good quality to wells.



Wisconsin terrace deposits

Stream-deposited silt, clay, sand, and gravel. Yield large quantities of water of good quality to wells.



Eolian silt

Reddish-brown massive silt. Yields no water to wells.




Illinoian terrace deposits

Chiefly silt and clay; contain much less sand and gravel than Wisconsin terrace deposits. Yield small to moderate quantities of water to wells.




Dakota Formation

Varicolored silt to sandy shale and massive sandstone; as mapped includes Kiowa Shale. Yields moderate amounts of water of good quality to wells.



Wellington Formation


Chiefly gray shale containing a chert bed, Ch, and the Hellenberg Limestone member, Ho. Gypsum occurs locally at base of formation. Yields minor quantities of mineralized water to wells.



Chase Group

Upper boundary marked by Herington Limestone member, He, of Niangua Limestone; includes as mapped, Crosswell Limestone member, Co, of Winfield Limestone; Towanda Limestone member, To, of Doyle Shale; and Fort Riley Limestone member, Fr, of Barnston Limestone. Herington Limestone, Crosswell Limestone, and Towanda Limestone members locally yield small quantities of water to wells. Fort Riley Limestone member yields moderate quantities of water to wells.

- Federal or State Highway
- Graded road
- Railroad
- County line (no road)
- Township line (no road)
- Section line (no road)
- Intermittent stream

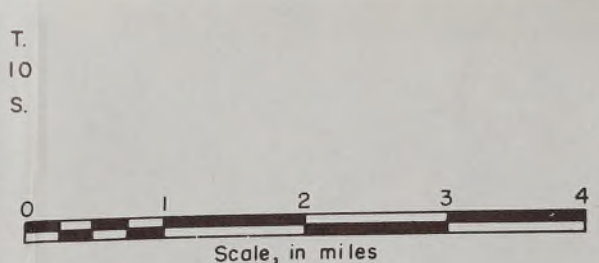

QUATERNARY  
PLEISTOCENE  
CRETACEOUS  
GULFIAN  
LEONARDIAN  
PERMIAN  
WOLF CAMPIAN

Generated at University of Kansas on 2023-10-02 18:46 GMT / https://hdl.handle.net/2027/uc1.aa0003535366  
Public Domain in the United States; Google-digitized / http://www.hathitrust.org/access\_use#pd-us-google

Base compiled from maps prepared by the Soil Conservation Service

Drainage from map prepared by U. S. Dept. of Agriculture


Digitized by Google

Original from  
UNIVERSITY OF CALIFORNIA







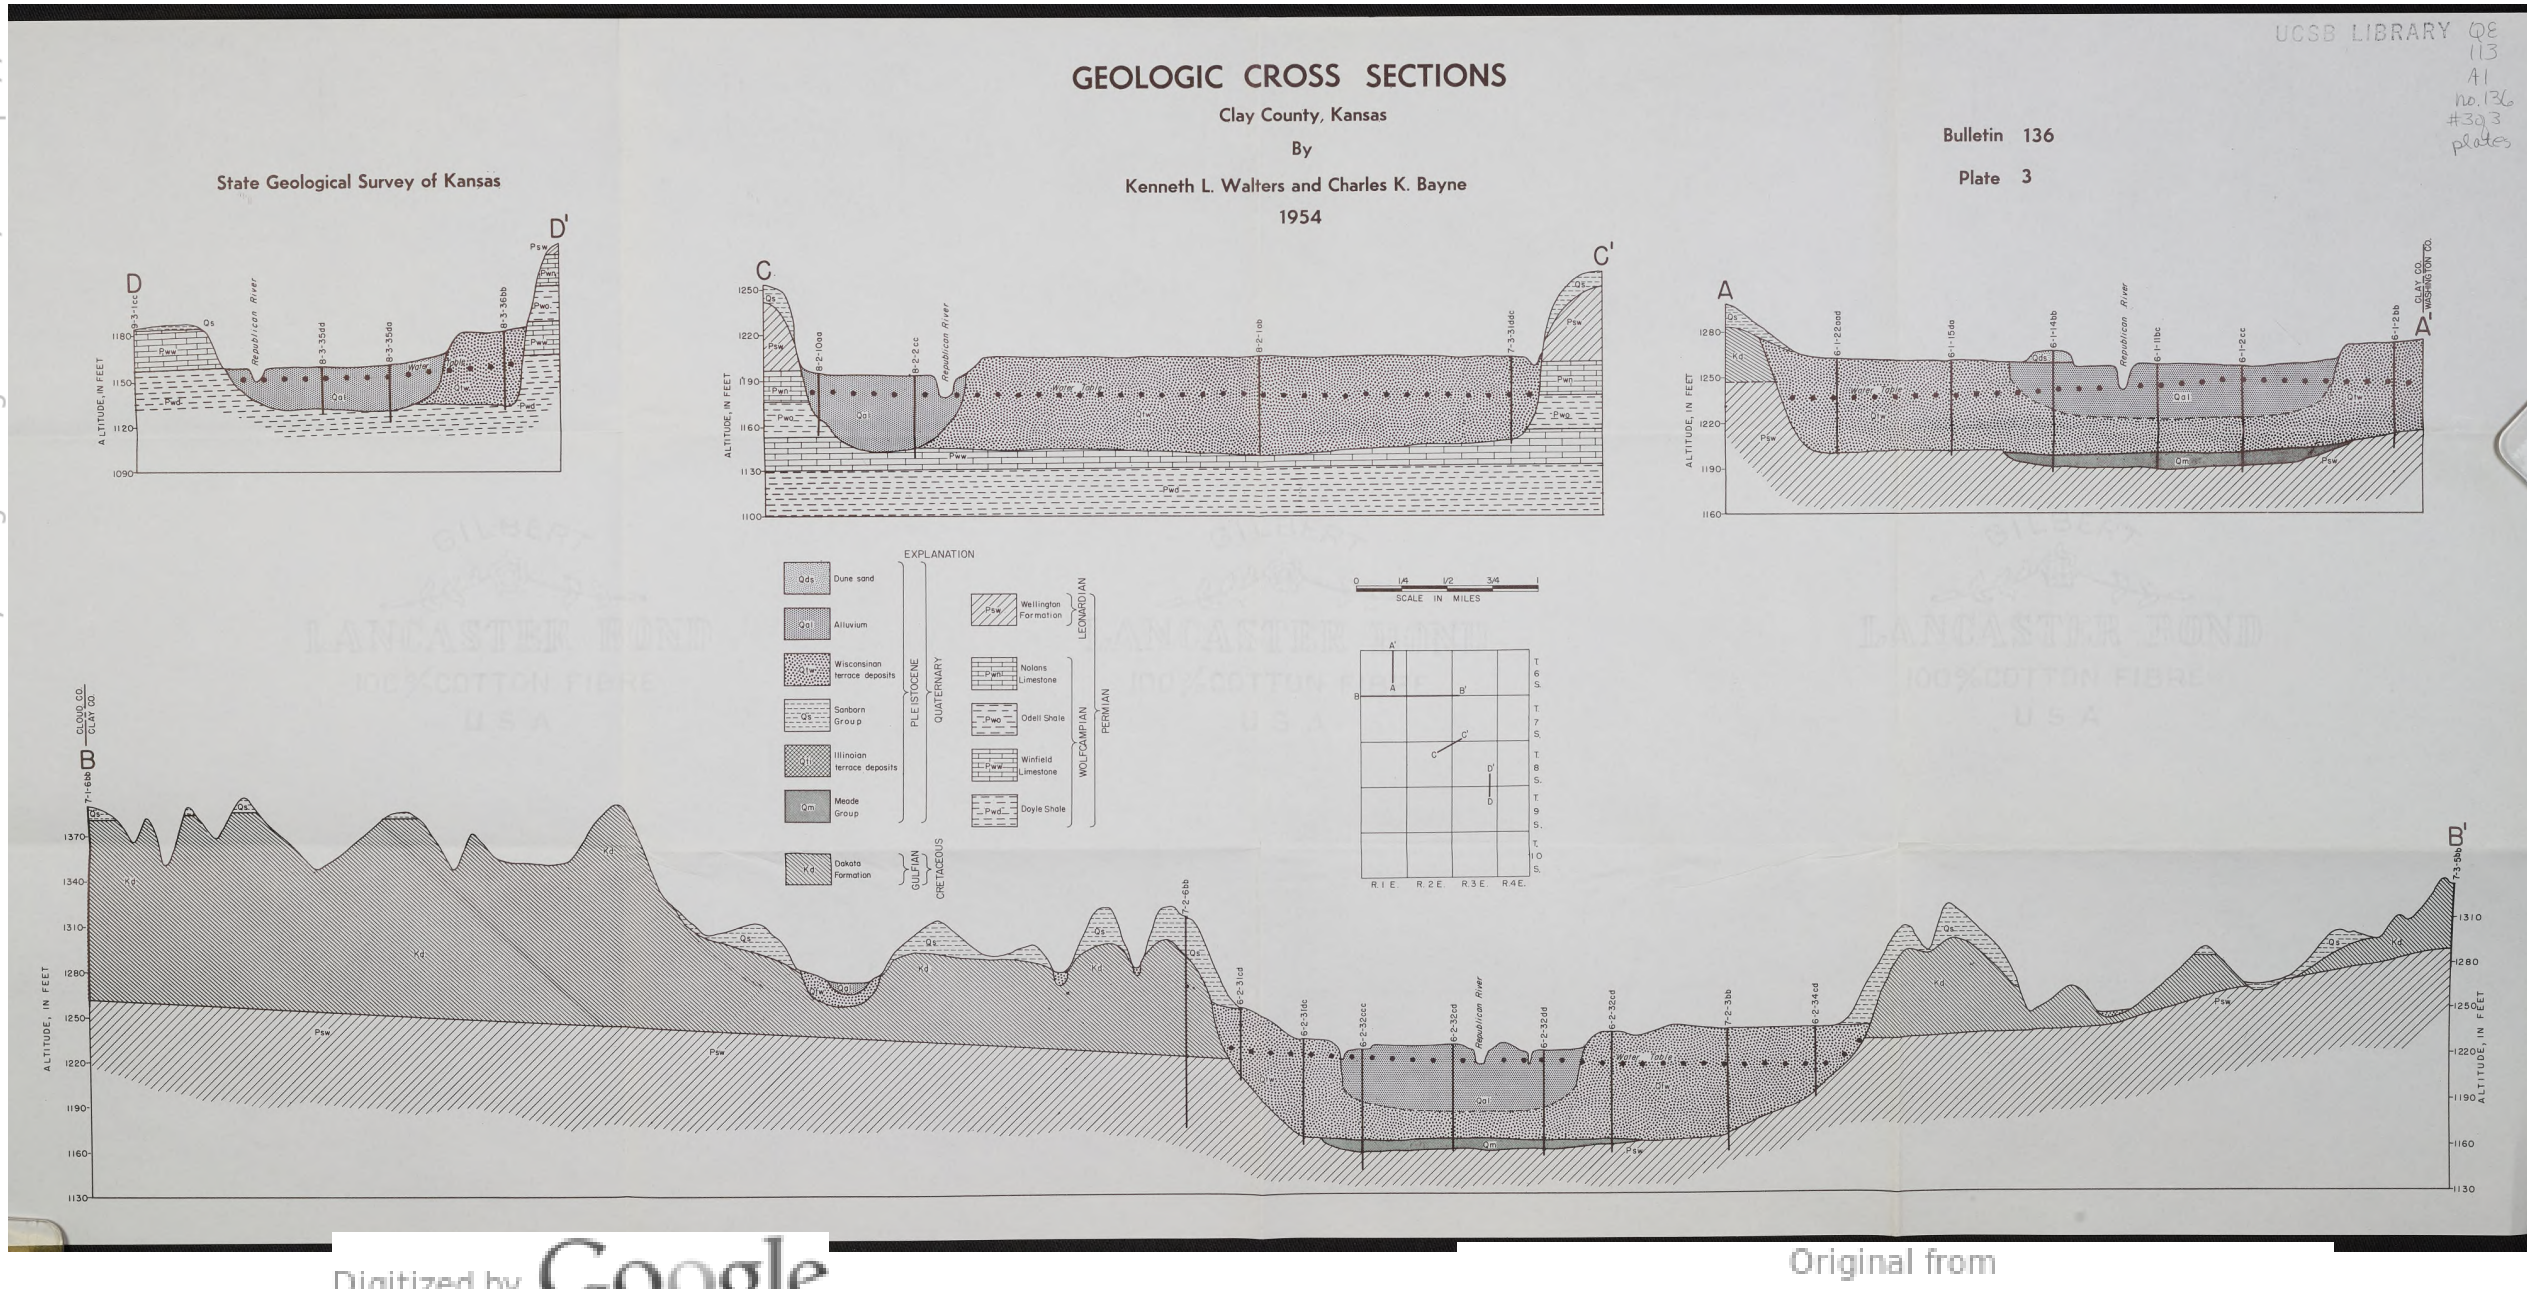





UCSB LIBRARY  
QE  
113  
A1  
no. 134  
pt. 8  
#103 plates

# ISOPACHOUS MAPS OF PLATTSBURG LIMESTONE AND VILAS SHALE, NEODESHA-FREDONIA AREA

by JOHN W. HARBAUGH  
1959

STATE GEOLOGICAL SURVEY OF KANSAS

BULLETIN 134, PART 8 PLATE 1

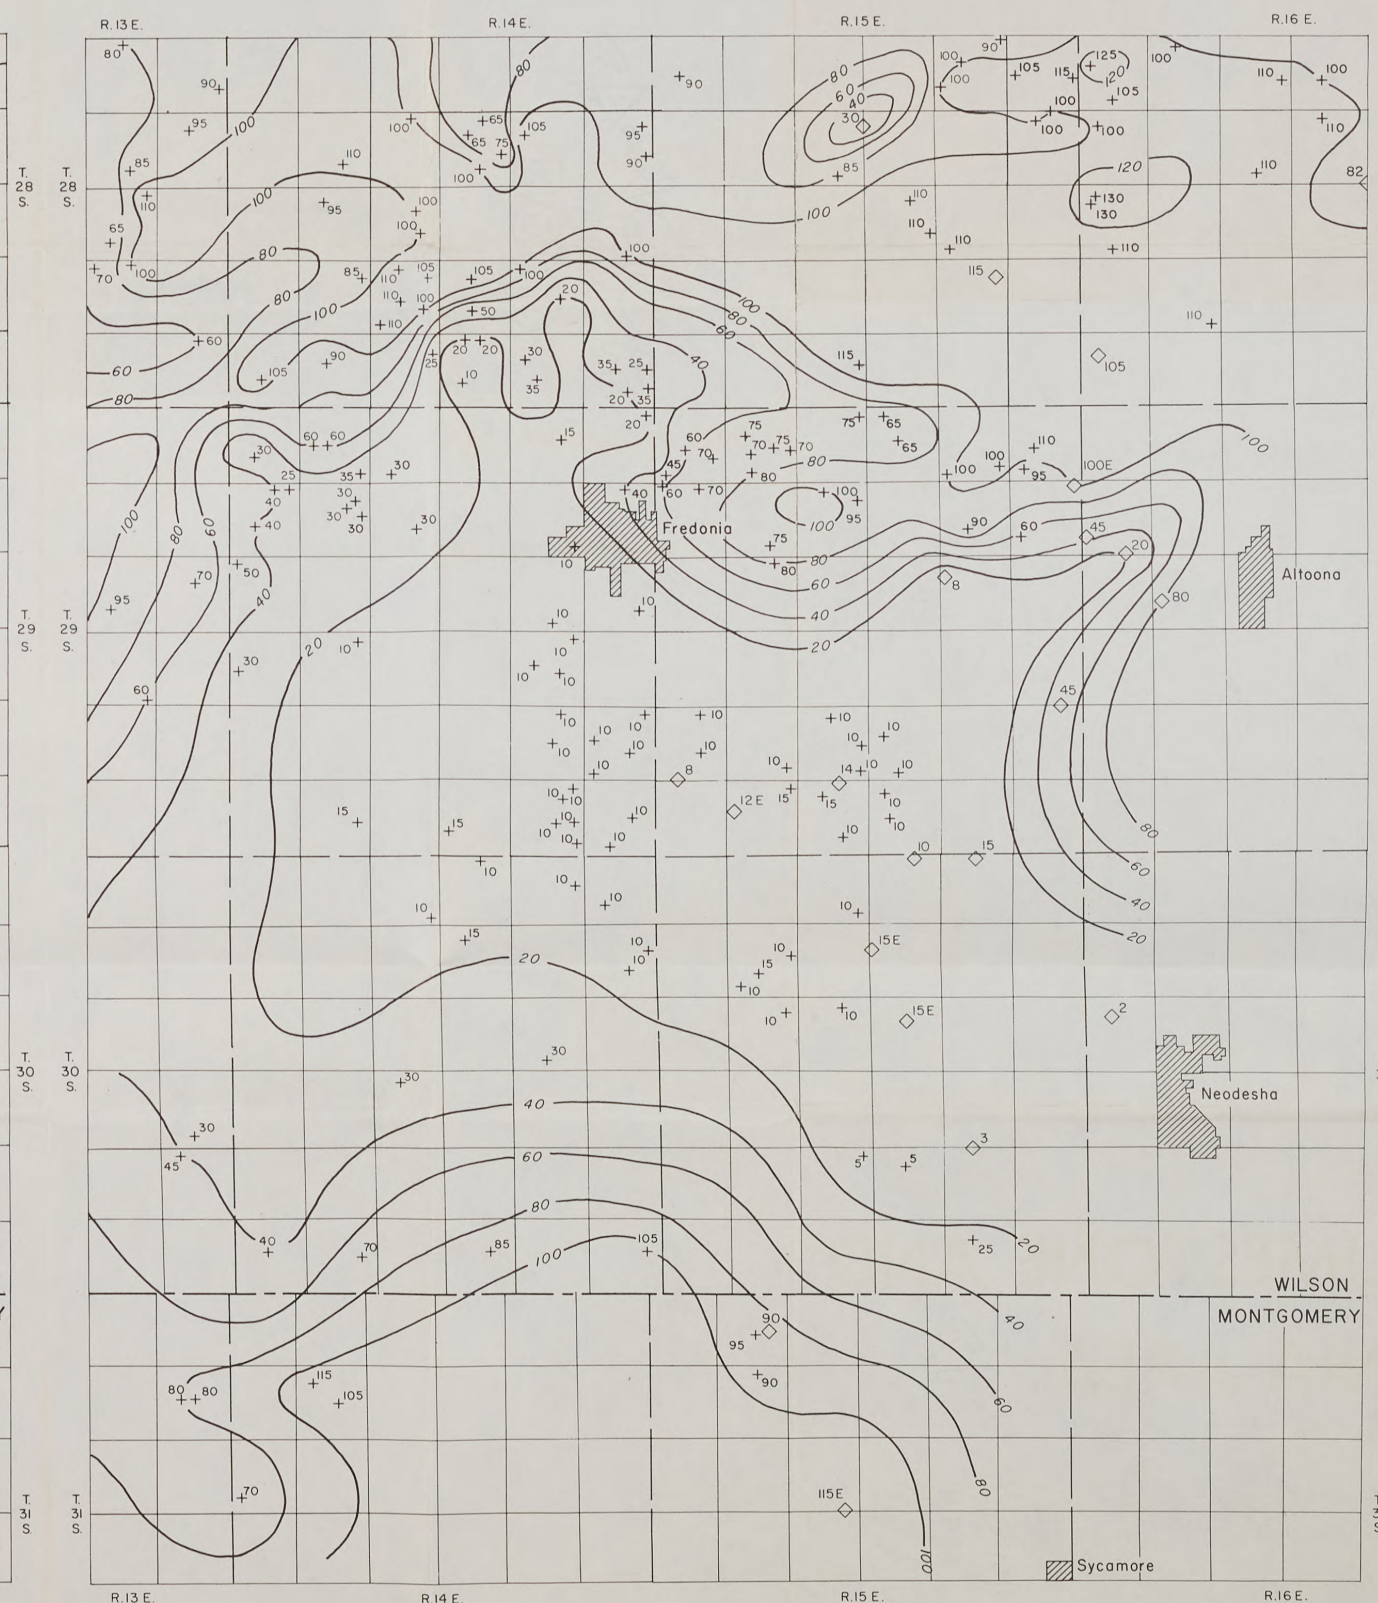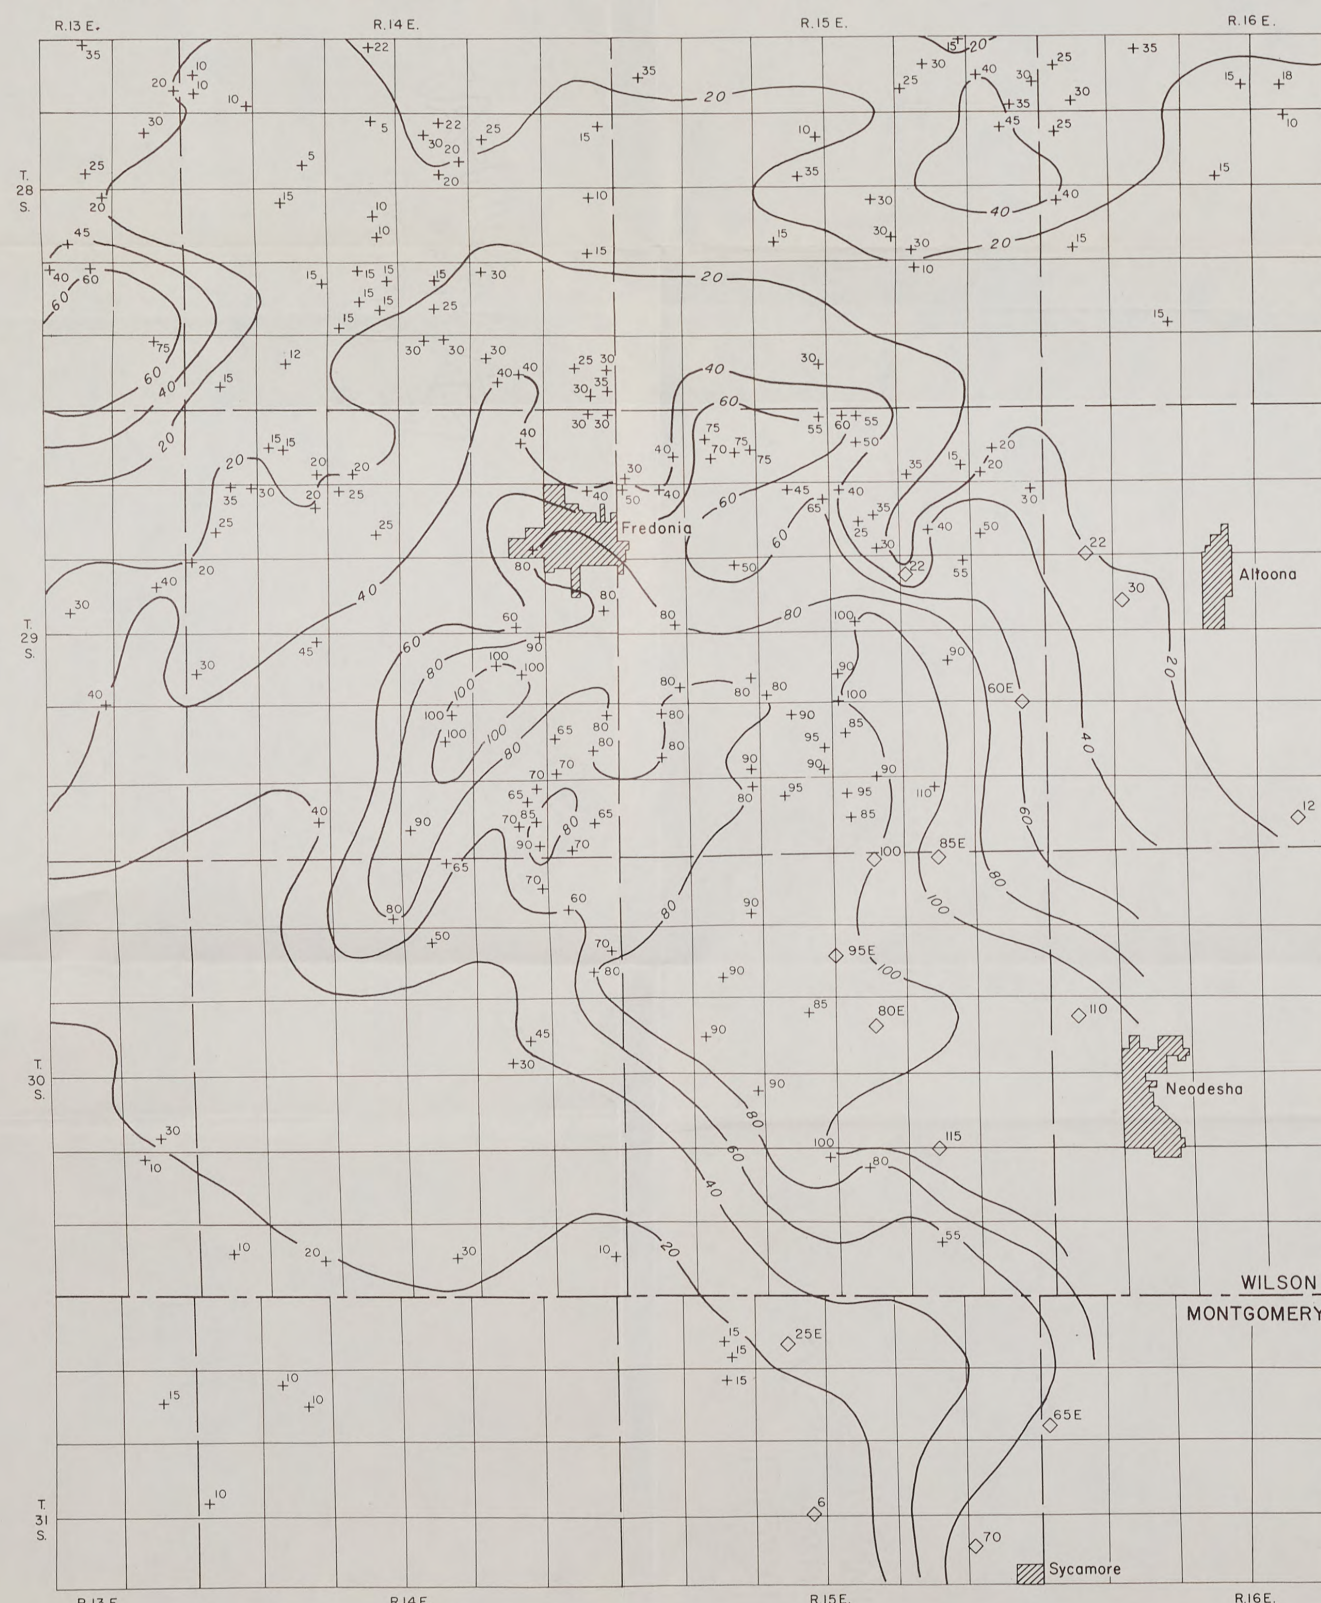

+ Drillers log thickness shown subject to appreciable error.  
◇ Measured outcrop section thickness relatively accurate except where estimated, as indicated by E following figure.

0 1 2 3 4 5  
Scale in miles  
Contour interval 20 feet

A. Isopachous map of Plattsburg Limestone

B. Isopachous map of Vilas Shale



UCSB LIBRARY  
QE 113  
#1  
no. 136  
#203  
plates

# MAP OF CLAY COUNTY, KANSAS

Showing Depth to Water, Location of Wells, Springs, and Test Holes for which  
Records are Given, and Water-Table Contours

By


Kenneth L. Walters and Charles K. Bayne

Bulletin 136

Plate 2

State Geological Survey of Kansas

1954

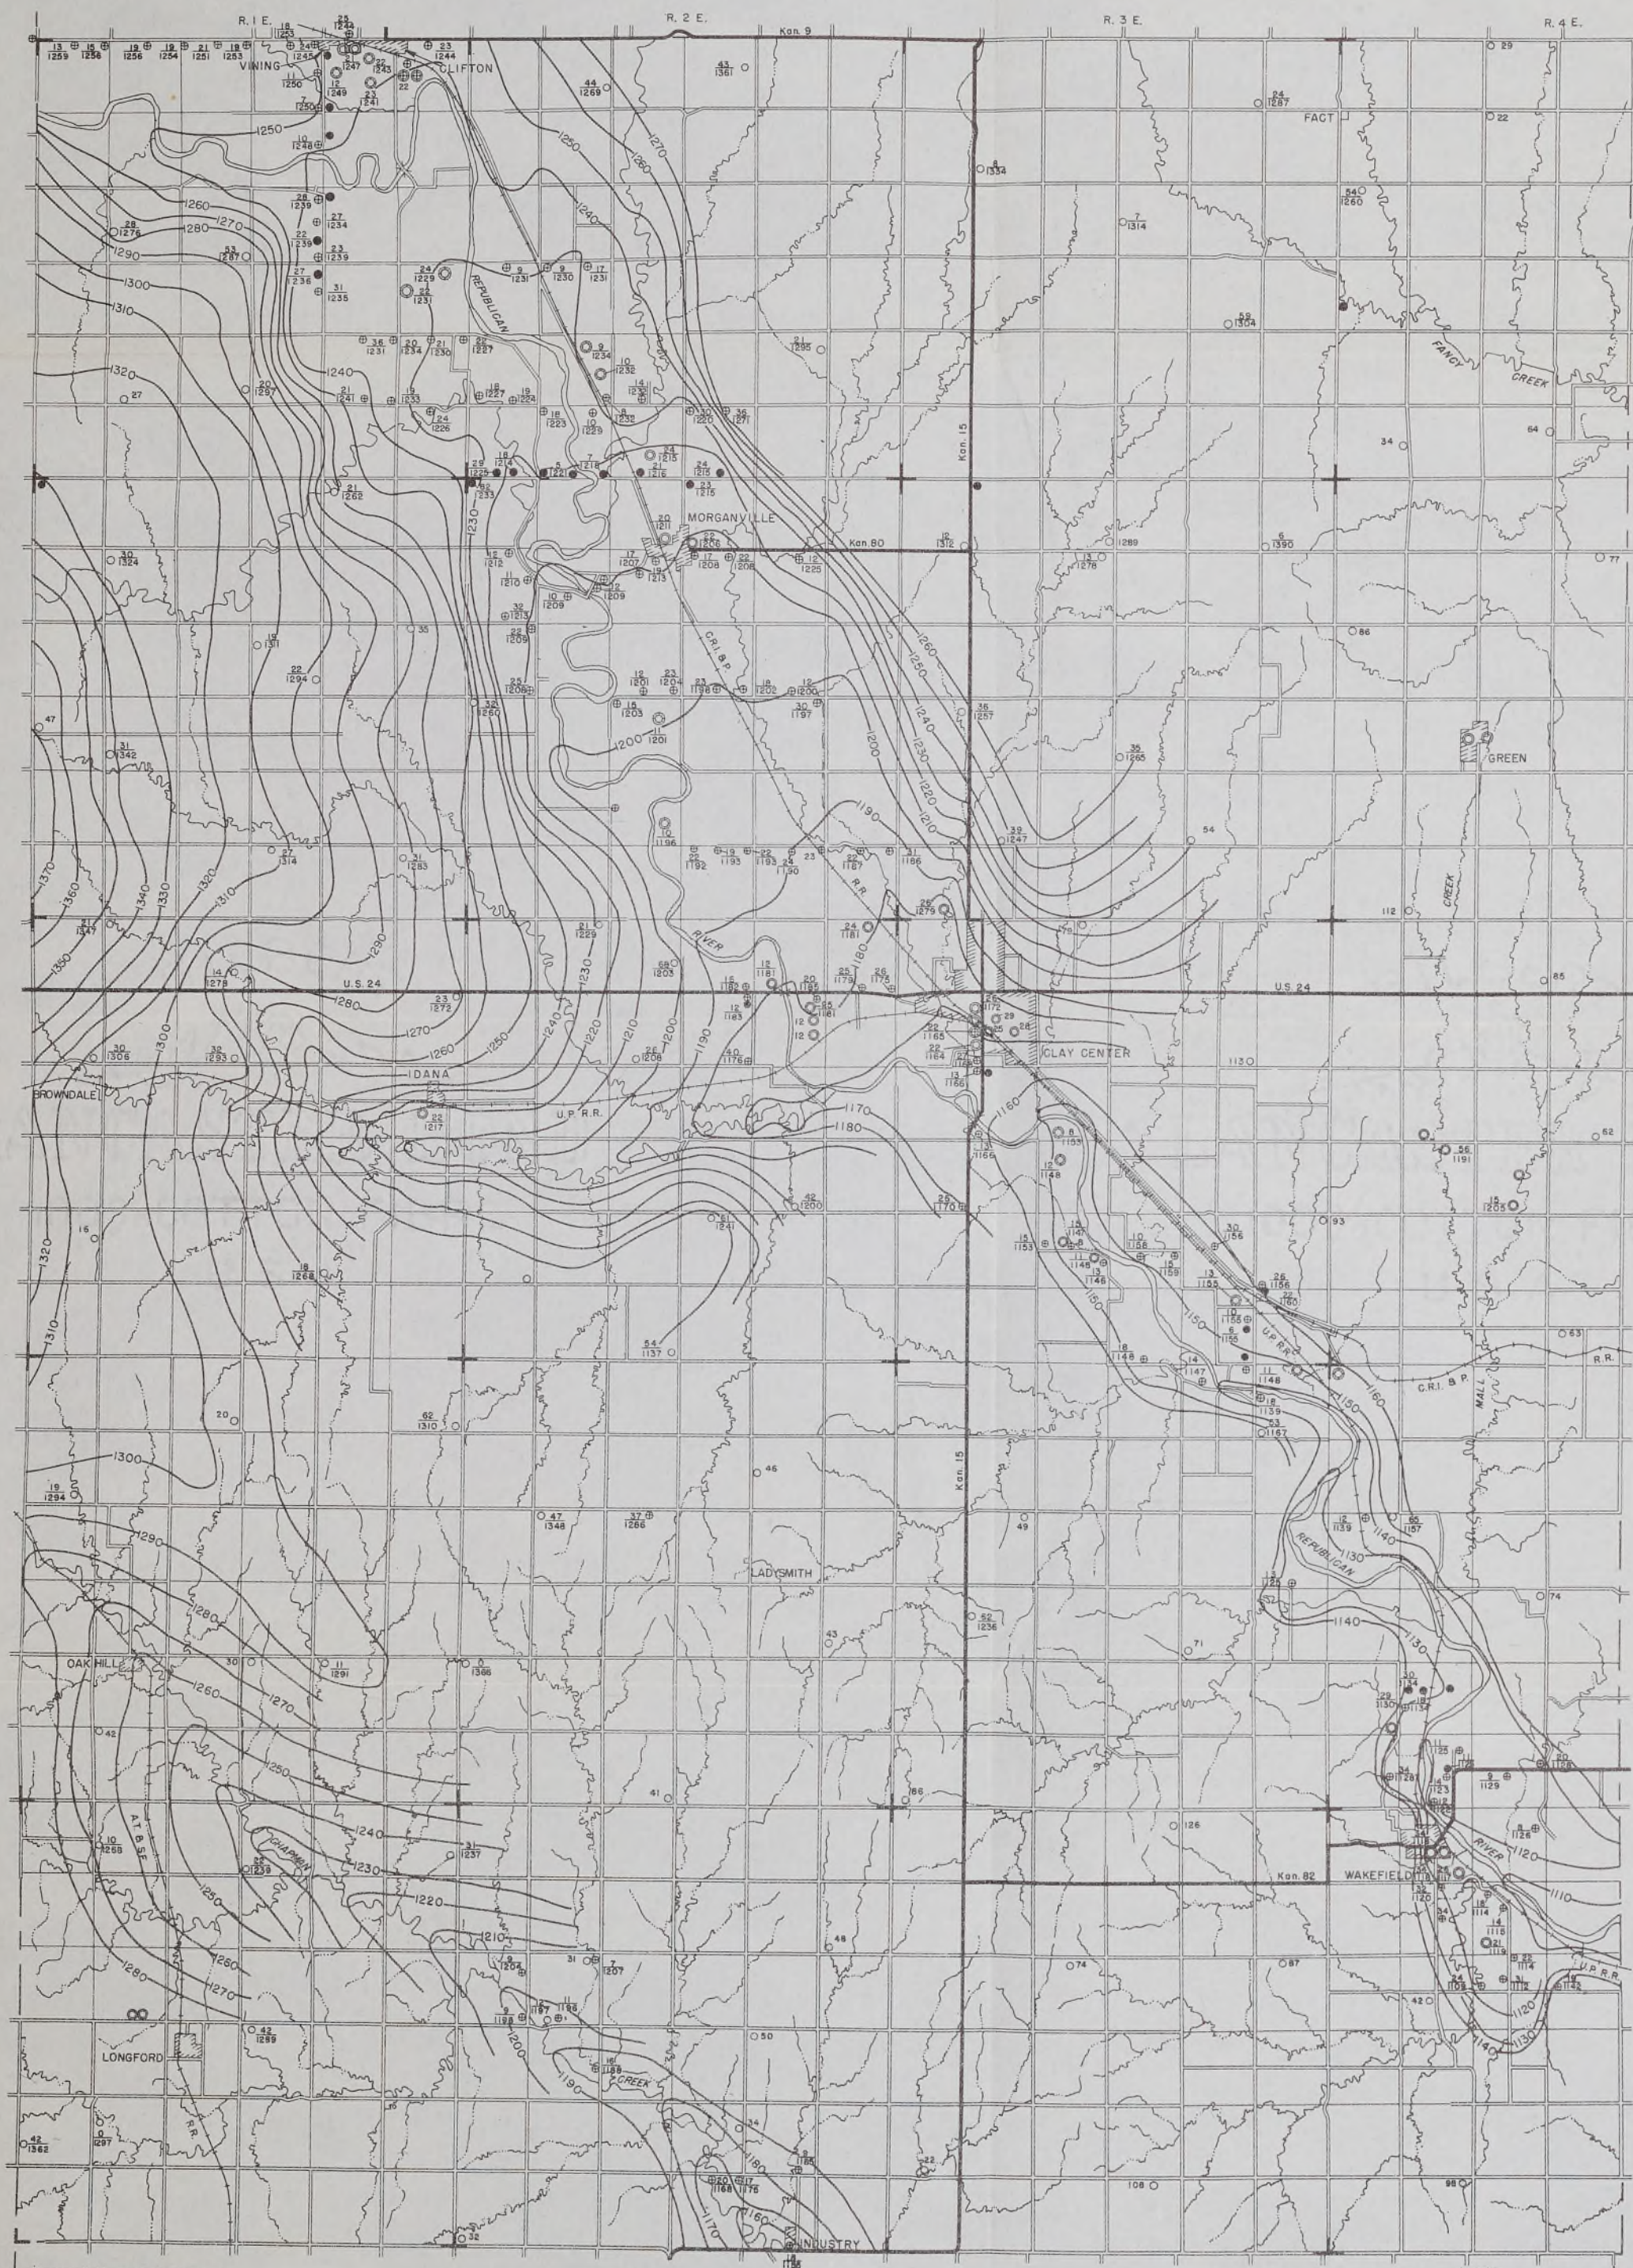

## EXPLANATION

- Domestic or stock well
- Drilled test hole
- ⊕ Augered test hole
- ⊗ Irrigation well
- ⊙ Public supply well
- ⊕ Industrial well
- ⊙ Spring

Upper number refers to depth to water level; lower number refers to altitude of water level.

1250 Water-table contours


- Federal or State Highway
- Graded road
- Railroad
- County line (no road)
- Township line (no road)
- Section line (no road)
- Intermittent stream

0 1 2 3 4  
SCALE, IN MILES

Base compiled from maps prepared by the Soil Conservation Service

Drainage from map prepared by U. S. Dept. of Agriculture




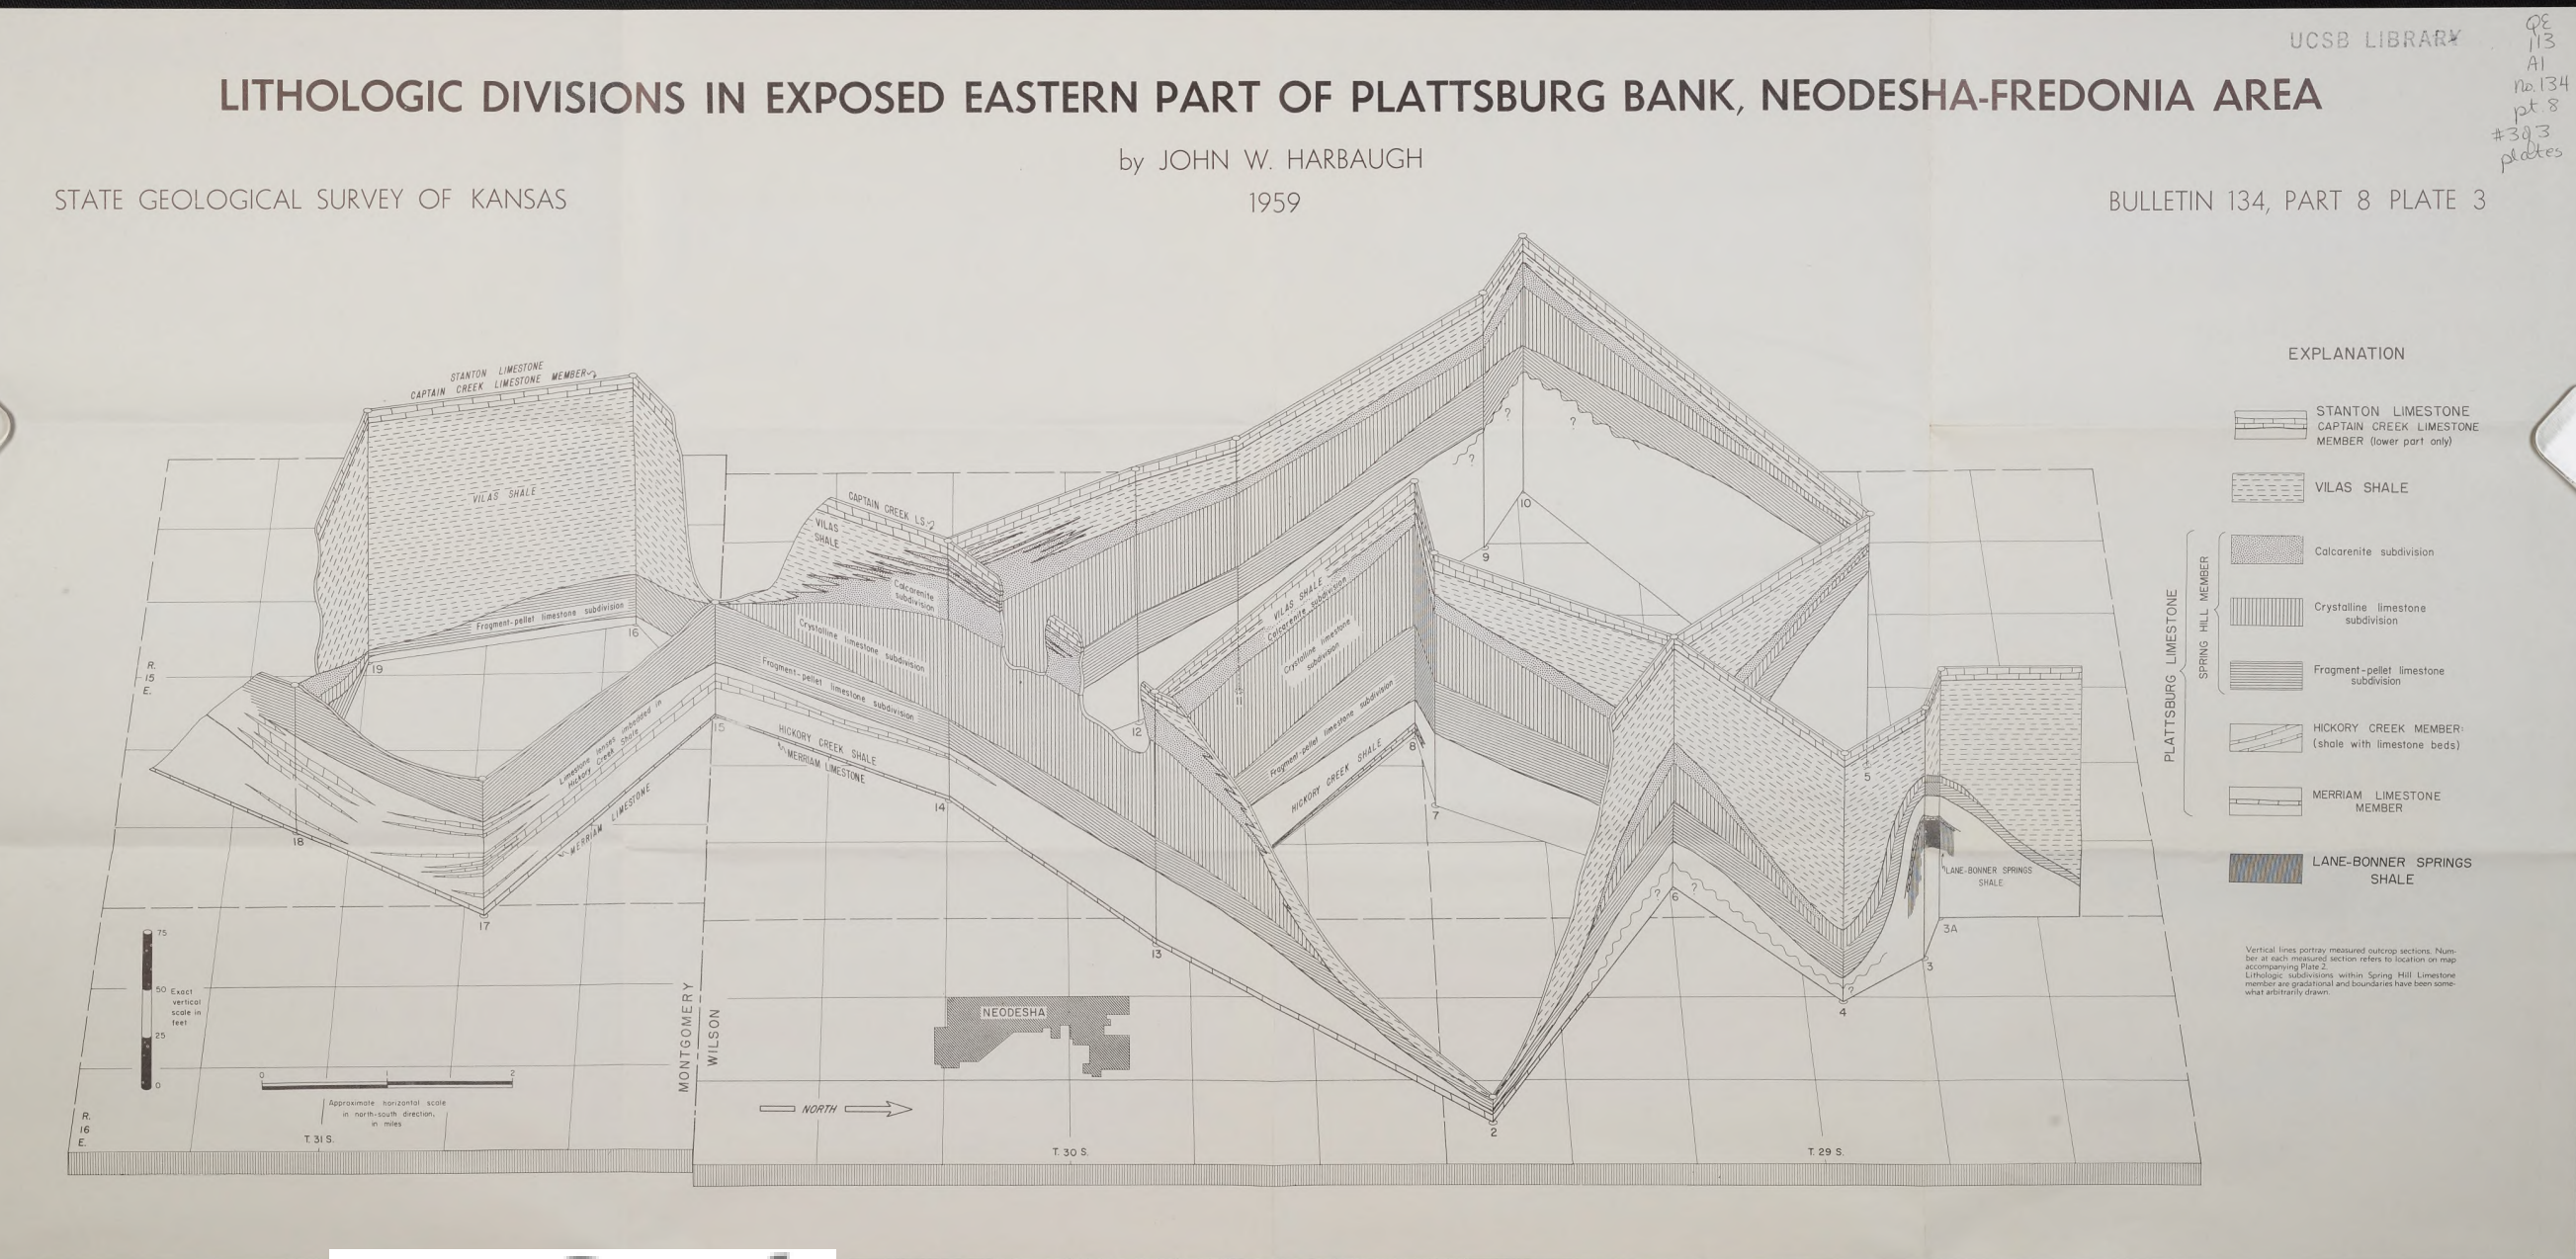



UCSB LIBRARY QE  
113  
A1  
no. 134  
pt. 6  
#1 of plate

Bulletin 134 Part 6, Plate 1





# NET THICKNESS OF SANDSTONE BELOW HASKELL LIMESTONE

UCSB LIBRARY

QE  
113  
A1  
no. 134  
pt. 3  
#202  
plates

State Geological Survey of Kansas

by Donald T. Sanders, 1957

Bulletin 134 Part 3, Plate 2





# NET THICKNESS OF SANDSTONE ABOVE HASKELL LIMESTONE


State Geological Survey of Kansas

by Donald T. Sanders, 1957

Bulletin 134 Part 3, Plate

JCSB LIBRARY

QE  
113  
A1  
no. 134  
pt. 3  
#102  
plates

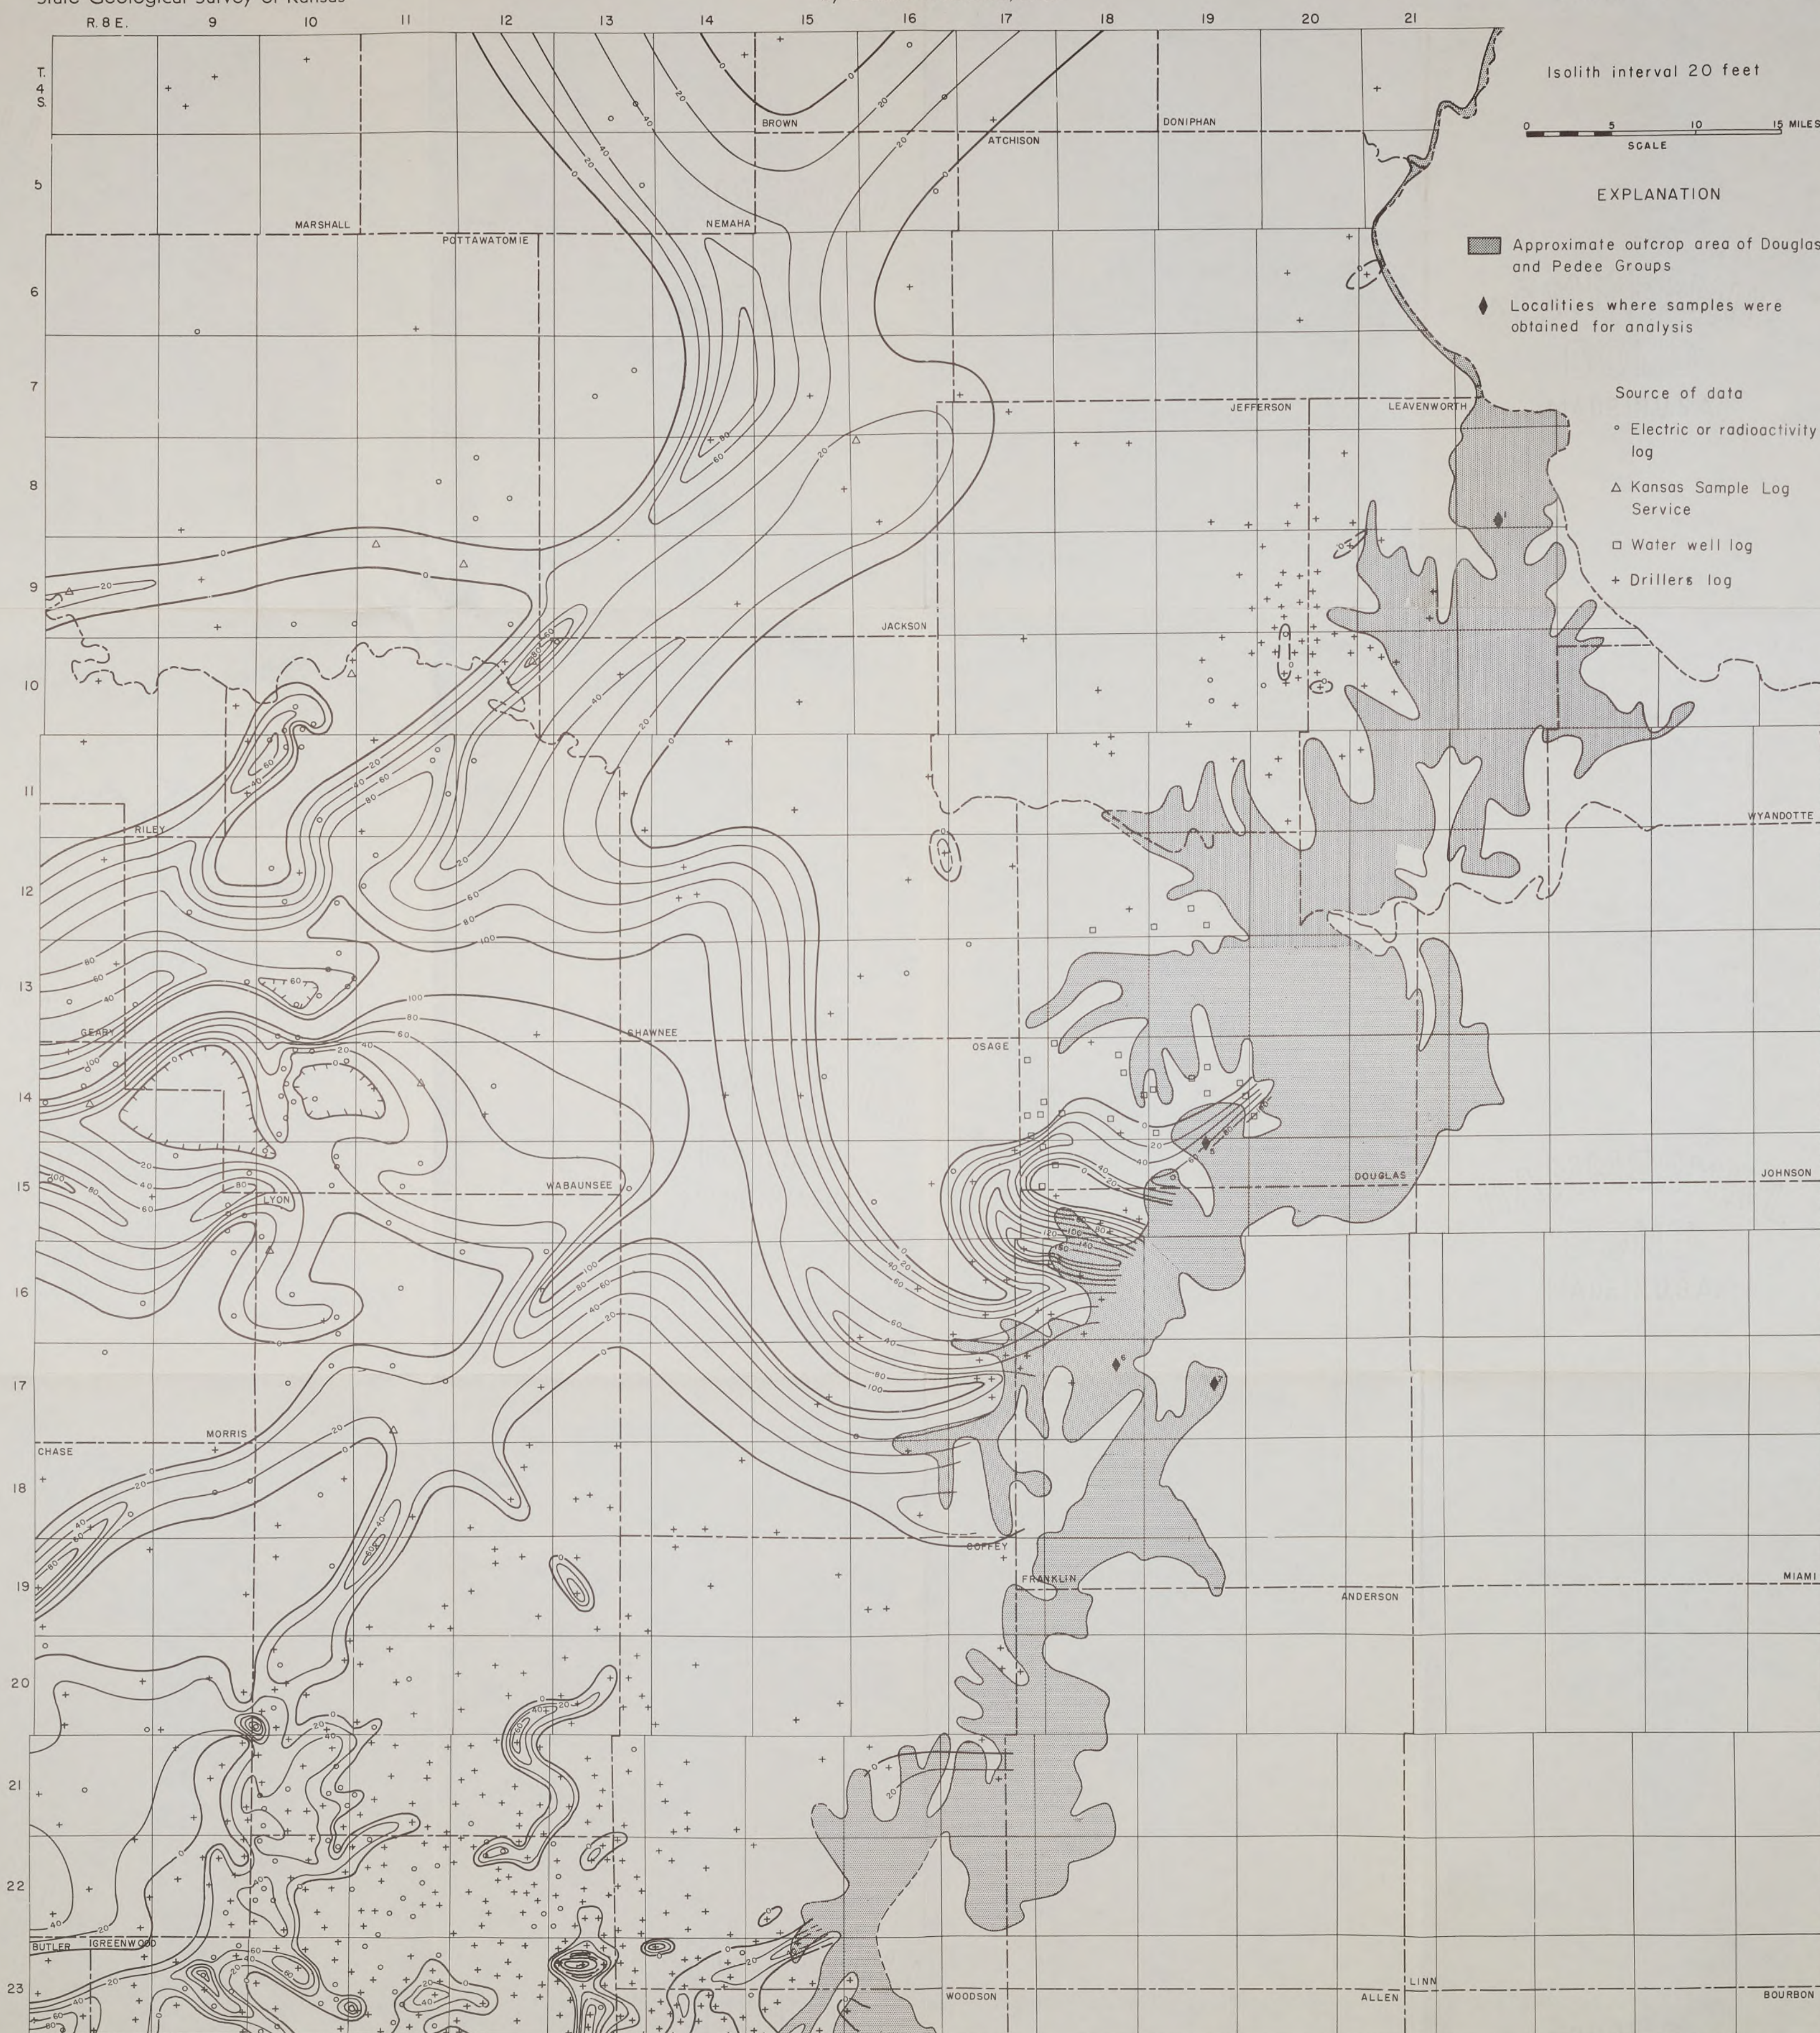



# Map of Bourbon and Crawford Counties, Kansas

Showing location of Mulky coal mines, reserve coal  
areas, and trace of the basal Fort Scott limestone



By Walter H. Schoewe  
1959

## EXPLANATION

- Mulky coal strip pits
- Drift or slope mines
- Trace of Mulky coal and base of Fort Scott Ls.
- U.S. and State highways

## Reserves:

- Measured
- Indicated



UCSB LIBRARY

R.25E.

T. 23 S.

T. 24 S.

T. 25 S.

T. 26 S.

T. 27 S.

T. 28 S.

T. 29 S.

MISSOURI

QE  
113  
A1  
no. 134  
pt. 5  
#101 plate




No.	Field	Operator	Project	Location	Cooperative or unitized	Year started	Total developed acres	Producing formation	Thickness of zone, feet	Average depth to producing zone, feet	Flooding	Pumping	Total	No. producing wells drilled in 1957	No. active injection wells, 1957	No. injection wells drilled in 1957	Medium of injection	Source of water	Average bbl. water injected per day	Estimated additional secondary recovery production, bbl.	Production attributable to recovery in 1957, bbl.	No.
ALLEN COUNTY																						
1	Bronson-Kenia	Ray Beers, Jr.	Southeastern Co. K-8 Project	4-25-21E	Coop.	1956	60	"Bartlesville"	13	765	0	11	11	2	6	2	Salt water	1,200 feet	28	-	-	1
2	do	do	do	22,27,28,33-24-21E	No	1951	220	do	18	700	0	132	132	3	117	10	do	Arbuckle	35	4,675	182,183	2
3	do	D and C Oil Co.	Horton Lease	34-24-21E	-	1955	-	do	12	695	-	-	-	-	-	-	Fresh and salt water	do	-	-	-	3
4	Elmore-Shoestring	Fess and Hoyt	Elmore Shoestring	3,4,10-26-21E	Unit.	1941	180	do	30	660	-	-	-	-	-	-	do	do	-	-	-	4
5	do	Pavlick Brothers	Trast and Gray Farms	16-26-21E	-	1944	-	do	28	700	0	9	9	-	-	-	Salt water	do	-	-	-	5
6	Hamboldt-Chanute	C and M Oil Co.	Hamboldt-Chanute	18,19-26-20E	Coop.	1953	40	do	13	700	-	-	-	-	-	-	Fresh water	Stream and well	-	-	-	6
7	do	Gamble, Wright and Cronley	Wolf-Tebay Lease	24-26-17E	Coop.	1953	160	do	30	840	-	-	-	-	-	-	Salt water	"Oswego line"	-	-	-	7
8	do	General American Oil Co. of Texas	Matson Group	16,17,18,19, 20-26-18E	No	1938	323	do	30	800	138	14	152	0	147	0	Fresh water	Neosho River	11	3,278	48,275	8
9	do	E. F. Gidley	Diamond	16-26-19E	No	1952	15	do	10	860	-	-	-	-	-	-	Salt water	Mississippian	-	-	-	9
10	do	Weiner Petroleum Co.	Hamboldt Water Flood	13,14,23,24-26-18E	No	1942	371	do	25	825	-	-	-	-	-	-	do	do	-	-	-	10
11	do	C. A. Willis	Hoepker	25-26-18E	-	1953	80	do	15	830	-	-	-	-	-	-	do	"Oswego line"	-	-	-	11
12	Moran	A. P. Brigham	Minslow	34,35-24-20E	-	1958	15	do	16-21	825	0	23	23	0	4	-	-	Estimated additional secondary recovery production	-	-	386,866	12
Totals									1,464													
									138 169 327 5 274 12													
ALLEN AND NEOSHO COUNTIES																						
13	Hamboldt-Chanute	C. P. M. Corp.	K. T. Unit	32,33-26-18E 4-27-18E	No	1956	45	"Bartlesville"	25	750	-	-	-	-	-	-	Salt water	Mississippian	-	-	-	13
ANDERSON COUNTY																						
14	Bush City Shoestring	Deep Rock Oil Corp.	Salmon Oil Corp.	7,8,15,16-21-20E	-	1949	371	"Squirrel"	20	800	-	-	-	-	-	-	Salt water	Arbuckle and Mississippian	-	-	-	14
15	do	General American Oil Co. of Texas	Reed Group and Connell and Lorisau Group	13,14-21-20E 4,5,7,8,18-21-21E	No	1939	967	do	30	620	399	18	417	0	389	0	do	Mississippian	22	2,437	140,627	15
16	do	Kewanee Oil Co.	Dengo Waterflood	27,28,32,33-20-21E 4-21-21E	Neither	1943	351	do	18	600	120	34	154	0	138	0	do	Arbuckle	6	2,668	59,284	16
17	do	Maracabo Oil Corp.	Starit	8,9,16,17-21-20E	No	1953	80	do	11	700	-	-	-	-	-	-	do	Purchased	-	-	-	17
18	Centerville	Schemmehorn Oil Corp.	Centerville	4,10,15,22-21-21E	Unit.	1947	345	"Bartlesville"	151	725	73	6	79	0	20	0	do	Mississippian	81	1,572	30,768	18
19	Colony-Welda	W. S. Fees	Stauffer-North Hyde Unit No. 1	22-22-19E 21,22,27,28-22-22-19E	Neither	1947	20	"Squirrel"	15	800	-	-	-	0	5	0	do	Arbuckle	13	3,484	1,852	19
20	do	W. S. Fees	Unit No. 2	28,29,32,33-22-19E	Unit.	1954	320	do	15	800	-	14	14	0	15	0	do	do	21	165	25,778	21
21	do	W. S. Fees	Unit No. 3	2,3-22-19E	Unit.	1956	219	do	14	825	0	0	0	4	22	22	do	Mississippian	26	.83	155,660	22
Totals									3,053													
									592 156 750 4 626 22													
BARBER COUNTY																						
23	DeGee	Lion Oil Co.	DeGee Unit	2,3-33-15W	Unit.	1954	920	Viola limestone	25	5,200	-	-	-	-	-	-	Salt water	Viola	-	-	-	23
BARTON COUNTY																						
24	West Great Bend	White Eagle Oil Co.	Flood No. 8	26-19-14W	Coop.	1957	60	Lansing-Kansas City	6	3,320	0	6	6	0	2	0	Fresh water	Sand	140	0	0	24
BOURBON COUNTY																						
25	Bronson-Kenia	A. B. McClains and Son	McClains Oil Lease	8-24-22E	-	1956	2	"Bartlesville"	10	550	0	8	8	3	2	0	-	Mississippian and return	-	-	-	25
26	Davis-Bronson	Albert Marham Oil Co.	Honeus Farm	11-24-21E	Neither	1955	40	do	21	670	-	-	-	-	-	-	Salt water	Mississippian	-	-	-	26
									42													
									Estimated additional secondary recovery production													
									24,032 24,032													
BUTLER COUNTY																						
27	Blankenship	Franco Central Oil Co.	Hughes	9-26-8E	Coop.	1951	80	"Bartlesville"	67	2,500	0	11	11	0	13	0	Salt water	Douglas sand	340	-	29,792	27
28	do	T. O. Lysterand, Jr.	Dunne	9-26-8E	Coop.	1953	35	do	30	2,500	-	-	-	-	-	-	do	Arbuckle	-	-	-	28
29	do	L. A. Seidenfeld	Sallyards Flood	9,16-26-8E	Coop.	1953	60	do	40	2,520	0	5	5	0	0	0	do	"Bartlesville" and Arbuckle	300	-	5,000	29
30	do	Schole Petroleum Co.	Sallyards Flood	6,9,17-26-8E	Coop.	1949	157	do	41	2,500	0	18	18	0	16	0	do	Arbuckle	75	4,730	27,800	30
31	El Dorado	Cities Service Oil Co.	Waterflood	25,36-29-4E 19,20,21,22, 27,28,29,30, 31,32,33,34-25-5E 5,6-26-5E	Coop.	1947	4,945	El Dorado shallow sand	16	650	0	655	655	108	287	32	do	Arbuckle and produced	166	1,092	1,827,032	31
32	do	do	Finney Simpson Waterflood	4,9-26-5E	Coop.	1950	210	Simpson sand	24	2,600	0	15	15	0	7	3	do	do	128	568	60,020	32
33	do	do	Koogler	17,18,19,20, 24-26-4E & 5E	Coop.	1948	1,720	Viola-Simpson	30	2,100	0	168	168	8	91	14	do	do	250	3,083	541,561	33
34	do	do	Marmaton Waterflood	21-25-5E	No	1955	60	Marmaton	30	2,100	0	6	6	0	6	0	do	Produced	151	811	20,341	34
35	do	do	Wilson Kansas City Waterflood	7,8,9-26-5E	Unit.	1956	320	Kansas City	20	2,000	0	21	21	1	8	3	do	do	134	225	69,269	35
36	do	do	Wilson Shallow	8,9-25-5E	Coop.	1954	400	El Dorado shallow sand	10	700	0	59	59	3	21	0	do	do	395	1,900	194,932	36
37	do	do	Wilson Simpson Waterflood	8,9-25-5E	Unit.	1955	120	Simpson sand	20	2,550	0	20	20	0	7	0	do	do	321	4,030	111,464	37
38	do	do	A. J. Shurway Pilot	11-26-4E	Coop.	1956	60	Lansing	23	1,650	0	7	7	0	1	0	do	Lansing and Arbuckle	462	Negligible	Negligible	38
39	do	Magnolia Petroleum Co.	Koogler No. 6	21,29,30-26-5E	Coop.	1951	260	Simpson	-	2,600	0	57	57	0	23	0	do	Arbuckle and produced	470	-	266,000	39
40	do	R. W. Musgrove	Bond	2-25-5E	-	1952	20	"Peru"	20	2,250	0	2	2	0	1	0	do	Viola	300	-	30	40
41	do	Skelly Oil Co.	Hazlett Shallow Waterflood	19-25-5E	Coop.	1954	160	El Dorado shallow sand	12	700	0	9	9	2	8	2	do	Viola line	140	474	20,163	41
42	do	do	Hill Shallow Waterflood	34-25-5E	Coop.	1957	30	El Dorado shallow sand	9	610	0	2	2	2	2	2	do	Purchased	124	184	5,528	42
43	do	do	Pape Waterflood	9-26-5E	Coop.	1950	30	Wilcox sand	30	2,550	0	3	3	0	1	0	do	do	268	1,840	5,673	43
44	do	Stelbar Oil Corp.	Stone Lease	2-25-5E	-	1953	-	"Peru"	40	2,150	-	-	-	-	-	-	do	Water sand	-	-	-	44
45	do	The Texas Co.	El Dorado Project	17-25-5E	Coop.	1954	170	Indian Cave	14	700	0	16	16	0	15	0	do	Viola, Mississippian and produced	150	-	84,258	45
46	Fox-Bush	Eckland Drilling Co.	-	24-28-5E	No	-	60	"Bartlesville"	10-20	2,800	-	-	-	-	-	-	do	do	-	-	-	46
47	do	Magnolia Petroleum Co.	North Fox-Bush Unit	23,24,25,26, 30-25-5E	Unit.	1951	563	do	-	2,760	0	61	61	1	33	0	Salt water	Arbuckle	455	-	286,000	47
48	do	Morrison Producing Co.	Fox Unit No. 1	1,2,11,12, 36-28 and 29-36	Unit.	1943	880	do	35	2,820	0	34	34	7	25	5	do	Wreford sandy lime	350	2,020	199,690	48
49	Haverhill	Cities Service Oil Co.	Haverhill Unit	15,22,27,34-27-5E	Unit.	1953	180	do	30	2,700	0	26	26	1	6	1	do	Arbuckle and produced	282	1,077	114,143	49
50	Hickory Creek	Nadel and Gussman	Hickory Creek Unit	11,14-28-5E	-	1957	240	"Bartlesville" sand	14	2,700	0	15	15	0	6	0	do	Arbuckle and "Bartlesville"	300	10	2,400	50
51	Snock-Sluss	Burton Oil Producing Co.	Falkenberg	8-26-4E	No	1953	200	"Bartlesville"	20	2,700	-	-	-	-	-	-	do	"Bartlesville"	-	-	-	51
52	do	L. A. Seidenfeld	Snock-Sluss Flood	8-26-4E	No	1953	80	do	20	2,700	-	-	-	-	-	-	do	do	-	-	-	52
53	do	Skelly Oil Company	Sluss Waterflood	25,26-26-5E	Coop.	1950	40	"Bartlesville" sand	40	2,710	0	3	3	0	2	0	do	Salt water sand	237	2,119	17,954	53
54	do	The Texas Co.	C. A. Snock Project	2-27-5E	-	1951	70	"Bartlesville"	35	2,700	0	5	5	0	2	0	do	Kansas City and produced	427	-	3,167	54
55	Snowden-McSweeney	Rex and Morris Drig. Co.	Munch	6-29-6E	No	1953	120	do	25	2,800	-	-	-	-	-	-	do	Produced	-	-	-	55
									11,270													
									0 1,220 1,220 133 562 64													
BUTLER AND COMBLE COUNTIES																						
56	Combs	Kewanee Oil Co.	Dillard Waterflood	32,33-29-5E 4,5-30-5E	Neither	1954	210	"Bartlesville" sand	9	2,830	0	16	16	0	7	0	Salt water	Shallow sand	220	756	72,426	56
BUTLER AND GREENWOOD COUNTIES																						
57	Blankenship and Sallyards	Tidewater Oil Co.	Blankenship and Sallyards Waterflood	1,2,3,9,10, 16,17,21-26-8E 25,36-22-8E	Coop.	1949	1,150	"Bartlesville" sand	36	2,450	0	85	85	5	82	6	Salt water	Arbuckle and "Bartlesville" return	134</			



No.	Field	Operator	Project	Location	Cooperative or unitized	Year started	Total developed acres	Producing formation	Thickness of zone, feet	Average depth, feet	Flowing	Pumping	Total	No. producing in 1957	No. active injection wells, 1957	No. injection wells drilled in 1957	Medium of injection	Source of water	Average bbl. water injected per well per day	Cumulative secondary oil recovery per acre, bbl.	Production attributable to secondary recovery in 1957, bbl.	No.		
118	do	do	McGillvray Unit	8,9,16,17-23-11E	Unit.	1948	379	do	37	1,950	0	35	35	0	18	4	do	do	320	4,176	376,888	118		
119	do	do	York, DeMalorie and O'Neal Unit	32-22-11E	Unit.	1937	178	do	47	1,950	0	18	18	0	16	0	do	Douglas and produced	240	8,833	37,301	119		
120	do	Skelly Oil Co.	Wick Waterflood Project	22,27,34-22-11E	Coop.	1943	570	"Bartlesville" sand	20	1,959	1	23	24	0	17	0	do	Douglas water sand	288	2,460	85,310	120		
121	Teeter	Cities Service Oil Co.	Teeter Unit	10,11,14,15, 16-23-9E	Unit.	1947	760	do	37	2,470	0	76	76	4	34	5	do	Arbuckle and produced	226	1,121	254,313	121		
122	do	Kirkpatrick & McGuire	Refiners Oil-Morris-McGinnis Hartley Waterflood	20,21-23-9E	-	1951	92	"Bartlesville"	36	2,550	0	5	5	0	4	0	do	Douglas sand	260	635	14,644	122		
123	do	Skelly Oil Co.	2-23-9E	-	1944	30	"Bartlesville"	45	2,350	0	2	2	0	1	0	0	do	Salt water sand	289	6,440	5,441	123		
124	Thrall-Asgard	Arkansas Fuel Oil Corp.	E. Marshall	1-24-9E	No	1944	84	"Bartlesville"	37	2,300	0	9	9	0	6	0	do	Douglas	169	5,222	16,664	124		
125	do	The Ohio Oil Co.	Martindale-Teeter	31-23-10E	No	1948	377	do	50	2,300	0	43	43	1	37	0	do	Arbuckle and Douglas	124	5,425	119,951	125		
126	do	do	Olson-Anderson	11-24-9E	Unit.	1944	98	do	42	2,300	0	7	7	0	0	0	do	Douglas sand	194	7,202	6,669	126		
127	do	Phillips Petroleum Co.	Cartwright Unit	36-23-9E; 1-24-9E; 6-24-10E	Unit.	1952	196	do	35	2,200	0	24	24	3	14	0	do	Arbuckle and produced	360	4,316	150,796	127		
128	do	do	Lewis and Cannon Unit	11,12-24-9E	Unit.	1945	95	do	50	2,300	0	12	12	2	8	0	do	Douglas and produced	200	7,445	48,703	128		
129	do	Sinclair Oil and Gas	Thrall-McKee Consolidated	28,29,30,32, 33-23-10E	Unit.	1949	644	do	31	2,300	26	46	72	0	48	0	do	do	239	4,777	-	129		
130	Virgil	Alf M. Landon	Hamilton Leases Water Flood	15,16,21,22-24-12E	No	1951	60	do	20	1,615	0	37	37	0	4	0	do	Arbuckle and Douglas sand	697	-	1,000	130		
131	Wiggins	Glenwood Oil Co.	Wiggins Water Flood	25,36-24-10E 19,30,31-24-11E	No	1956	547	"Cattlemen" sand	17	1,800	0	46	46	14	22	9	do	Douglas sand	375	505	252,600	131		
										11,250											Estimated additional secondary recovery production			1,512,407
																					5,874,961			
										GREENWOOD AND WOODSON COUNTIES														
132	Quincy	Delhi-Taylor Oil Co.	South Quincy	14,15-25-13E	Coop.	1948	160	"Bartlesville" shoestring	15	1,500	0	12	12	0	19	1	Salt water	Arbuckle	104	960	40,126	132		
										KINGMAN AND PRATT COUNTIES														
133	Cunningham	Skelly Oil Co.	Cunningham Pressure Maintenance Project	19,20,29,30, 31-27-10,11W	-	1936	1,400	Lansing limestone	16	3,400	0	64	64	0	5	0	Gas	do	453 MCF	1,539	79,725	133		
										LABETTE COUNTY														
134	Edna	Veeder Supply and Dev. Co.	Brown-Wilmoth	12,13-34-18E	No	1954	22	"Bartlesville"	10	560	0	5	5	0	4	0	Salt water	Arbuckle	20	958	6,120	134		
										LINN COUNTY														
135	Goodrich-Parker	General American Oil Co. of Texas	Goodrich Group	19,20,29,30-20-22E	No	1944	211	"Squirrel"	30	570	83	16	99	0	99	0	Salt water	Mississippian line	16	1,690	26,977	135		
136	LaOgne-Cadmus	do	LaOgne Group	34,35,36-19-23E; 2,3-20-23E	No	1942	81	"Frue"	20	250	23	27	50	0	46	0	do	Wilcox sand	22	1,762	12,441	136		
										292											Estimated additional secondary recovery production			32,108
																					71,823			
										LYON COUNTY														
137	Atyeo-Pixlee	Barbara Oil Company	Jones Water Flood	30-21-10E	Coop.	1948	50	"Bartlesville"	30	2,200	0	5	5	0	3	0	Salt water	Arbuckle and "Bartlesville"	238	2,953	10,655	137		
138	do	The Ohio Oil Co.	Ohio Communication	30,31-21-10E	No	1945	280	do	35	2,200	0	33	33	0	26	0	do	do	172	5,809	67,464	138		
139	Fankhauser	W. M. Michell	Jack-Childers	32-21-12E	Coop.	1956	-	do	40	1,950	-	-	-	-	-	-	do	"Bartlesville"	-	-	-	139		
										330											Estimated additional secondary recovery production			41,607
																					119,156			
										MCPherson COUNTY														
140	Graber	Cities Service Oil Co.	Graber	31,32-21-1W	Coop.	1952	30	"Hunton"	25	3,285	0	3	3	0	1	0	Fresh water	Shallow water sand	67	3,221	12,924	140		
141	do	Continental Oil Co.	Graber Pool Water Flood	20,29,32-21-1W	Coop.	1947	1,400	do	16	3,200	-	-	-	-	-	-	Salt and fresh water	"Hunton", Kansas City and fresh water	-	-	-	141		
										1,430														12,924
										MEADE COUNTY														
142	Novinger	Columbian Fuel Corp.	Novinger Unit	2,3,22,23,26, 27,34,35-33, 34-30W	Unit.	1956	1,470	Marmaton	15	5,300	10	19	29	0	5	0	Fresh water	Meade water sand	2,696	-	-	142		
										MIAMI COUNTY														
143	Paola-Rantoul	A. L. Anderson and H. W. Wright	Big Lake Development	20,29-16-24E	Coop.	1953	370	"Peru"	35	400	0	100	100	34	100	16	Salt water	Arbuckle	7,000	900	72,000	143		
144	do	W. M. Dary	Alvord and Minden Farms	11-17-22E	No	1953	20	"Squirrel"	20	630	-	-	-	-	-	-	do	Mississippian line	-	-	-	144		
145	do	Robert I. Nicholson	NYK No. 2-Season Group	11-17-22E	No	1956	8	"Bartlesville"	10	600	-	-	-	-	-	-	do	do	-	-	-	145		
146	do	General American Oil Co. of Texas	Producers Group	22,23,26,27-18-22E	No	1944	287	"Peru"	20	350	105	0	105	0	99	0	do	Arbuckle	32	1,246	18,559	146		
147	do	do	Producers Group	19,16,21,22, 26,27-17-22E	No	1945	627	do	14	350	186	1	187	0	196	0	do	Mississippian	36	985	45,313	147		
148	do	J. C. Hart	Hart and Buster	10-17-22E	No	1955	80	"Squirrel" sand	23	750	0	40	40	3	19	5	do	Heartha line	15	300	29,616	148		
149	do	Kirk Johnson	Klein	26-16-21E	Coop.	1948	40	"Squirrel"	10	625	-	-	-	-	-	-	do	Pennsylvanian line	-	-	-	149		
150	do	Maracaibo Oil Corp.	Units 1, 2, and 3	11,13,14,23, 24-25,26,32-16-21E; 31-16-22E; 5,6, 8,9-17-22E	Unit.	1948	500	do	30	600	-	-	-	-	-	-	do	Arbuckle	-	-	-	150		
151	do	C. P. Weisner	Phillips Unit	24-16-21E	No	1956	140	do	12	670	-	-	-	-	-	-	do	do	-	-	-	151		
										2,072											Estimated additional secondary recovery production			230,525
																					396,013			
										MONTGOMERY COUNTY														
152	Caney	Alpine Oil and Gas Corp.	Roper	34-34-14E; 4-35-14E	No	1953	20	"Bartlesville"	18	1,240	0	10	10	0	2	0	Salt water	Return salt	34	-	-	152		
153	Coffeyville-Cherryvale	Atlantic Refining Co.	Coffeyville	17,19,20,30-34-17E	No	1954	9	do	20	600	-	-	-	-	-	-	Fresh water and produced	River	-	-	-	153		
154	do	E. W. Hayes	do	7-34-17E	-	1946	60	"Peru"	20	330	-	-	-	-	-	-	Salt and Fresh water	Formation and City of Coffeyville	-	-	-	154		
155	do	do	Rector Field	9,10-34-17E	No	1946	60	do	20	320	-	-	-	-	-	-	do	Arbuckle and formation	-	-	-	155		
156	do	Layton Oil Co.	Schaub, Frost, Benson, Provorse and Jackson	10-32-17E	-	1955	50	"Bartlesville"	18	700	0	29	29	6	34	6	do	City of Independence	54	1,101	37,600	156		
157	Jefferson-Sycamore	do	do	11,14-33-15E	-	1955	50	do	25	1,109	-	-	-	-	-	-	Fresh water	City of Independence	-	-	-	157		
158	do	Kirkpatrick and McGuire	Produce Recovery, Inc.	22-33-15E	-	1952	12	do	20	1,153	0	4	4	0	1	0	Fresh and salt water	do	94	-	-	158		
159	Neodesha	Layton Oil Co.	Flood 11	12-31-16E	No	1952	55	do	12	915	-	-	-	-	-	-	Salt water	Arbuckle	-	-	-	159		
160	do	Omega Oil Co., Inc.	Gray	16-31-16E	Unit.	1956	20	"Weiser" sand	18	500	-	-	-	-	-	-	Salt and fresh water	Formation and well	-	-	-	160		
161	Wayside-Havana	Alpine Oil and Gas Corp.	Alpine Fee No. 2	34-33-14E	No	1949	20	"Wayside"	18	860	0	18	18	1	2	0	Salt water	Return salt	26	1,359	-	161		
162	do	Consolidated Gas, Oil and Mfg. Co.	Well No. 1 and 2	10,11-34-14E	No	1944	47	do	22	637	6	13	19	0	9	0	Salt and fresh water	Wells and Return	16	2,756	-	162		
163	do	do	Flanagan No. 1 and 2	10,11-34-14E	No	1942	105	do	22	637	10	38	38	0	25	0	do	do	17	2,566	-	163		
164	do	do	Hawner	33-33-14E	No	1953	95	do	22	680	26	6	17	1	1	0	do	do	23	537	14,943	164		
165	do	do	do	11-34-14E	No	1945	40	do	22	636	0	16	16	0	10	0	do	do	20	2,923	165	165		
166	do	Forest Oil Corp.	Flood No. 32	14,23-34-14E	No	1955	117	"Wayside" sand	20	635	0	45	45	4	29	6	Salt water	Big sand (salt) and return water	20	618	-	166		
										860											Estimated additional secondary recovery production			207,006
																					271,993			
										MONTGOMERY AND LABETTE COUNTIES														
167	Coffeyville-Cherryvale	Buffalo Oil Co.	Old Project	26,27-32-17E	Coop.	1955	5	"Bartlesville" sand	15	700	-	-	-	-	-	-	Salt water	Mississippian and produced	-	-	-	167		
168	do	do	Price Project	26,27-32-17E	Coop.	1955	3	"Dennis" sand	25	200	-	-	-	-	-	-	do	do	-	-	-	168		
																					Estimated additional secondary recovery production			(62,284)
										NEOSHO COUNTY														
169	Erie	Earl Seeler	Barnhart, Erney and Faust	34,35-28-20E	Unit.	1953	40	"Bartlesville"	25	500	-	-	-	-	7	0	Fresh water	City water and lime	-	-	-	169		
170	do	J. O. Purviance	Edwards and Purviance	14,15-20-18E	Unit.	1949	60	do	15	600	0	16	16	0	-	0	do	Cherokee shale	12	-	-	170		
171	Hamboldt-Chanute	Belleair Oil Corp.	Gensse Block	7,18-27-20E	No	1953	40	do	14	750	-	-	-	-	-	-	Salt water	Mississippian line	-	-	-	171		
172	do	do	Welner Block	4,9-27-18E	No	1951	150	do	18	750	-	-	-	-	-	-	do	do	-	-	-	172		
173	do	C. P. M. Corp.	Chanute Flood	1,2,10,11,12, 14,15,22,23, 27,28-27-18E; 6,7-27-19E	No	1936	1,000	do	30	760	-	-	-	-	-	-	Salt and fresh water	Return and Neosho River	-	-	-	173		



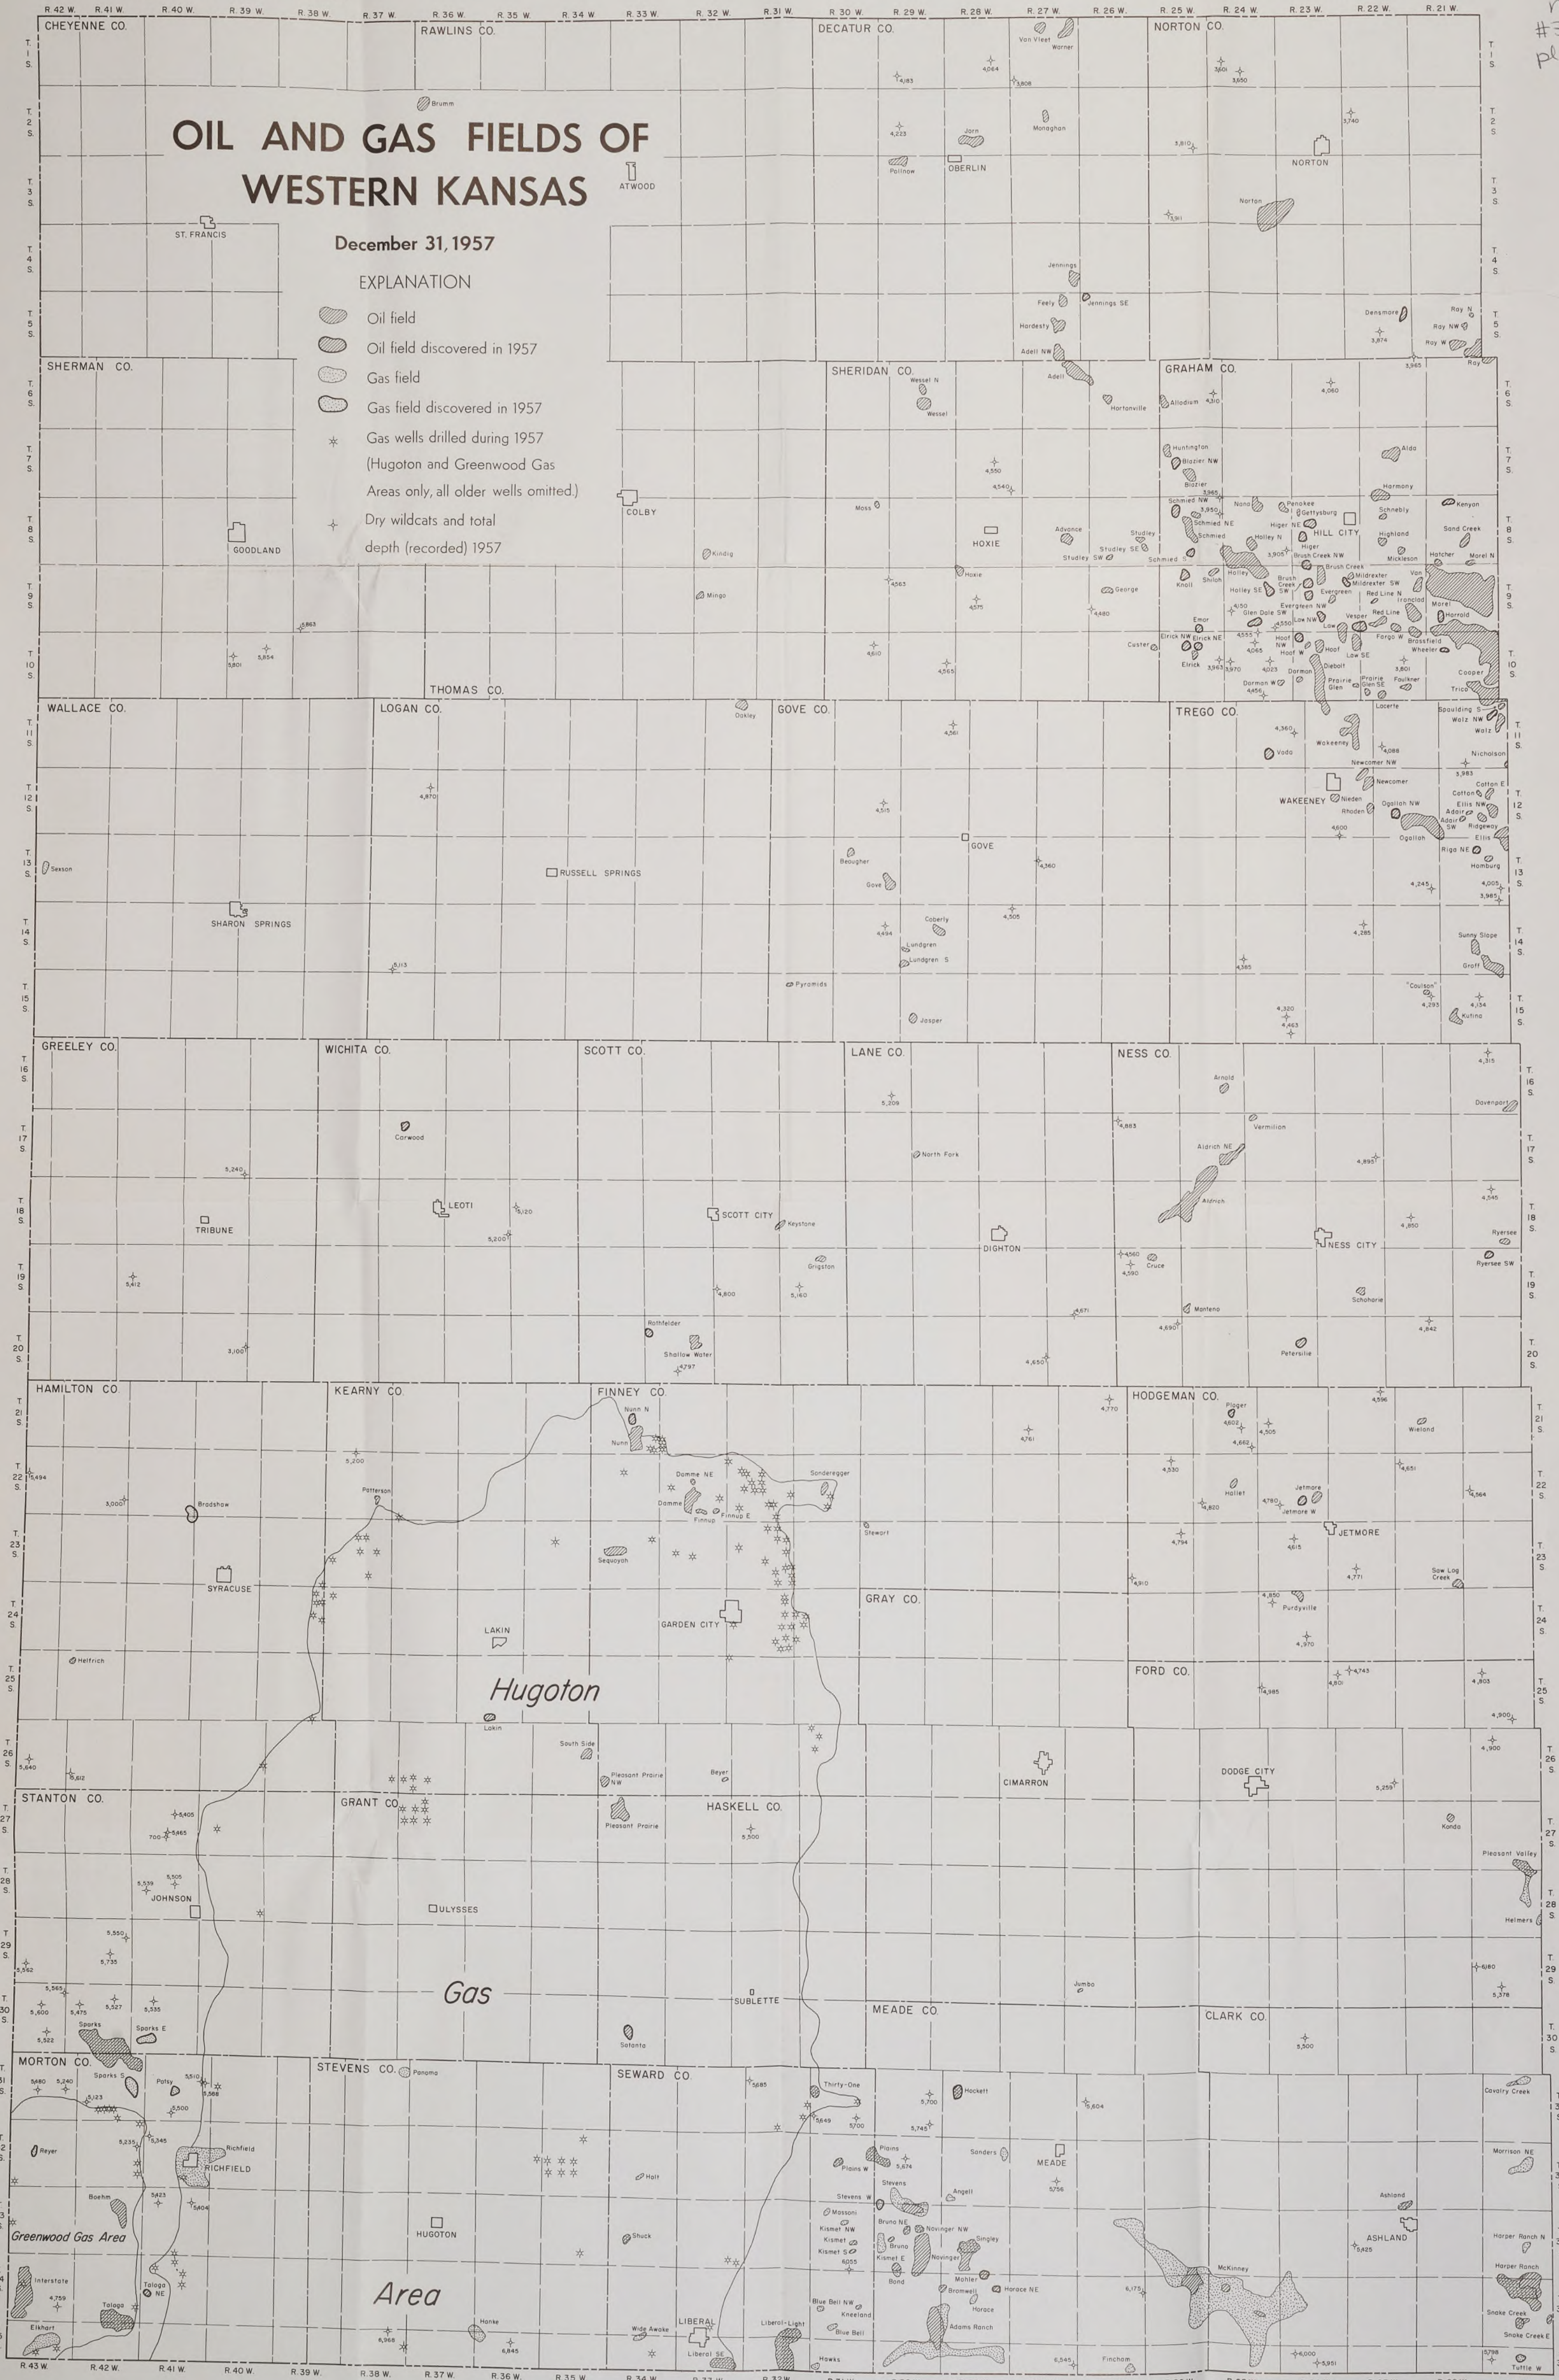






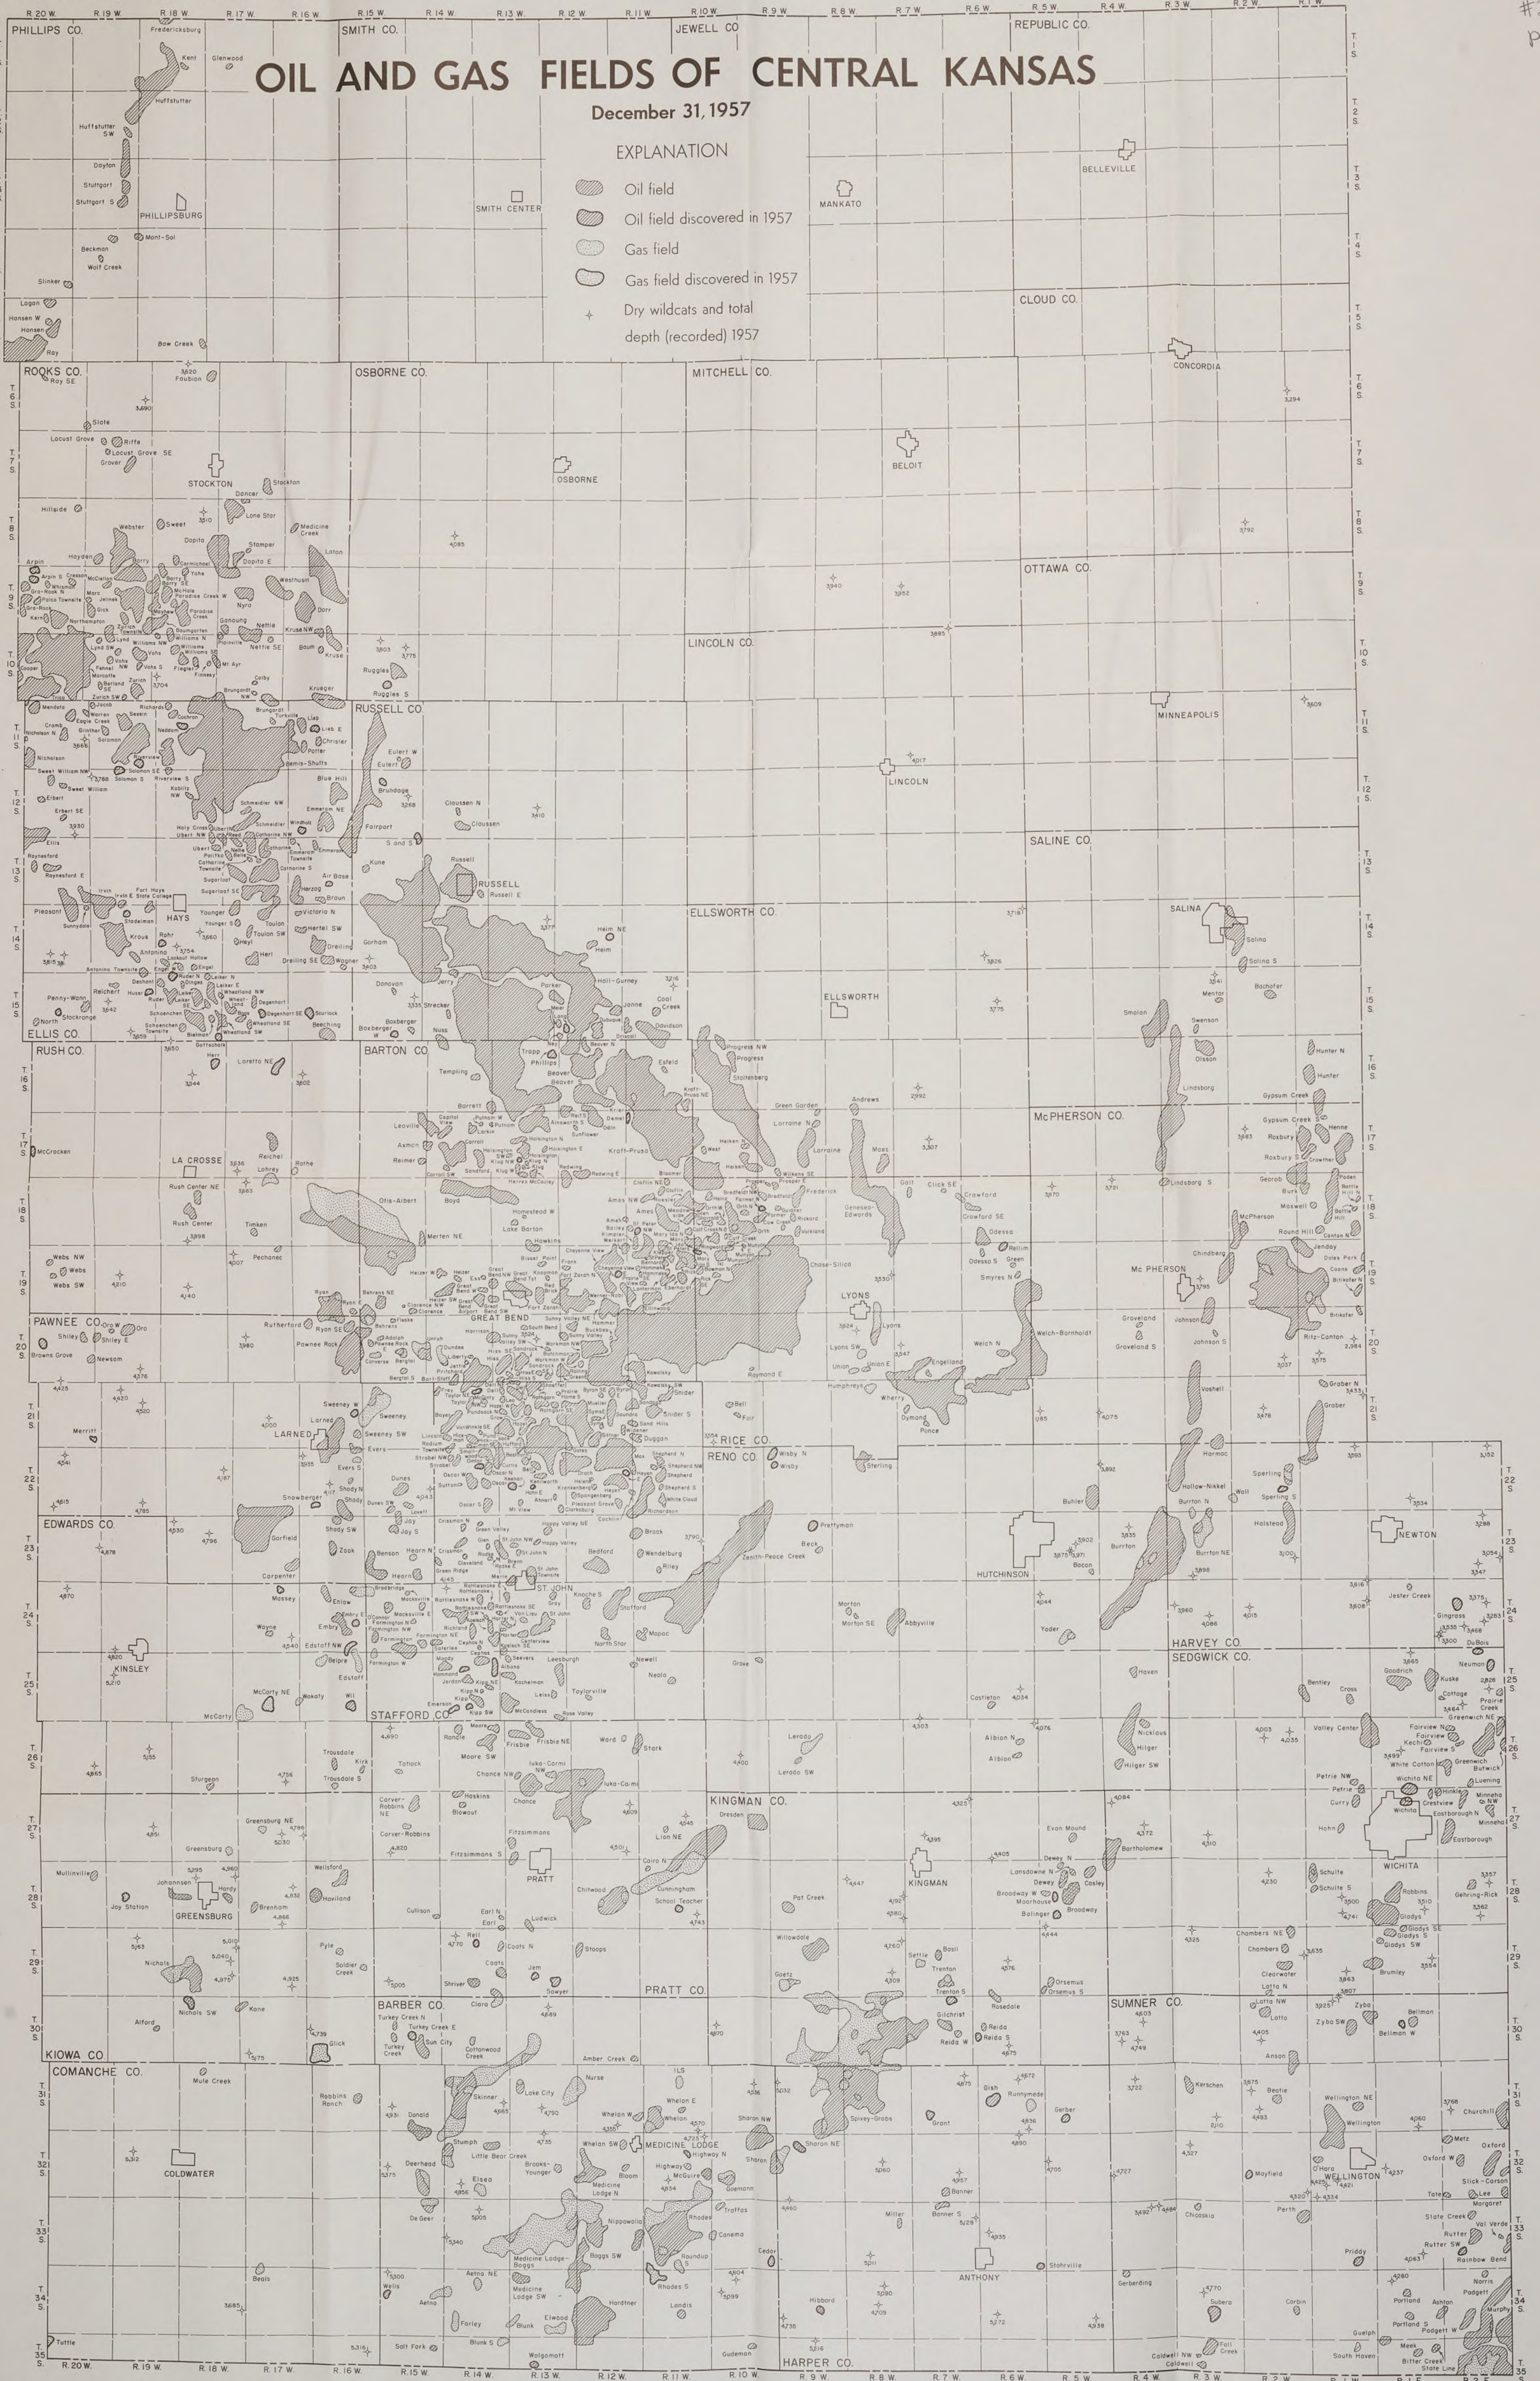


## OIL AND GAS FIELDS OF CENTRAL KANSAS

December 31, 1957

## EXPLANATION

-  Oil field
-  Oil field discovered in 1957
-  Gas field
-  Gas field discovered in 1957
-  Dry wildcats and total depth (recorded) 1957





# EASTERN KANSAS OIL-PRODUCING AREAS

December 31, 1957

EXPLANATION  
Oil field  
Oil field discovered in 1957  
Dry wildcats and total depth (recorded) 1957





## Plate 3

Geological cross-section of the Republic River area, showing various geological formations and their altitudes. The cross-section is divided into three main sections: Pleistocene/Quaternary, Permian, and Cretaceous.

**Legend:**

- QUATERNARY**
  - terrace deposits (stippled pattern)
  - Sanborn Group (horizontal dashed lines)
  - Illinoisian terrace deposits (stippled pattern with dots)
  - Meade Group (solid grey)
  - Dakota Formation (diagonal lines)
- PERMIAN**
  - Niobrara Limestone (horizontal dashed lines)
  - Odell Shale (horizontal solid lines)
  - Winfield Limestone (horizontal dashed lines)
  - Doyle Shale (horizontal solid lines)
- CRETACEOUS**
  - Dakota Formation (diagonal lines)

**Altitude Scale (Feet):** 1130 to 1370.

**Geological Features and Labels:**

- Republic River** (centered in the cross-section)
- 7-1-6bb** (top left corner)
- 7-2-4bb** (top right corner)
- 7-3-4bb** (bottom right corner)
- 6-2-31cd**, **6-2-31dc**, **6-2-32cc**, **6-2-32cd**, **6-2-32dd**, **6-2-32cd**, **7-2-3bb**, **6-2-34cd** (vertical labels along the cross-section)
- Qs**, **Qd**, **Qm**, **Psw**, **Pw**, **Pwo**, **Pww**, **Pwd** (geological unit labels)

**Grid:** A grid is shown on the right side of the cross-section, with labels A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z, AA, AB, AC, AD, AE, AF, AG, AH, AI, AJ, AK, AL, AM, AN, AO, AP, AQ, AR, AS, AT, AU, AV, AW, AX, AY, AZ, BA, BB, BC, BD, BE, BF, BG, BH, BI, BJ, BK, BL, BM, BN, BO, BP, BQ, BR, BS, BT, BU, BV, BW, BX, BY, BZ, CA, CB, CC, CD, CE, CF, CG, CH, CI, CJ, CK, CL, CM, CN, CO, CP, CQ, CR, CS, CT, CU, CV, CW, CX, CY, CZ, DA, DB, DC, DD, DE, DF, DG, DH, DI, DJ, DK, DL, DM, DN, DO, DP, DQ, DR, DS, DT, DU, DV, DW, DX, DY, DZ, EA, EB, EC, ED, EE, EF, EG, EH, EI, EJ, EK, EL, EM, EN, EO, EP, EQ, ER, ES, ET, EU, EV, EW, EX, EY, EZ, FA, FB, FC, FD, FE, FF, FG, FH, FI, FJ, FK, FL, FM, FN, FO, FP, FQ, FR, FS, FT, FU, FV, FW, FX, FY, FZ, GA, GB, GC, GD, GE, GF, GG, GH, GI, GJ, GK, GL, GM, GN, GO, GP, GQ, GR, GS, GT, GU, GV, GW, GX, GY, GZ, HA, HB, HC, HD, HE, HF, HG, HH, HI, HJ, HK, HL, HM, HN, HO, HP, HQ, HR, HS, HT, HU, HV, HW, HX, HY, HZ, IA, IB, IC, ID, IE, IF, IG, IH, II, IJ, IK, IL, IM, IN, IO, IP, IQ, IR, IS, IT, IU, IV, IW, IX, IY, IZ, JA, JB, JC, JD, JE, JF, JG, JH, JI, JJ, JK, JL, JM, JN, JO, JP, JQ, JR, JS, JT, JU, JV, JW, JX, JY, JZ, KA, KB, KC, KD, KE, KF, KG, KH, KI, KJ, KK, KL, KM, KN, KO, KP, KQ, KR, KS, KT, KU, KV, KW, KX, KY, KZ, LA, LB, LC, LD, LE, LF, LG, LH, LI, LJ, LK, LL, LM, LN, LO, LP, LQ, LR, LS, LT, LU, LV, LW, LX, LY, LZ, MA, MB, MC, MD, ME, MF, MG, MH, MI, MJ, MK, ML, MM, MN, MO, MP, MQ, MR, MS, MT, MU, MV, MW, MX, MY, MZ, NA, NB, NC, ND, NE, NF, NG, NH, NI, NJ, NK, NL, NM, NN, NO, NP, NQ, NR, NS, NT, NU, NV, NW, NX, NY, NZ, OA, OB, OC, OD, OE, OF, OG, OH, OI, OJ, OK, OL, OM, ON, OO, OP, OQ, OR, OS, OT, OU, OV, OW, OX, OY, OZ, PA, PB, PC, PD, PE, PF, PG, PH, PI, PJ, PK, PL, PM, PN, PO, PP, PQ, PR, PS, PT, PU, PV, PW, PX, PY, PZ, QA, QB, QC, QD, QE, QF, QG, QH, QI, QJ, QK, QL, QM, QN, QO, QP, QQ, QR, QS, QT, QU, QV, QW, QX, QY, QZ, RA, RB, RC, RD, RE, RF, RG, RH, RI, RJ, RK, RL, RM, RN, RO, RP, RQ, RR, RS, RT, RU, RV, RW, RX, RY, RZ, SA, SB, SC, SD, SE, SF, SG, SH, SI, SJ, SK, SL, SM, SN, SO, SP, SQ, SR, SS, ST, SU, SV, SW, SX, SY, SZ, TA, TB, TC, TD, TE, TF, TG, TH, TI, TJ, TK, TL, TM, TN, TO, TP, TQ, TR, TS, TT, TU, TV, TW, TX, TY, TZ, UA, UB, UC, UD, UE, UF, UG, UH, UI, UJ, UK, UL, UM, UN, UO, UP, UQ, UR, US, UT, UY, UZ, VA, VB, VC, VD, VE, VF, VG, VH, VI, VJ, VK, VL, VM, VN, VO, VP, VQ, VR, VS, VT, VU, VV, VW, VX, VY, VZ, WA, WB, WC, WD, WE, WF, WG, WH, WI, WJ, WK, WL, WM, WN, WO, WP, WQ, WR, WS, WT, WU, WV, WW, WX, WY, WZ, XA, XB, XC, XD, XE, XF, XG, XH, XI, XJ, XK, XL, XM, XN, XO, XP, XQ, XR, XS, XT, XU, XV, XW, XX, XY, XZ, YA, YB, YC, YD, YE, YF, YG, YH, YI, YJ, YK, YL, YM, YN, YO, YP, YQ, YR, YS, YT, YU, YV, YW, YX, YY, YZ, ZA, ZB, ZC, ZD, ZE, ZF, ZG, ZH, ZI, ZJ, ZK, ZL, ZM, ZN, ZO, ZP, ZQ, ZR, ZS, ZT, ZU, ZV, ZW, ZX, ZY, ZZ.



# MAP OF CLAY COUNTY, KANSAS

Showing Depth to Water, Location of Wells, Springs, and Test Holes for which  
Records are Given, and Water-Table Contours

By


Kenneth L. Walters and Charles K. Bayne

Bulletin 136

Plate 2

State Geological Survey of Kansas

1954

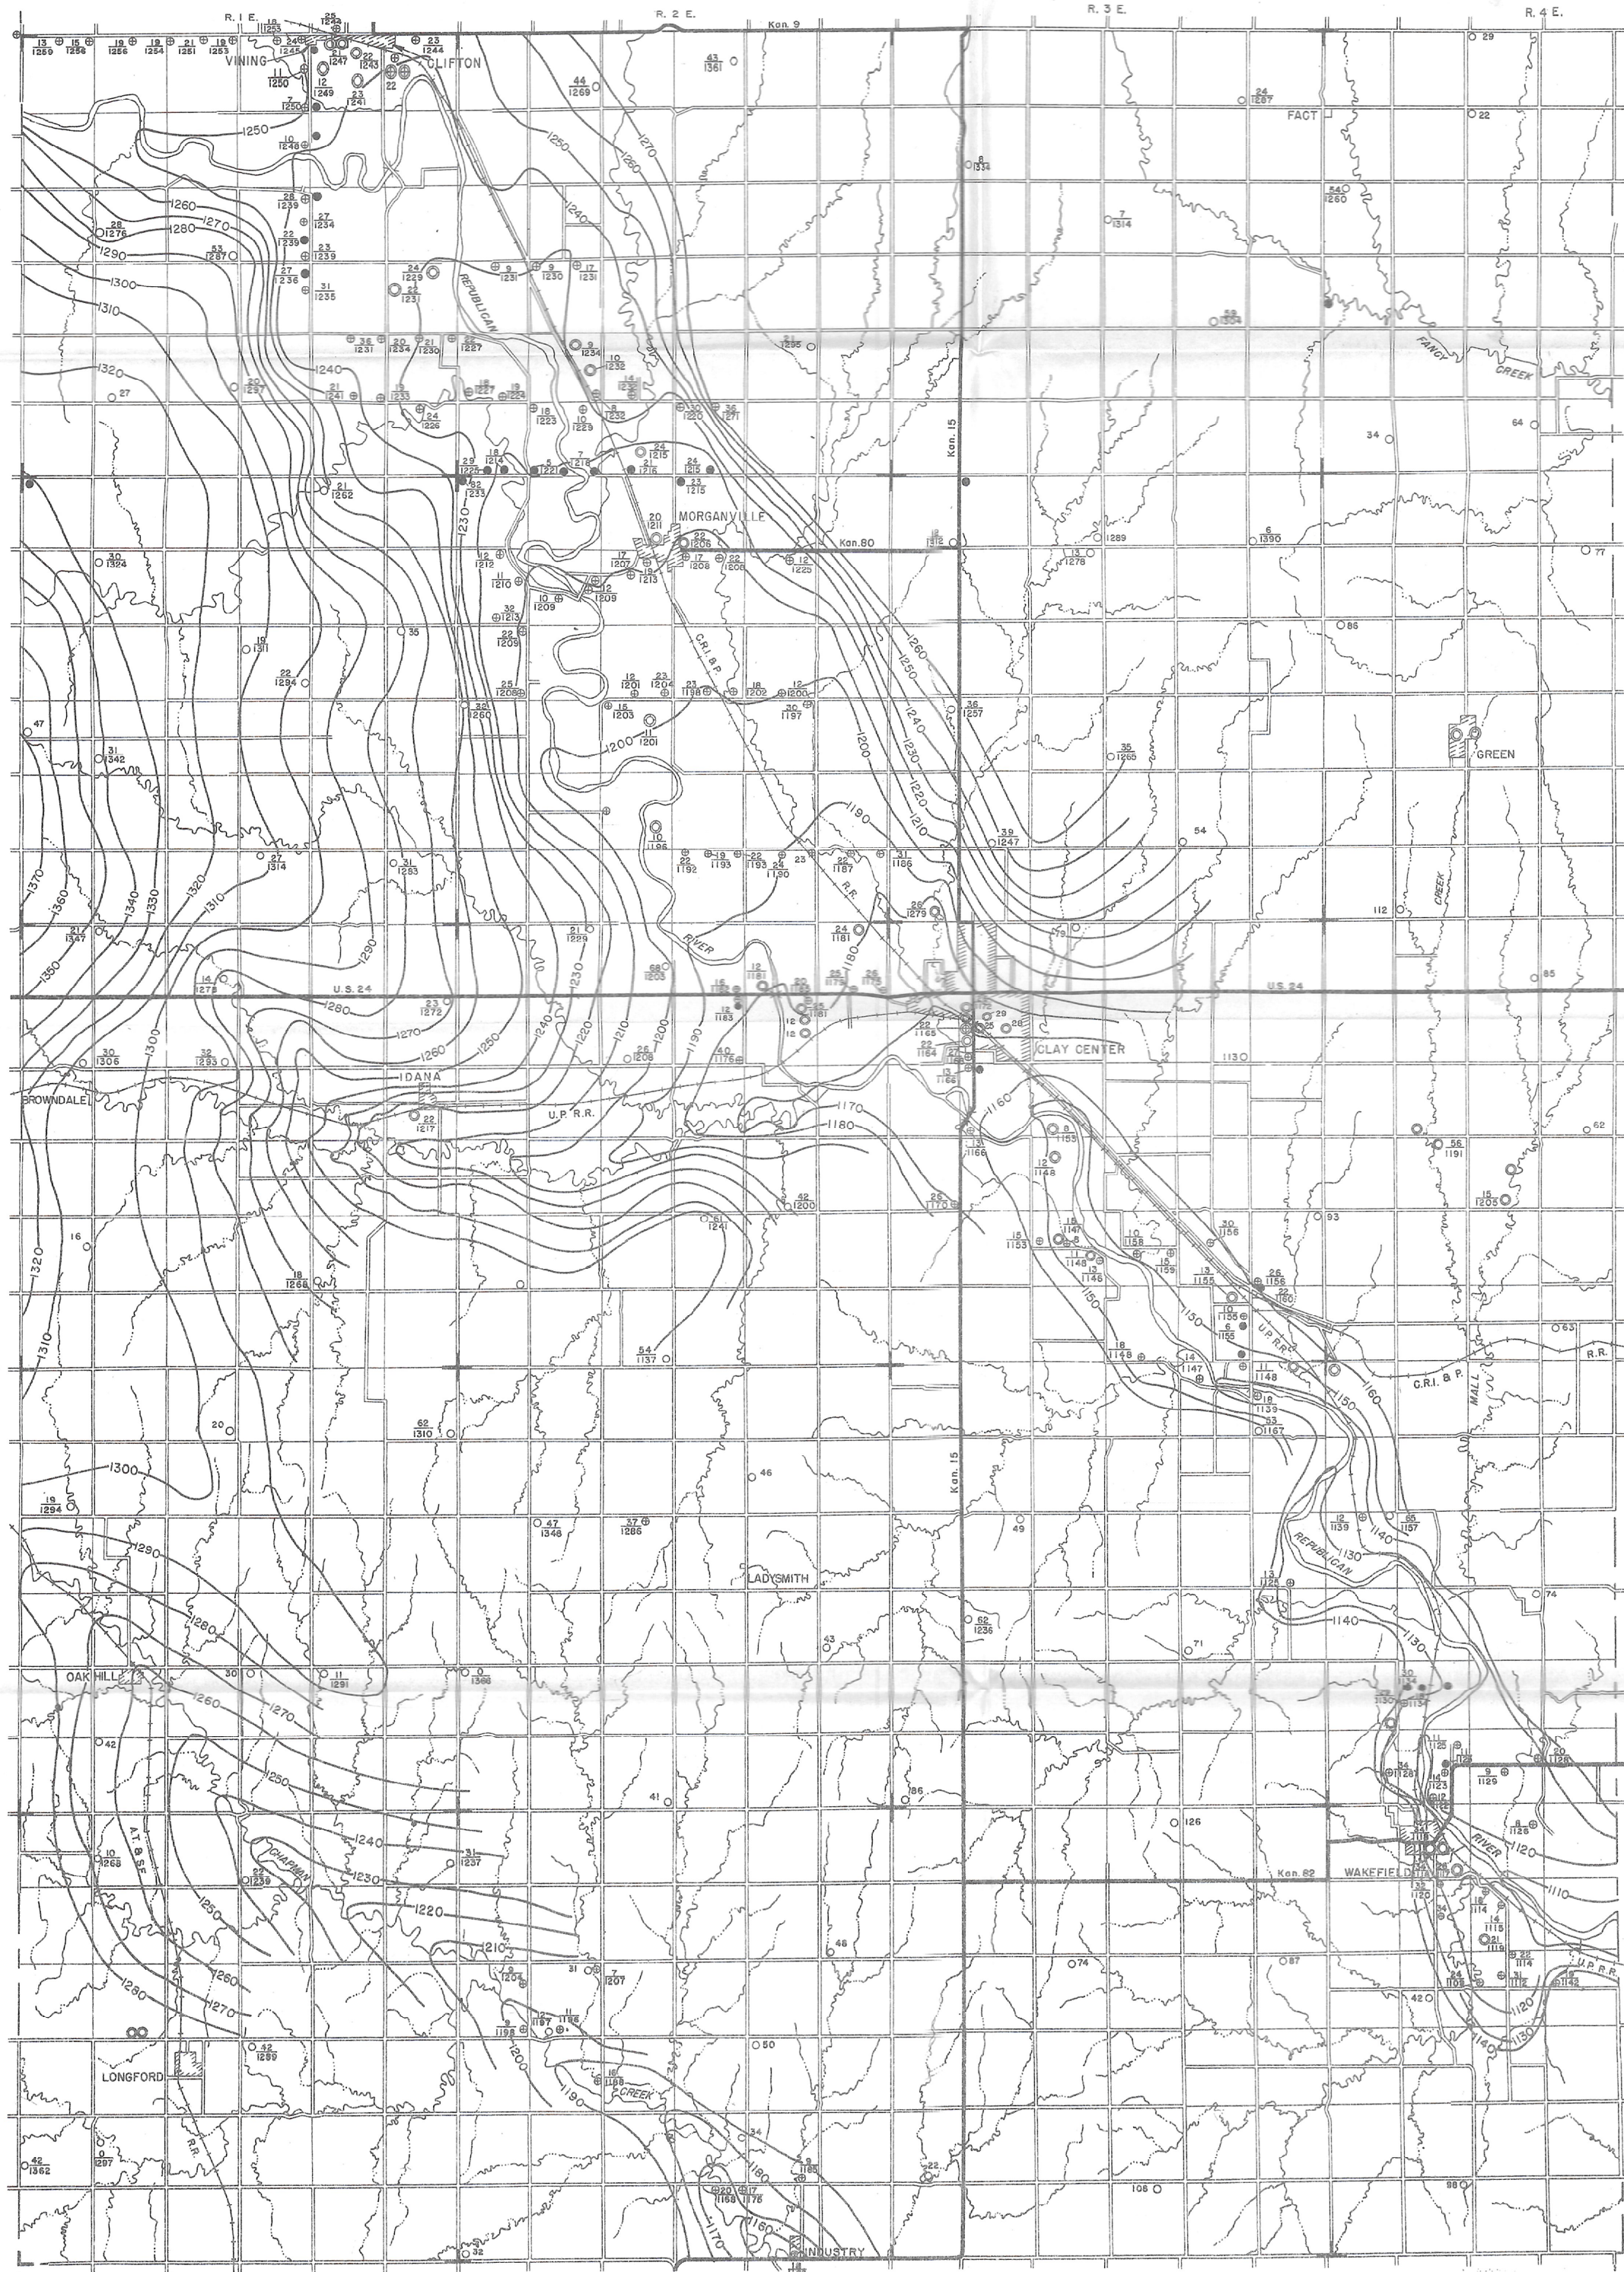

## EXPLANATION

- Domestic or stock well
- Drilled test hole
- ⊙ Augured test hole
- ⊙ Irrigation well
- ⊙ Public supply well
- ⊙ Industrial well
- ⊙ Spring

Upper number refers to depth  
to water level; lower number  
refers to altitude of water level.

— Water-table contours

- Federal or State Highway
- Graded road
- Railroad
- County line (no road)
- Township line (no road)
- Section line (no road)
- Intermittent stream

0 1 2 3 4  
SCALE, IN MILES



# AREAL GEOLOGY OF CLAY COUNTY, KANSAS

By

Kenneth L. Walters and Charles K. Bayne

Bulletin 136

State Geological Survey of Kansas

1958

Plate 1

